



STRIP LIGHT | DELTA SERIES



FORM FACTORS

- 2ft
- 4ft
- 8ft

WATTAGE

- 22W (2ft)
Fixed power output
- 22-28-36-44W (4ft)
Selectable from 4 power outputs
- 48-68-90W (8ft)
Selectable from 3 power outputs

VOLTAGE

120-347V

CCT

- 3000-3500-4000K
Selectable from 3 CCT

DIMMABLE

1-10V

AUXILIARY WIRE

12V DC Line

EFFICACY

up to 138lm/W

CRI

>80

OPERATING TEMPERATURE

-25°C to 40°C

LUMEN MAINTENANCE

- Theoretical L70 at 55°C
>50,000 hrs
- Lumen Maintenance at
36,000hrs at 55°C = 90%

POWER FACTOR

>0.9

TOTAL HARMONIC DISTORTION

<20%

SURGE PROTECTION

- Inherent Surge Protection
- L-N 3kV



PROJECT _____

QTY _____

FIXTURE TYPE _____

DATE _____

MODEL # _____

EELIGHTING REP _____

As variable in function as its namesake, the Delta (SLD) series delivers slim, sleek, and select-able versatility in 2', 4', and 8' strip lengths.

Suitable for 120-347V applications and CCT selectable, the 4' and 8' form factors are also lumen-selectable for even greater in-field customization.

The Delta series also sets itself apart aesthetically with a subtle frosted PMMA curved-edge square lens fitting both modern and traditional environments. It is 1-10V dimmable and is outfitted with a 12V DC auxiliary wire for control customization. The Delta series can be surface or suspension mounted. Wire guards, aircraft cables, and joiner brackets for continuous row mounting are also available optionally.



Visit the product page online
to view the Product Gallery
and Applications Gallery



FINISH

- matte white powder-coated

WARRANTY

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)

CONSTRUCTION

- 22 gauge galvanized steel housing
- frosted, UV-resistant, PMMA curved-edge square lens
- safety cables (for ease of installation & wiring)
- all-in-one lens and LED board

CERTIFICATION & COMPLIANCE

- cUL
- DLC 5.1 Standard
- DLC 5.1 Premium

The basic standard used to investigate products that are UL 1598 ("Luminaires") certified, also conforms to CSA-C22.2 No. 250.0 ("Luminaires").






STRIP LIGHT | DELTA SERIES

MOUNTING


- surface mount (J-box cover included)
- suspension mount (V-hooks included)

DIMENSIONS


2 ft

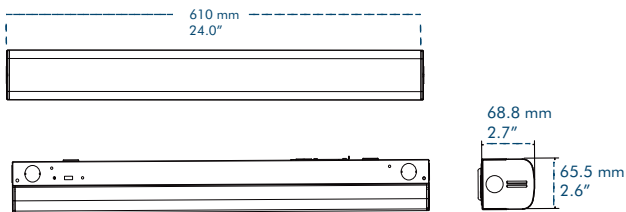

4 ft

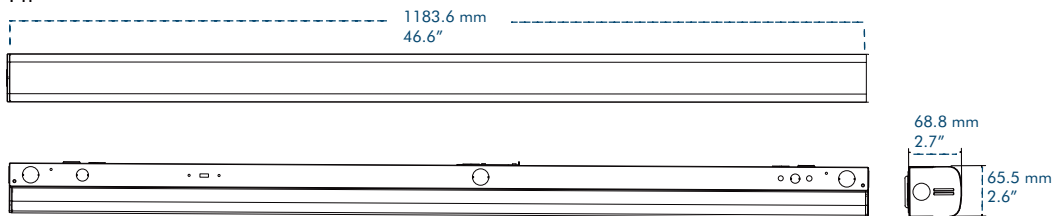

8 ft

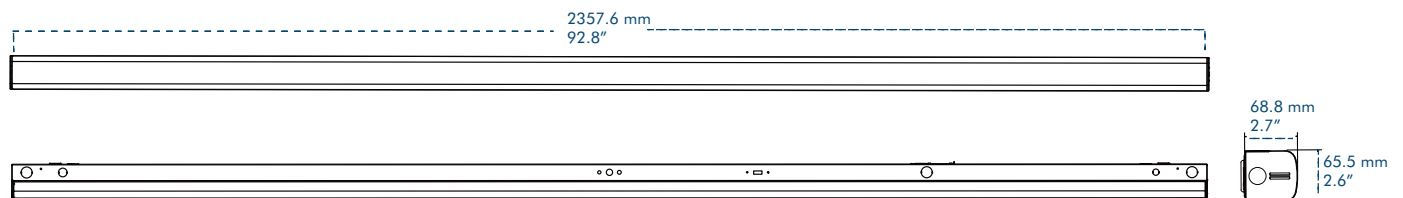



STRIP LIGHT | DELTA SERIES

ORDERING GUIDE

Example Model# (MPN Prefix): **SLD-4-4WS44-3CCTA**



Make it Easy: Use our online configurator

SERIES	FORM FACTOR	WATTAGE	CCT
SLD	2 2ft	22 22W	3CCTA 3000K-3500K-4000K CCT Selectable Default CCT: 3500K
	4 4ft	4WS44 22-28-36-44W selectable Default Wattage: 36W	
	8 8ft	3WS90 48-68-90W selectable Default Wattage: 68W	

PERFORMANCE DATA

Model #	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	CCT (K)	Efficacy (lm/W)
SLD-2-22-3CCTA 120347-D110V-E130 (22W)	2919	22	120-347	3000	133
	3036			3500	138
	2960			4000	135
SLD-4-4WS44-3CCTA 120347V-D110V-E130 (22W)	2924	22	120-347	3000	133
	3041			3500	138
	2965			4000	135
SLD-4-4WS44-3CCTA 120347V-D110V-E130 (28W)	3721	28	120-347	3000	133
	3870			3500	138
	3774			4000	135
SLD-4-4WS44-3CCTA 120347V-D110V-E130 (36W)	4785	36	120-347	3000	133
	4976			3500	138
	4852			4000	135
SLD-4-4WS44-3CCTA 120347V-D110V-E130 (44W)	5848	44	120-347	3000	133
	6082			3500	138
	5930			4000	135
SLD-8-3WS90-3CCTA 120347V-D110V-E130 (48W)	6350	48	120-347	3000	132
	6604			3500	138
	6439			4000	134
SLD-8-3WS90-3CCTA 120347V-D110V-E130 (68W)	8996	68	120-347	3000	132
	9356			3500	138
	9122			4000	134
SLD-8-3WS90-3CCTA 120347V-D110V-E130 (90W)	11907	90	120-347	3000	132
	12383			3500	138
	12074			4000	134

- Delivered lumens are estimated and may vary based on lens option.



STRIP LIGHT | DELTA SERIES


ACCESSORIES & CONTROLS *Sold Separately*

Model#	Description
SLD-U-A2311-JB	Joiner Bracket for Delta Series Luminaires
SLD-4-A2313-WG	Wire Guard for 4ft Delta Series Luminaires
SLD-8-A2314-WG	Wire Guard for 8ft Delta Series Luminaires
SLD-U-A2315-AC	Aircraft Cables for Delta Series Luminaires - 2x 3m each
SMT6033INT	Integrated Microwave Motion Sensor (0-10V) Dimmable; DC 10-15V
RC1030	Remote Control for SMT6033INT
SMI1503	PIR Occupancy Sensor 120-347V, Dimmable*
SMI1500LBL00	Low Bay Lens for SMI1503

*Offset adaptor included

WIREGUARD

4 ft SLD-4-A2313-WG



8 ft SLD-8-A2314-WG






STRIP LIGHT | DELTA SERIES

PHOTOMETRICS


2 ft

SLD-2-22-3CCTA
Model: 4000K
Eff: 139.35lm/W
Nominal Power(W): 22
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 3077.8

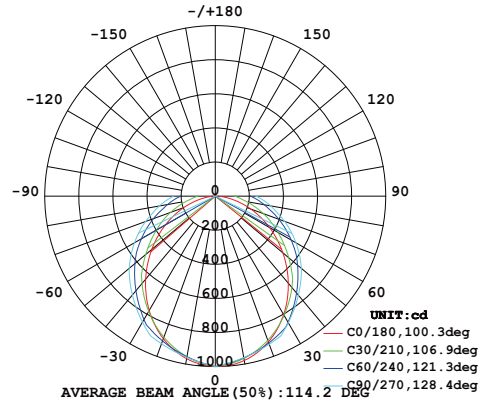


4 ft


SLD-4-4WS44-3CCTA
Model: 4000K
Eff: 153.91lm/W
Nominal Power(W): 22
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 3202.8

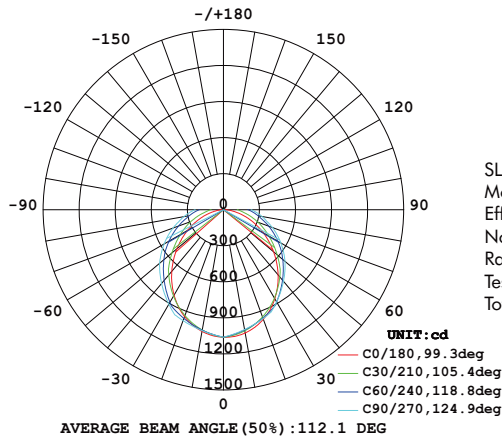


SLD-4-4WS44-3CCTA
Model: 4000K
Eff: 151.64lm/W
Nominal Power(W): 28
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 3928.8

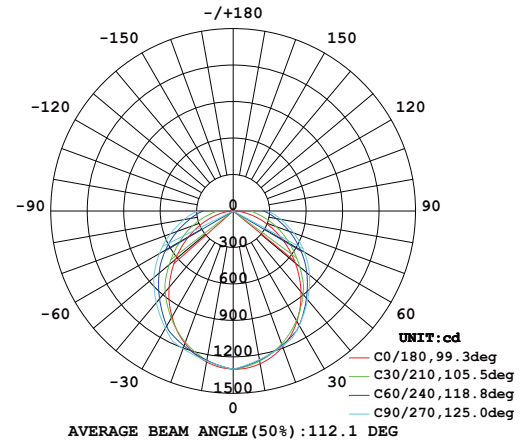

SLD-4-4WS44-3CCTA
Model: 4000K
Eff: 145.58lm/W
Nominal Power(W): 36
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 5069.9

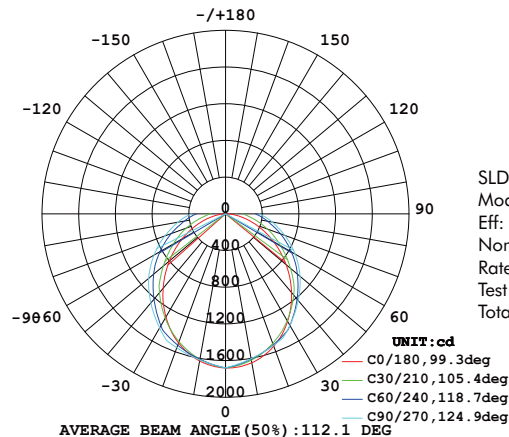

SLD-4-4WS44-3CCTA
Model: 4000K
Eff: 139.49lm/W
Nominal Power(W): 44
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 6212.8

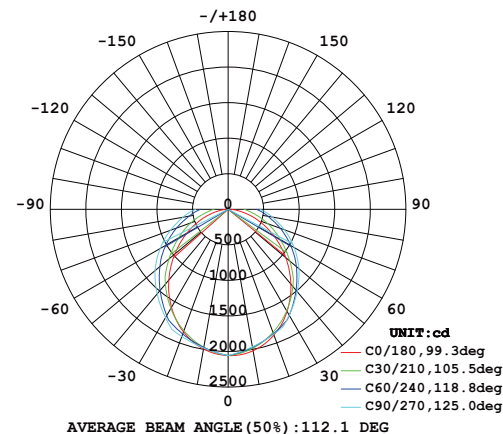




STRIP LIGHT | DELTA SERIES




8 ft


SLD-8-3WS90-3CCTA
Model: 4000K
Eff: 152.92lm/W
Nominal Power(W): 48
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 7886.3

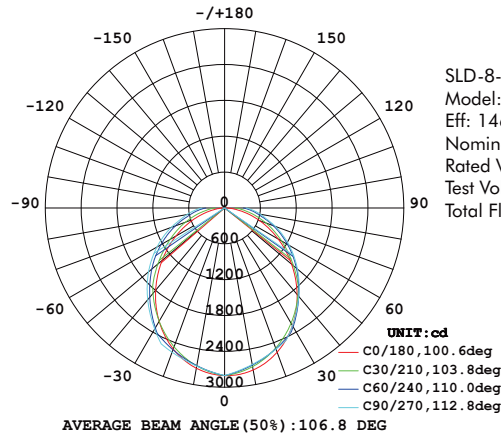

SLD-8-3WS90-3CCTA
Model: 4000K
Eff: 146.81lm/W
Nominal Power(W): 68
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 10277

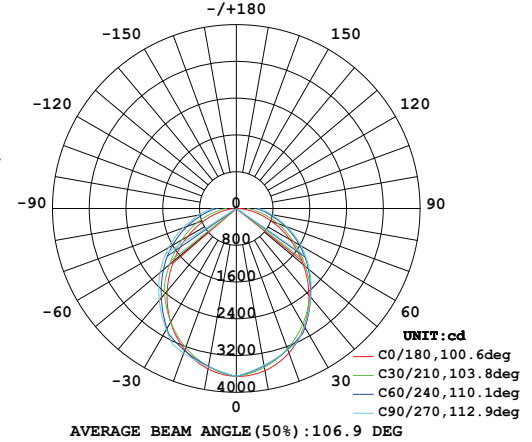

SLD-8-3WS90-3CCTA
Model: 4000K
Eff: 140.05 lm/W
Nominal Power(W): 90
Rated Voltage(V): 120-347V
Test Voltage: 120
Total Flux(lm): 12617

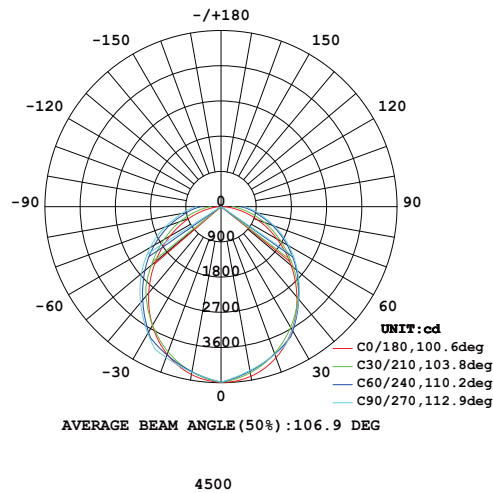

DLC PRODUCT ID TABLE

Model No.	DLC Premium Product ID Primary Use: Stairwell and Passageway Luminaires	DLC Premium Product ID Primary Use: High-Bay Luminaires for Commercial and Industrial Buildings	DLC Standard Product ID Primary Use: Direct Linear Ambient Luminaires
SLD-2-22-3CCTA	S-LUXJ2E	N/A	S-MSK098
SLD-4-4WS44-3CCTA	S-5JA9SB	N/A	S-WK6A3P
SLD-8-3WS90-3CCTA	S-VJX6SA	S-4HCBLS	S-VZAOXW