


T8 /T5 - 2' & 4' VAPOR TIGHT, IP65 WET LOCATION LUMINAIRE (1 OR 2 LAMP)

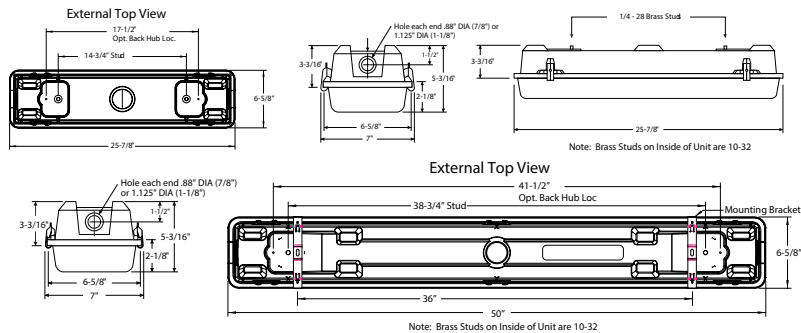

APPLICATION:

The OW1IP series is suitable for wet location areas. Common applications include parking garages, schools, industrial facilities, and stairways.

PRODUCT FEATURES:

Suitable for suspension by chain, cable or pendant and can be surface mounted. All required hardware and mounting brackets are included. Integral molded-latch retention pockets securely locks in polycarbonate latches. Suspension systems are not included. Chain or stainless steel cable are available as options. Stainless steel latches available upon request.

STRUCTURALLY RIGID FIBERGLASS BODY

Fiberglass is reinforced polyester and self-extinguishing (ASTM D635-74). This type of construction prevents the body from flexing during handling and installation.

GASKETED DIFFUSER RETENTION SLOT

- The gasketed inverted-U slot provides a positive continuous seal between body and diffuser
- Continuous-poured gasket completely fills channel for maximum seal integrity

HIGH-IMPACT ACRYLIC/DR DIFFUSER

- Internal crepe pattern allows a smooth exterior surface for ease of cleaning
- The diffuser flange fits snugly into the gasketed retention slot forming a continuous seal
- Optional 95% reflective silver reflector
- CEE qualified ballast comes standard on most fixture options

LISTING

- UL/C-UL listed to US and Canadian standard
- IP65 Rating

WARRANTY

Guaranteed for one year against mechanical defects



Ordering Information > Example: 2-OW1IP-2-32-T8-ADV-10-MVOLT

2	OW1IP								
FIXTURE SIZE	SERIES	# OF LAMPS/LAMP TYPE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR	LAMP INSTALLED			
2- 2'	OW1IP- Oracle Wet Location Vapor Tight	2' FIXTURE 1-17-T8 (1 lamp/17W/T8) 2-17-T8 (2 lamps/17W/T8) 3-17-T8 (3 lamps/17W/T8) 1-14-T5 (1 lamp/14W/T5) 2-14-T5 (2 lamps/14W/T5) 3-14-T5 (3 lamps/14W/T5) 1-24-T5HO (1 lamp/24W/T5HO) 2-24-T5HO (2 lamps/24W/T5HO) 3-24-T5HO (3 lamps/24W/T5HO)	(Blank)- MVOLT (120/277) 120 277 347 480	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF	(Blank)- No lamp L30K- 3000K L35K- 3500K L41K- 4100K L50K- 5000K			
EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)									
ORDER CODE		DESCRIPTION							
EMG-T8-BX-450		Up to 450 L. for T8 or BX							
EMG-T8-BX-600		Up to 600 L. for T8 or BX							
EMG-T8-BX-700		Up to 700 L. for T8 or BX							
EMG-T8-BX-1400		Up to 1400 L. for T8 or BX							
EMG-T5-T5HO-700		Up to 700 L. for T5 or T5HO							
EMG-T5-T5HO-1300		Up to 1300 L. for T5 or T5HO							
EMG-SD-T8-BX-T5-T5HO-1400		Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO							
EMG-ICE-T8-BX-T5-T5HO-1400		ICE Pack 1400 L. for T8, BX, T5 or T5HO							
GTD		Generator Transfer Device							
BALLAST CONFIGURATION & CODE									
32W/T8	28W/T5	17W/T8	54W/T5HO	14W/T5	24W/T5HO	DESCRIPTION			
(Blank)	-	(Blank)	-	-	-	Electronic Instant Start			
EPS	(Blank)	EPS	(Blank)	(Blank)	(Blank)	Electronic Program Start			
ADV-7	-	ADV-7	ADV-7	-	-	Advance Mark-7 ¹			
ADV-10	-	ADV-10	ADV-10	-	ADV-10	Advance Mark-10 ¹			
-	ADV-OPT	-	-	-	-	Advance Optanium ¹			
ADV-ESS	-	ADV-ESS	-	-	-	Advance Essential ¹			
ADV-ROVR	-	ADV-ROVR	ADV-ROVR	-	-	Advance Rover ¹			
LUT-EHD	LUT-EHD	-	LUT-EHD	-	-	Lutron Ecosystem H-Series ¹			
LUT-2W	-	-	-	-	-	Lutron Tu-Wire ¹			
LUT-EC5	LUT-EC5	LUT-EC5	-	LUT-EC5	LUT-EC5	Lutron Ecosystem ¹			
LUT-EC3	LUT-EC3	LUT-EC3	LUT-EC3	LUT-EC3	LUT-EC3	Lutron Eco-10 ¹			
LUT-TVE	-	-	-	-	-	Lutron Tve ¹			
LUT-H3D	LUT-H3D	LUT-H3D	LUT-H3D	LUT-H3D	LUT-H3D	Lutron Hi-Lume 3D ¹			
-	-	-	LUT-ECD	-	-	Lutron Ecosystem (347V Only) ¹			
1- Voltage must be specified for dimming ballast.									
WIRING OPTIONS							OTHER OPTIONS		
PCSB120	- 10' Nema 5-15R 120V Straight Blade Plug						CH	- Heavy Duty Chain	
PCSB277	- 10' Nema 7-15R 277V Straight Blade Plug						MS	- Motion Sensor (Damp location only)	
PCTL120	- 10' Nema L5-15R 120V Twist Lock Plug						MSPH	- Motion Sensor with Photocell	
PCTL277	- 10' Nema L7-15R 277V Twist Lock Plug						GSS	- Grippler Suspension System	
IPTL120	- 10' 120V IP Rated Twist lock Plug						VH	- V Hook	
IPTL277	- 10' 277V IP Rated Twist lock Plug						SSL	- Stainless Steel Latches	
S01	- 10' 120V/277V SO Cord						OW1IPSR	- Specular Reflector	
S02	- 10' 480V SO Cord						SSLTP	- Stain Steel Latches with Tamper-proof	
(Consult Factory for 208V, 248V, 347V and 480V wiring)							PCLTP	- Polycarbonate Latches with Tamper-proof Screws	
							USA	- Made in America Compliance	

¹ - Voltage must be specified for dimming ballast.