
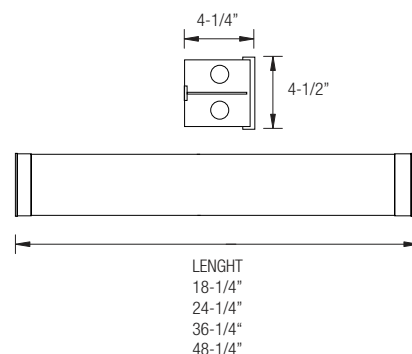


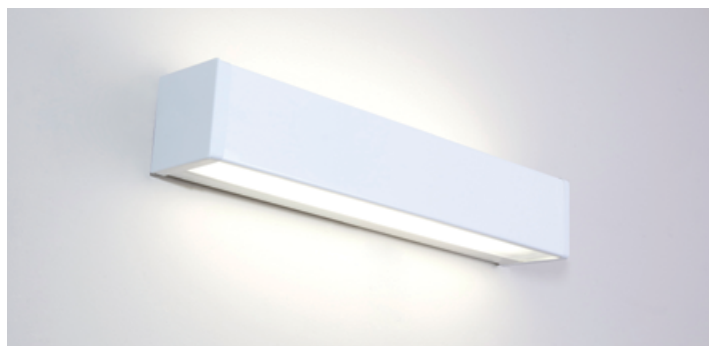

INTENDED USE:

- For use in residential, commercial and hospitality markets
- For wall or vanity application
- Fixture is designed for optional up/ down directional lighting
- Baffle front cover plate is also removable for 180° illumination

PRODUCT FEATURES:

- Comes standard with multi-volt ballast
- Available in prismatic acrylic lens and white end caps
- Individually boxed
- Diffuser easily removed via locking nut at both ends of fixture
- Post-painted body and hemmed edges allow for safe handling and installation
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

OPTIONAL FEATURES:

- Dividers for up/downlight
- Front baffle cover available for light block

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

Ordering Information > Example: 2-OW2B-2-14-T5-MVOLT-EMG-T5-T5HO-700

2	OW2B						
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE	# OF BALLAST	BALLAST FACTOR		
2 - 2'	OW2B-Oracle Fluorescent Wall/Ceiling Bracket	2' FIXTURE 2-14-T5 (2 lamps/14W/T5) 2-24-T5HO (2 lamps/24W/T5HO) 2-17-T8 (2 lamps/17W/T8)	(Blank) - MVOLT (120/277) 120 277 347	(Blank) - 1 Ballast 2 - 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF		

BALLAST CONFIGURATION & CODE

15W/T8	17W/T8	25W/T8	32W/T8	59W/T8	14W/T5	24W/T5HO	21W/T5	39W/T5HO	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	(Blank)	-	(Blank)	(Blank)	-	-	-	-	-	-	Electronic Instant Start
EPS	EPS	(Blank)	EPS	-	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	Electronic Program Start

Consult Factory for ADVANCE or LUTRON dimming ballast options.