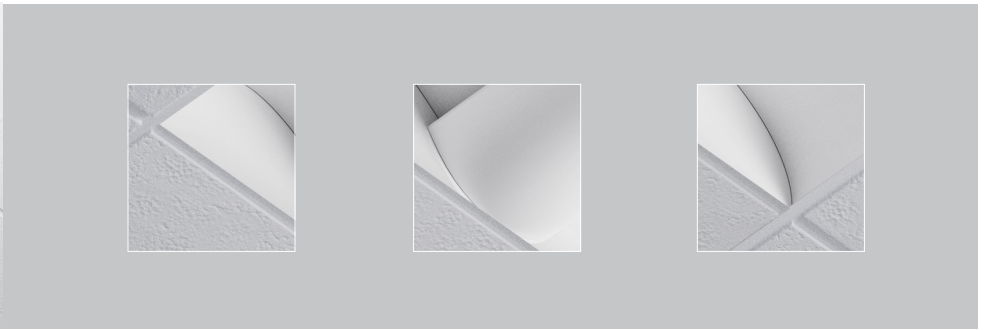


NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
4000	4042	60 W
3000	3059	44 W
2000	1963	28 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OD-LED blends the traditional look of an architectural volumetric troffer. Diffuser is composed of a two-part overlay system that includes a thin frosted acrylic sheet and a steel perforated shield. The system works together to gather the light scattered by the LED and delivers uniform voluminous light. The consistency of the volumetric effect results in optimized visual comfort, enhancing the quality of illumination. The combination of energy savings and optical performance creates the ideal choice for educational, medical, office and retail spaces.

LUMENS	2000, 3000, 4000
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4', 1'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFTB, LUT2W, DIMST, ELDO10.1, ELDO10.1, DALI.1
EMERGENCY	10W - Up to 1000L output (Bodine BSL310) 20W - Up to 2000L output (Bodine BSL20)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The center acrylic diffuser can be removed, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED driver (120V forward phase only).

LUTH - Lutron LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LED DYNAMIC PLATFORM OPTIONS



Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

Listed for DLC, California Title 24 compliant.

Example: **22-OD-LED-4000L-DIM10-MVOLT-30K-85**

22	OD	LED								
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS	
22 - 2' X 2'	OD	LED	2000L - 2000 lumens 3000L - 3000 lumens 4000L - 4000 lumens	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLume LUT2W - Lutron 2Wire ELDO10.1 - EldoLED 0-10V DALI - EldoLED DALI ELDODMX - EldoLED DMX	MVOLT 347* 120 277	30K 35K 40K 50K	85	0-EMG-LED-10W 0-EMG-LED-20W	14FK - 1'x4' Flange Kit SBF - Internal Fast Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance FS-PPV2 - Fixture Sensor Power Pack FD-301 - Low Voltage Daylight Dimming Photosensor LMFC-011 - Digital Lighting Manager FS-205 - Low Voltage Pir Fixture Integrated Occupancy Sensor	

LUT2W are available in 120V only LUT2W up to 4000L

LUTH, ELDO10.1, ELDO10.1, and ELDODMX-1 are available in 120V and 277V

-Reference last page for Control Options

*FD-301 & FS-205 require FS-PPV2- Power Pack

22-OD-LED-2000L-DIM10-MVOLT-40K-85

INPUT WATTS: 28.3

LUMENS: 1963

CRI: 85


EFFICACY: 69

CCT: 4000K

TEST NO.: EL-101521

SPACING CRITERIA: 1.36

Candle Power Distribution (Candelas)



Cone of Light			
2	181	4.6	6.7
4	45.4	9.3	13.4
6	20.2	13.9	20.1
8	11.3	18.5	26.8
10	7.26	23.1	33.5
12	5.04	27.8	40.2
(F.T.) Distance to Plane	(F.C.) Initial Footcandle at Nadir	(F.T.) Beam Vert. Spread	(F.T.) Beam Horiz. Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	263.35	N.A.	13.40
0-30	555.29	N.A.	28.30
0-40	903.06	N.A.	46.00
0-60	1573.49	N.A.	80.20
0-80	1929.27	N.A.	98.30
0-90	1962.87	N.A.	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1479	1769	2056
55	1240	1676	2074
65	936	1510	1978
75	652	1170	1891
85	336	590	1097

Lumens Per Zone

Zone	Lumens
0-10	68.52
10-20	194.82
20-30	291.94
30-40	347.77
40-50	355.68
50-60	314.75
60-70	229.36
70-80	126.42
80-90	33.59

Candela Tabulation

0	0
0	725.991
5	719.120
15	675.370
25	602.170
35	507.380
45	388.970
55	264.570
65	147.210
75	62.780
85	10.880
90	3.110

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%	
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100	
	1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	86	86	84	84	
	2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	72	70	72	70	70	
	3	90	80	72	66	88	78	71	65	75	69	64	73	67	63	70	66	62	59	62	59	59	
	4	83	71	62	56	81	70	62	55	67	60	54	65	59	54	63	57	53	51	56	51	51	
	5	76	63	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44	51	46	44	
	6	70	57	48	42	69	56	48	42	54	47	41	53	46	41	51	45	41	39	45	41	39	
	7	65	52	43	37	64	51	43	37	50	42	37	48	41	36	47	41	36	34	41	36	34	
	8	61	47	39	33	59	47	39	33	45	38	33	44	37	33	43	37	32	30	37	32	30	
	9	57	44	35	30	55	43	35	30	42	35	30	41	34	29	40	34	29	27	34	29	27	
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25	31	27	25		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

22-OD-LED-3000L-DIM10-MVOLT-40K-85

INPUT WATTS: 44.4

LUMENS: 3059

CRI: 85


EFFICACY: 69

CCT: 4000K

TEST NO.: EL-101518

SPACING CRITERIA: 1.36

Candle Power Distribution (Candelas)



Cone of Light			
2	280	4.5	6.7
4	70.5	9.1	13.4
6	31.4	13.6	20
8	17.6	18.2	26.7
10	11.3	22.7	33.4
12	7.84	27.3	40.1
(F.T.) Distance to Plane	(F.C.) Initial Footcandle at Nadir	(F.T.) Beam Vert. Spread	(F.T.) Beam Horiz. Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	409.56	N.A.	13.40
0-30	863.55	N.A.	28.20
0-40	1406.02	N.A.	46.00
0-60	2452.73	N.A.	80.20
0-80	3007.4	N.A.	98.30
0-90	3059.45	N.A.	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2256	2624	3037
55	1886	2444	3034
65	1391	2194	2887
75	947	1635	2727
85	623	971	1980

Lumens Per Zone

Zone	Lumens
0-10	106.55
10-20	303.01
20-30	453.99
30-40	542.46
40-50	555.60
50-60	491.11
60-70	358.70
70-80	195.96
80-90	52.05

Candela Tabulation

0	0
0	1128.785
5	1114.000
15	1040.680
25	924.380
35	773.390
45	593.390
55	402.380
65	218.670
75	91.180
85	20.200
90	4.500

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%	
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100	100	
	1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	86	84	84	84	
	2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	72	70	72	70	70	
	3	91	80	72	66	88	78	71	65	76	69	64	73	67	63	70	66	62	59	62	59	59	
	4	83	71	62	56	81	70	62	55	67	60	54	65	59	54	63	57	53	51	56	51	51	
	5	76	63	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44	51	46	44	
	6	70	57	48	42	69	56	48	42	54	47	41	53	46	41	51	45	41	39	45	41	39	
	7	65	52	43	37	64	51	43	37	50	42	37	48	41	36	47	41	36	34	41	36	34	
	8	61	47	39	33	59	47	39	33	45	38	33	44	37	33	43	37	32	30	37	32	30	
	9	57	43	35	30	55	43	35	30	42	35	30	41	34	29	40	34	29	27	34	29	27	
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25	31	27	25		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

22- OD-LED-4000L-DIM10-MVOLT-40K-85

INPUT WATTS: 60.4

LUMENS: 4042

CRI: 85


EFFICACY: 67

CCT: 4000K

TEST NO.: EL071769

SPACING CRITERIA: 1.42

Candle Power Distribution (Candelas)



Cone of Light			
2	316	9.3	5.3
4	79.1	18.5	10.6
6	35.2	27.8	15.9
8	19.8	37.1	21.2
10	12.7	46.3	26.5
12	8.79	55.6	31.9
(F.T.) Distance to Plane	(F.C.) Initial Footcandle at Nadir	(F.T.) Beam Vert. Spread	(F.T.) Beam Horiz. Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	464.10	11.50	11.50
0-30	989.99	24.50	24.50
0-40	1634.66	40.50	40.40
0-60	2980.08	73.80	73.70
0-80	3858.45	95.60	95.50
0-90	3995.83	99.00	98.90

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3768	3369	3005
55	4019	3401	2773
65	4268	3467	2413
75	4390	3431	1972
85	5160	3774	1948

Lumens Per Zone

Zone	Lumens
0-10	119.84
10-20	344.26
20-30	525.89
30-40	644.67
40-50	690.13
50-60	655.30
60-70	534.70
70-80	343.68
80-90	137.37

Candela Tabulation

	Q
0	1265.957
5	1263.580
15	1235.330
25	1178.620
35	1096.710
45	991.150
55	857.500
65	670.950
75	422.630
85	167.280
90	39.660

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	❑ LEDRU LED Relay Zone Controller 0-10V ¹	❑ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ^{1,4}	❑ CU-4E-FMH Fixture Mount Control Unit ^{1,5}	❑ ZL027 -NOW Intellect Power Control Module ^{1,6}	❑ EN-WCM2-ZB-DR Wireless Control Module ^{1,7}	❑ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ^{1,8}	❑ LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1,9}
	❑ LEDDU LED Zone Controller 0-10V ¹	❑ FCJS-ECO Lutron Vive Eco-system Individual Control Models ^{1,4}		❑ ZL027 -DLE Intellect Power Control Module ^{1,6}	❑ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1,7}		❑ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ^{1,9}
INTEGRAT OCCUPANCY& DAYLIGHT SENSOR	N/A	❑ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	❑ SU-5E-IoT IoT Node Micro Sensor ❑ SU-5E-CL Connected Micro Sensor ❑ SU-5E-IL Independent Micro Sensor ❑ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	❑ ZL00J -TOW Intellect Intelligent Fixture Control System ²	❑ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor	❑ SNS200 SNS200 for grouping ²	❑ FD-301 Fixture integrated Daylight Dimming Sensor ²
				❑ ZL00J-DOW Intellect Intelligent Fixture Control System ²	❑ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	❑ SNS300 SNS300 for networks ²	❑ FS-205 Fixture integrated passive infrared occupancy sensor ²
*WIRELESS OCCUPANCY SENSOR	❑ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted ³	❑ LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	❑ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	❑ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	❑ ELLSU-W-EO Light Level Sensor - Ceiling Mounted ³	❑ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	❑ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	❑ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	❑ SU-5E-IoT IoT Node Micro Sensor ❑ SU-5E-CL Connected Micro Sensor ❑ SU-5E-IL Independent Micro Sensor ❑ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	❑ ZL00J -TOW Intellect Intelligent Fixture Control System ❑ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	❑ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ❑ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	❑ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESSORIES	N/A	N/A	❑ TMC-SU-5E Tile Mount Carrier ❑ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ❑ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.