



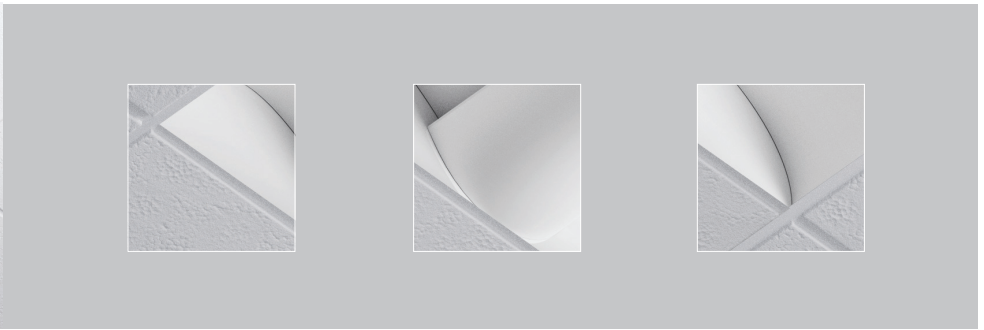

FEATURES

The ODVH-LED blends the traditional look of an architectural volumetric troffer with a center acrylic diffuser, resulting in unmatched optical performance that delivers the latest in LED technology and lens innovation. The integrated LEDs are strategically angled behind the center indirect acrylic diffuser to maximize lumen output and provide even illumination across the full face of the luminaire. The consistency of the volumetric effect results in optimized visual comfort, enhancing the quality of illumination. The combination of energy savings and optical performance creates the ideal choice for educational, medical, office and retail spaces.

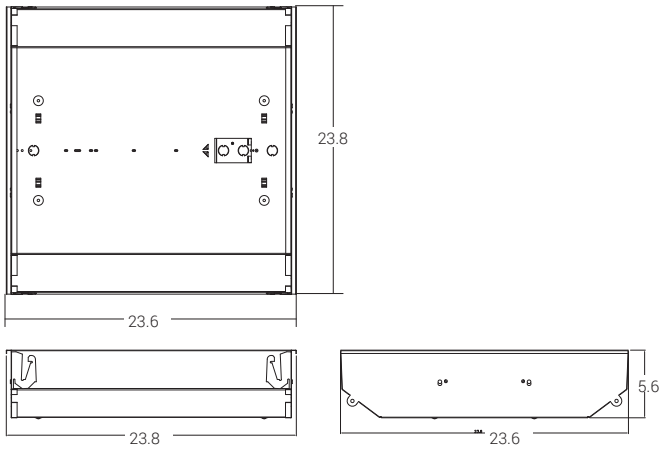

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
6000	6996	59 W
5000	5657	47 W
4000	4747	39 W
3400	3705	28 W
2400	2818	23 W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

LUMENS	2400, 3400, 4000, 5000, 6000
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+ (standard), 90+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4', 1'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFTB, LUT2W, DIMST, ELDO10.1, ELDODMX.1, DALI.1
EMERGENCY	10W - Up to 1000L output 20W - Up to 2000L output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory) EMG-LED-G2-20W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The center acrylic diffuser can be removed, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED driver (120V forward phase only).

LUTH - Lutron LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LED DYNAMIC PLATFORM OPTIONS



Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

Listed for DLC, California Title 24 compliant.

Example: **22-ODVH-LED-4000L-DIM10-MVOLT-30K-85**

22	ODVH	LED								
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS	
22 - 2' X 2'	ODVH - LED Volumetric Troffer	LED	2400L - 2400 lumens 3400L - 3400 lumens 4000L - 4000 lumens 5000L - 5000 lumens 6000L - 6000 lumens	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLume LUT2W - Lutron 2Wire ELDO10.1 - EldoLED 0-10V DALI - EldoLED DALI ELDODMX - EldoLED DMX	MVOLT 347* 120 277	30K 35K 40K 50K	85 90	0-EMG-LED-10W 0-EMG-LED-20W 0-EMG-LED-G2-10W-SDT 0-EMG-LED-G2-20W-SDT	22FK - 2'x2' Flange Kit SBF - Internal Fast Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance FS-PPV2 - Fixture Sensor Power Pack FD-301 - Low Voltage Daylight Dimming Photosensor LMFC-011 - Digital Lighting Manager FS-205 - Low Voltage Pir Fixture Integrated Occupancy Sensor	

*Consult factory for details

*Consult factory for details

LUT2W are available in 120V only LUT2W up to 4000L

LUTH, ELDO10.1, ELDO10.1, and ELDODMX-1 are available in 120V and 277V

-Reference last page for Control Options

*FD-301 & FS-205 require FS-PPV2- Power Pack

22-ODVH-LED-2400L-DIM10-MVOLT-40K-85

INPUT WATTS: **23.8**

LUMENS: **2818**

CRI: **85**


EFFICACY: **118**

CCT: **4000K**

TEST NO.: **EL1118112**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	323.78	N.A.	11.50
0-30	689.76	N.A.	24.50
0-40	1136.82	N.A.	40.30
0-60	2062.2	N.A.	73.20
0-80	2699.46	N.A.	95.80
0-90	2793.48	N.A.	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2564	2368	2167
55	2715	2401	2072
65	2953	2490	1948
75	3388	2696	1739
85	3512	3022	1313

Lumens Per Zone

Zone	Lumens
0-10	83.66
10-20	240.13
20-30	365.97
30-40	447.07
40-50	475.07
50-60	450.30
60-70	376.96
70-80	260.30
80-90	94.03

Candela Tabulation

0	0
0	883.922
5	881.540
15	857.940
25	814.860
35	753.270
45	674.380
55	579.260
65	464.210
75	326.120
85	113.850
90	2.270

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAPACITY RATIO	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	86	87	85	83	81	
	2	97	88	81	75	94	86	79	74	82	77	72	79	74	70	76	72	68	66	
	3	88	77	68	61	85	75	67	61	72	65	59	69	63	58	66	61	57	55	
	4	80	68	58	51	78	66	58	51	64	56	50	61	55	49	59	53	49	46	
	5	74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40	
	6	68	54	45	38	66	53	44	38	51	43	38	49	42	37	48	41	37	35	
	7	63	49	40	34	61	48	39	33	46	39	33	45	38	33	43	37	32	30	
8	59	45	36	30	57	44	36	30	42	35	29	41	34	29	40	34	29	27		
9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24		
10	51	38	30	24	50	37	29	24	36	29	24	35	28	24	34	28	24	22		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

2	221	9.1	5.6
4	55.2	18.2	11.1
6	24.6	27.4	16.7
8	13.8	36.5	22.2
10	8.84	45.6	27.8
12	6.14	54.7	33.3

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

22-ODVH-LED-3400L-DIM10-MVOLT-40K-85

INPUT WATTS: **28.7**

LUMENS: **3705**

CRI: **85**


EFFICACY: **129**

CCT: **4000K**

TEST NO.: **EL1118110**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	422.99	N.A.	11.40
0-30	901.07	N.A.	24.30
0-40	1486.64	N.A.	40.10
0-60	2705.52	N.A.	73.00
0-80	3547.59	N.A.	95.80
0-90	3672.35	N.A.	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3357	3095	2833
55	3554	3141	2712
65	3867	3259	2570
75	4437	3577	2306
85	4671	4002	1747

Lumens Per Zone

Zone	Lumens
0-10	109.28
10-20	313.71
20-30	478.08
30-40	585.58
40-50	625.57
50-60	593.31
60-70	497.24
70-80	344.83
80-90	124.76

Candela Tabulation

0	0
0	1154.491
5	1153.598
15	1122.634
25	1066.622
35	986.290
45	882.922
55	758.152
65	607.871
75	427.170
85	151.411
90	3.184

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	81	
	2	97	88	81	74	94	86	79	73	82	77	72	79	74	70	76	72	68	66	
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	55	
	4	80	68	58	51	78	66	58	51	64	56	50	61	54	49	59	53	48	46	
	5	74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40	
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	41	37	34	
	7	63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30	
	8	58	45	36	30	57	44	35	30	42	35	29	41	34	29	40	34	29	27	
	9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	30	26	24	
10	51	38	29	24	50	37	29	24	36	29	24	35	28	24	34	28	24	22		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

2	289	9.1	5.6
4	72.2	18.3	11.2
6	32.1	27.4	16.8
8	18	36.6	22.4
10	11.5	45.7	27.9
12	8.02	54.9	33.5

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

22-ODVH-LED-4000L-DIM10-MVOLT-40K-85

INPUT WATTS: **39.4**

LUMENS: **4747**

CRI: **85**


EFFICACY: **120**

CCT: **4000K**

TEST NO.: **EL1118110**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	543.09	N.A.	11.40
0-30	1156.93	N.A.	24.40
0-40	1906.85	N.A.	40.20
0-60	3465.12	N.A.	73.00
0-80	4545.4	N.A.	95.70
0-90	4705.71	N.A.	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	4323	3985	3644
55	4582	4044	3486
65	4980	4203	3282
75	5724	4557	2966
85	5963	5166	2249

Lumens Per Zone

Zone	Lumens
0-10	140.31
10-20	402.78
20-30	613.84
30-40	749.92
40-50	798.04
50-60	760.23
60-70	638.23
70-80	442.05
80-90	160.31

Candela Tabulation

0	0
0	1482.763
5	1485.196
15	1445.684
25	1372.994
35	1269.988
45	1137.012
55	977.608
65	782.914
75	551.018
85	193.315
90	4.055

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	101	101	101	99
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	81	81
	2	97	88	81	74	94	86	79	73	82	77	72	79	74	70	76	72	68	66	66
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	55	55
	4	80	68	58	51	78	66	58	51	64	56	50	61	54	49	59	53	48	46	46
	5	74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40	40
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	41	37	35	34
	7	63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30	30
	8	58	45	36	30	57	44	35	30	42	35	29	41	34	29	40	34	29	27	27
	9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24	24
10	51	38	30	24	50	37	29	24	36	29	24	35	28	24	34	28	24	24	22	

22-ODVH-LED-5000L-DIM10-MVOLT-40K-85

INPUT WATTS: **47**

LUMENS: **5657**

CRI: **85**


EFFICACY: **120**

CCT: **4000K**

TEST NO.: **EL1118108**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	647.97	N.A.	11.50
0-30	1380.46	N.A.	24.40
0-40	2275.3	N.A.	40.20
0-60	4129.08	N.A.	73.00
0-80	5415.45	N.A.	95.70
0-90	5607.27	N.A.	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	5184	4778	4354
55	5485	4854	4167
65	5966	5044	3921
75	6829	5466	3556
85	7144	6139	2730

Lumens Per Zone

Zone	Lumens
0-10	167.42
10-20	480.55
20-30	732.49
30-40	894.84
40-50	950.97
50-60	902.81
60-70	759.54
70-80	526.82
80-90	191.82

Candela Tabulation

0	90
0	1770.025
5	1783.010
15	1734.550
25	1647.360
35	1522.990
45	1363.360
55	1170.250
65	937.910
75	657.390
85	231.600
90	13.800

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

Cone of Light			
2	443	9	5.5
4	111	18.1	11
6	49.2	27.1	16.5
8	27.7	36.1	22.1
10	17.7	45.2	27.6
12	12.3	54.2	33.1
(FT.) Distance to Plane	(FC.) Initial Footcandle at Nadir	(FT.) Beam Vert. Spread	(FT.) Beam Horiz. Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

ROOM CAVITY RATIO	RC				80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99									
1		107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	80									
2		97	88	81	74	94	86	79	73	82	77	72	79	74	70	76	72	68	66									
3		88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	55									
4		80	68	58	51	78	66	58	51	64	56	50	61	55	49	59	53	48	46									
5		74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40									
6		68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	41	37	34									
7		63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30									
8		58	45	36	30	57	44	35	30	42	35	29	41	34	29	40	34	29	27									
9		55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24									
10		51	38	30	24	50	37	29	24	36	29	24	35	28	24	34	28	24	22									

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

22-ODVH-LED-6000L-DIM10-MVOLT-40K-85

INPUT WATTS: **59.4**

LUMENS: **6996**

CRI: **85**


EFFICACY: **118**

CCT: **4000K**

TEST NO.: **EL1118109**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	801.95	N.A.	11.50
0-30	1708.34	N.A.	24.40
0-40	2815.58	N.A.	40.20
0-60	5107.64	N.A.	73.00
0-80	6696.71	N.A.	95.70
0-90	6934.49	N.A.	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	6428	5919	5384
55	6804	6012	5151
65	7406	6251	4847
75	8468	6778	4360
85	8863	7571	3363

Lumens Per Zone

Zone	Lumens
0-10	207.21
10-20	594.74
20-30	906.39
30-40	1107.24
40-50	1176.66
50-60	1115.41
60-70	937.35
70-80	651.71
80-90	237.78

Candela Tabulation

0	90
0	2190.970
5	2209.828
15	2149.940
25	2042.181
35	1888.507
45	1690.664
55	1451.583
65	1164.256
75	815.254
85	287.338
90	16.938

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

Cone of Light			
2	548	9	5.5
4	137	18	11
6	60.9	27	16.5
8	34.2	36	22
10	21.9	45	27.5
12	15.2	54	33
(FT.) Distance to Plane	(FC.) Initial Footcandle at Nadir	(FT.) Beam Vert. Spread	(FT.) Beam Horiz. Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

ROOM CAVITY RATIO	RC				80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99									
1		107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	80									
2		97	88	81	74	94	86	79	73	82	77	72	79	74	70	76	72	68	66									
3		88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	55									
4		80	68	58	51	78	66	58	51	64	56	50	61	55	49	59	53	48	46									
5		74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40									
6		68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	41	37	34									
7		63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30									
8		58	45	36	30	57	44	35	30	42	35	29	41	34	29	40	34	29	27									
9		55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24									
10		51	38	30	24	50	37	29	24	36	29	24	35	28	24	34	28	24	22									

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	❑ LEDRU LED Relay Zone Controller 0-10V ¹	❑ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ¹⁴	❑ CU-4E-FMH Fixture Mount Control Unit ¹⁵	❑ ZL027 -NOW Intellect Power Control Module ¹⁶	❑ EN-WCM2-ZB-DR Wireless Control Module ¹⁷	❑ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ¹⁸	❑ LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹
	❑ LEDDU LED Zone Controller 0-10V ¹	❑ FCJS-ECO Lutron Vive Eco-system Individual Control Models ¹⁴		❑ ZL027 -DLE Intellect Power Control Module ¹⁶	❑ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ¹⁷		❑ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ¹⁹
INTEGRAT OCCUPANCY& DAYLIGHT SENSOR	N/A	❑ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	❑ SU-5E-IoT IoT Node Micro Sensor ❑ SU-5E-CL Connected Micro Sensor ❑ SU-5E-IL Independent Micro Sensor ❑ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	❑ ZL00J -TOW Intellect Intelligent Fixture Control System ²	❑ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor	❑ SNS200 SNS200 for grouping ²	❑ FD-301 Fixture integrated Daylight Dimming Sensor ²
				❑ ZL00J-DOW Intellect Intelligent Fixture Control System ²	❑ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	❑ SNS300 SNS300 for networks ²	❑ FS-205 Fixture integrated passive infrared occupancy sensor ²
*WIRELESS OCCUPANCY SENSOR	❑ E0SCU-W-E0 Occupancy Sensor - Ceiling Mounted ³	❑ LRF2-OCR2B-P-WH Ceiling mount 360° , occupancy/vacancy sensor ³	N/A	N/A	❑ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	❑ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	❑ ELLSU-W-E0 Light Level Sensor - Ceiling Mounted ³	❑ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	❑ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	❑ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	❑ SU-5E-IoT IoT Node Micro Sensor ❑ SU-5E-CL Connected Micro Sensor ❑ SU-5E-IL Independent Micro Sensor ❑ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	❑ ZL00J -TOW Intellect Intelligent Fixture Control System ❑ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	❑ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ❑ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	❑ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESORIES	N/A	N/A	❑ TMC-SU-5E Tile Mount Carrier ❑ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ❑ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I intellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.