
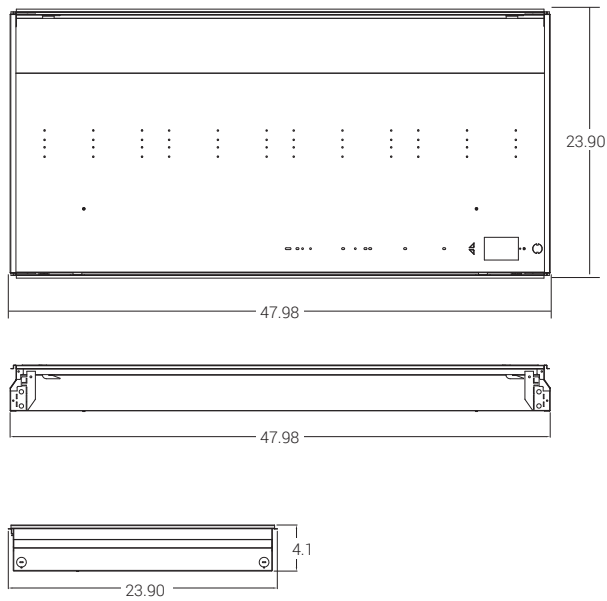


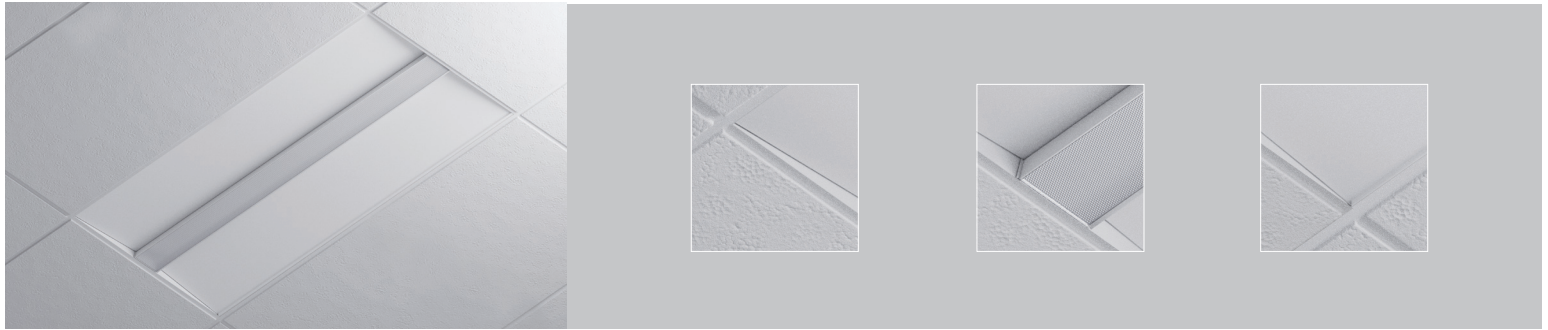

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
10000	10345	83 W
8000	8439	70 W
7000	7243	64 W
6000	6847	52 W
5000	5830	41 W
4000	4157	35 W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OD1V-LED combines exquisite style with uncompromised performance, featuring a fully-illuminated lens that creates a floating visual effect, blending seamlessly with the ceiling. The combination of a micro-prism center optical lens and an angled backlit lens creates a volumetric, uniform appearance, delivering a high angled distribution and higher intensity of illumination across the work plane. The glare-free illumination, high efficiency and sustainability of the luminaire makes it the ideal source for corporate offices, educational, healthcare, commercial, and retail applications.

LUMENS	4000, 5000, 6000, 7000, 8000, 10000
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+ (standard), 90+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4', 1'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELDO10.1, ELDODMX.1, DALI.1
EMERGENCY	10W - Up to 1000L output 20W - Up to 2000L output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory) EMG-LED-G2-20W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 167,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The micro-prism center optical lens door assembly is hinged, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED driver (120V forward phase only).

LUTH - Lutron LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LED DYNAMIC PLATFORM OPTIONS

 Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)

 Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)

 RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

Listed for DLC, California Title 24 compliant.

Example: **24-OD1V-LED-4000L-DIM10-MVOLT-30K-85**

24	OD1V	LED							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS
24 - 2' X 4'	OD1V - LED Volumetric Troffer	LED	4000L - 4000 lumens 5000L - 5000 lumens 6000L - 6000 lumens 7000L - 7000 lumens 8000L - 8000 lumens 10000L - 10000 lumens	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLume LUT2W - Lutron 2Wire ELDO10.1 - EldoLED 0-10V DALI.1 - EldoLED DALI ELDODMX.1 - EldoLED DMX	MVOLT 347* 120 277	30K 35K 40K 50K	85 90	0-EMG-LED-10W 0-EMG-LED-20W 0-EMG-LED-G2-10W-SDT 0-EMG-LED-G2-20W-SDT	24FK - 2'x4' Flange Kit FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance FS-PPV2 - Fixture Sensor Power Pack FD-301 - Low Voltage Daylight Dimming Photosensor LMFC-011 - Digital Lighting Manager FS-205 - Low Voltage Pir Fixture Integrated Occupancy Sensor

DIMST up to 8000L

LUTH up to 8000L

LUT2W are available in 120V only LUT2W up to 5000L

LUTH, ELDO10.1, ELDODALI.1, and ELDODMX.1 are available in 120V and 277V

-Reference last page for Control Options


*FD-301 & FS-205 require FS-PPV2- Power Pack

24-OD1V-LED-4000L-DIM10-MVOLT-40K-85

INPUT WATTS: **34.4** LUMENS: **4157** CRI: **85** EFFICACY: **121** CCT: **4000K** TEST NO.: **EL091719103**

SPACING CRITERIA: **1.28**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	614.88	14.80	14.80
0-30	1290.38	31.00	31.00
0-40	2062.97	49.60	49.60
0-60	3389.91	81.50	81.50
0-80	4043.56	97.30	97.30
0-90	4122.24	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1898	1843	1649
55	1629	1568	1332
65	1436	1240	1281
75	1311	1184	1186
85	1016	946	1213

Lumens Per Zone

Zone	Lumens
0-10	160.35
10-20	454.53
20-30	675.50
30-40	772.59
40-50	732.79
50-60	594.15
60-70	412.45
70-80	241.20
80-90	78.68

Candela Tabulation

0	0
0.0	1696.873
5.0	1693.520
15.0	1622.680
25.0	1497.360
35.0	1295.620
45.0	998.340
55.0	695.130
65.0	451.360
75.0	252.350
85.0	65.880
90.0	8.920

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	RW	80%				70%				50%				30%				10%				0%			
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	99	99	99	99	99	99
1	109	104	100	97	106	102	98	95	98	95	92	94	91	89	90	88	86	84	84	84	84	84	84	84	84
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	76	73	71	71	71	71	71	71	71	71
3	91	81	73	67	89	80	72	67	77	70	65	74	68	64	71	67	63	61	61	61	61	61	61	61	61
4	84	72	64	58	82	71	63	57	68	62	56	66	60	55	64	59	55	52	52	52	52	52	52	52	52
5	77	65	56	50	75	64	56	50	62	55	49	60	53	49	58	52	48	46	46	46	46	46	46	46	46
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	42	40	40	40	40	40	40	40	40
7	67	54	45	39	65	53	45	39	51	44	39	50	43	38	48	42	38	36	36	36	36	36	36	36	36
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	44	39	34	32	32	32	32	32	32	32	32
9	58	45	37	32	57	45	37	32	43	36	31	42	36	31	41	35	31	29	29	29	29	29	29	29	29
10	55	42	34	29	53	41	34	29	40	33	29	39	33	28	38	32	28	27	27	27	27	27	27	27	27


RC - Ceiling Cavity Reflectance

24-OD1V-LED-5000L-DIM10-MVOLT-40K-85

INPUT WATTS: **41.7** LUMENS: **5830** CRI: **85** EFFICACY: **140** CCT: **4000K** TEST NO.: **EL121842**

SPACING CRITERIA: **1.18**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	996.24	17.10	17.10
0-30	2057.95	35.30	35.30
0-40	3181.84	54.60	54.60
0-60	4866.69	83.50	83.50
0-80	5665.98	97.30	97.20
0-90	5780.43	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1655	2136	3324
55	1380	1630	2667
65	1280	1421	2043
75	1235	1413	1829
85	978	1487	2341

Lumens Per Zone

Zone	Lumens
0-10	259.08
10-20	737.16
20-30	1061.71
30-40	1123.88
40-50	964.45
50-60	720.40
60-70	494.83
70-80	304.47
80-90	114.45

Candela Tabulation

0	0
0	2738.88
5	2733.20
15	2561.13
25	2052.28
35	1358.48
45	870.39
55	588.95
65	402.45
75	237.77
85	63.43
90	5.85

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	RW	80%				70%				50%				30%				10%				0%			
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	99	99	99	99	99	99
1	110	105	101	98	107	103	99	96	98	95	92	94	91	89	90	88	86	84	84	84	84	84	84	84	84
2	101	93	87	82	98	91	85	80	87	83	79	84	80	77	81	78	75	73	73	73	73	73	73	73	73
3	93	83	75	69	90	81	74	69	78	72	67	75	70	66	73	69	65	63	63	63	63	63	63	63	63
4	85	74	66	60	83	73	65	60	70	64	59	68	62	58	66	61	57	55	55	55	55	55	55	55	55
5	79	67	59	53	77	66	58	52	64	57	52	62	56	51	60	55	51	49	49	49	49	49	49	49	49
6	74	61	53	47	72	60	52	47	58	51	46	57	50	46	55	49	45	43	43	43	43	43	43	43	43
7	69	56	48	42	67	55	47	42	53	46	41	52	46	41	51	45	41	39	39	39	39	39	39	39	39
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35	35	35	35	35	35	35	35
9	60	47	40	34	59	47	39	34	46	39	34	45	38	34	43	38	34	32	32	32	32	32	32	32	32
10	57	44	36	31	55	43	36	31	42	36	31	41	35	31	41	35	31	29	29	29	29	29	29	29	29

RC - Ceiling Cavity Reflectance


RW - Wall Reflectance

24-OD1V-LED-6000L-DIM10-MVOLT-40K-85

INPUT WATTS: **52** LUMENS: **6852** CRI: **85** EFFICACY: **132** CCT: **4000K** TEST NO.: **EL121845**

SPACING CRITERIA: **1.16**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1214.39	17.70	17.70
0-30	2496.84	36.50	36.40
0-40	3836.28	56.00	56.00
0-60	5794.86	84.60	84.60
0-80	6690.33	97.70	97.60
0-90	6797.96	99.30	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1927	2603	3940
55	1618	1971	3061
65	1474	1690	2280
75	1338	1631	1984
85	754	1378	2255

Lumens Per Zone

Zone	Lumens
0-10	316.52
10-20	897.87
20-30	1282.45
30-40	1339.44
40-50	1129.29
50-60	829.28
60-70	561.22
70-80	334.25
80-90	107.63

Candela Tabulation

0	0
0	3347.27
5	3336.24
15	3101.53
25	2425.42
35	1578.10
45	1013.89
55	690.48
65	463.38
75	257.66
85	48.89
90	2.58

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	110	106	102	98	107	103	100	97	99	96	93	95	93	90	91	89	88	86			
	2	101	94	87	82	98	92	86	81	88	83	79	85	81	77	82	78	76	74			
	3	93	84	76	70	91	82	75	70	79	73	68	76	71	67	74	69	66	64			
	4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56			
	5	80	68	59	54	78	67	59	53	65	60	53	63	57	52	61	56	51	49			
	6	74	62	54	48	72	61	53	47	59	52	47	57	51	47	56	50	46	44			
	7	69	57	48	43	67	56	48	43	54	47	42	53	47	42	51	46	42	40			
	8	65	52	44	39	63	51	44	39	50	43	38	49	43	38	48	42	38	36			
	9	61	48	40	35	59	47	40	35	46	40	35	45	39	35	44	39	34	33			
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	41	36	32	30				

24-OD1V-LED-7000L-DIM10-MVOLT-40K-85

TEST NO.: EL121845

INPUT WATTS: 62

LUMENS: 7247


CRI: 85

EFFICACY: 117

CCT: 4000K

SPACING CRITERIA: 1.16

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1284.18	17.70	17.70
0-30	2640.55	36.50	36.40
0-40	4057.48	56.00	56.00
0-60	6128.78	84.60	84.60
0-80	7076.15	97.70	97.60
0-90	7190.16	99.30	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2043	2756	4167
55	1711	2083	3238
65	1561	1786	2412
75	1422	1722	2089
85	813	1463	2374

Lumens Per Zone

Zone	Lumens
0-10	334.68
10-20	949.51
20-30	1356.37
30-40	1416.93
40-50	1194.56
50-60	876.74
60-70	593.79
70-80	353.57
80-90	114.01

Candela Tabulation

0	0
0	3538.664
5	3520.810
15	3277.240
25	2569.300
35	1672.560
45	1074.450
55	730.110
65	490.720
75	273.770
85	52.730
90	2.760

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	99
1	110	106	102	98	107	103	100	97	99	96	93	93	95	93	90	91	89	86
2	101	94	87	82	98	92	86	81	88	83	79	79	85	81	77	82	78	74
3	93	84	76	70	91	82	75	70	79	73	68	68	76	71	67	74	69	64
4	86	75	67	61	84	74	66	61	71	65	60	60	69	63	59	67	62	56
5	80	68	60	54	78	67	59	53	65	58	53	53	63	57	52	61	56	51
6	74	62	54	48	72	61	53	47	59	52	47	47	57	51	46	56	50	44
7	69	57	48	43	67	56	48	43	54	47	42	42	53	47	42	51	46	40
8	65	52	44	39	63	51	44	39	50	43	38	38	49	43	38	48	42	36
9	61	48	40	35	59	47	40	35	46	40	35	35	45	39	35	44	39	33
10	57	45	37	32	56	44	37	32	43	37	32	32	42	36	32	41	36	30

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-OD1V-LED-8000L-DIM10-MVOLT-40K-85

TEST NO.: EL121828

INPUT WATTS: 70

LUMENS: 8439


CRI: 85

EFFICACY: 121

CCT: 4000K

SPACING CRITERIA: 1.16

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1494.09	N.A.	17.70
0-30	3075.75	N.A.	36.40
0-40	4727.44	N.A.	56.00
0-60	7137.96	N.A.	84.60
0-80	8239.99	N.A.	97.60
0-90	8373.34	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2413	3273	4840
55	2019	2470	3763
65	1851	2113	2806
75	1699	2014	2435
85	1050	1891	2786

Lumens Per Zone

Zone	Lumens
0-10	388.89
10-20	1105.2
20-30	1581.67
30-40	1651.69
40-50	1391.41
50-60	1019.1
60-70	690.43
70-80	411.60
80-90	133.35

Candela Tabulation

0	0
0	4111.157
5	4107.808
15	3839.447
25	3034.228
35	1978.869
45	1269.161
55	861.300
65	581.794
75	327.214
85	68.056
90	3.445

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
ROOM CAVITY RATIO	0	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	110	105	102	98	107	103	100	97	99	96	93	93	95	92	90	91	89	85
2	101	94	87	82	98	92	86	81	88	83	79	79	85	81	77	82	78	73
3	93	83	76	70	91	82	75	70	79	73	68	68	76	71	67	74	69	64
4	86	75	67	61	84	74	66	61	71	65	60	60	69	63	59	67	62	56
5	80	68	60	54	78	67	59	53	65	58	53	53	63	57	52	61	56	51
6	74	62	54	48	72	61	53	47	59	52	47	47	57	51	46	56	50	44
7	69	57	48	43	67	56	48	43	54	47	42	42	53	47	42	51	46	40
8	65	52	44	39	63	51	44	38	50	43	38	38	49	43	38	48	42	36
9	61	48	40	35	59	47	40	35	46	40	35	35	45	39	35	44	39	33
10	57	45	37	32	56	44	37	32	43	37	32	32	42	36	32	41	36	30

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-OD1V-LED-10000L-DIM10-MVOLT-40K-85

TEST NO.: EL121826

INPUT WATTS: 83

LUMENS: 10655


CRI: 85

EFFICACY: 128

CCT: 4000K

SPACING CRITERIA: 1.16

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1897.74	N.A.	17.80
0-30	3906.38	N.A.	36.70
0-40	5996.56	N.A.	56.30
0-60	9021.13	N.A.	84.70
0-80	10404.61	N.A.	97.60
0-90	10572.09	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3155	3892	5863
55	2636	2967	4455
65	2413	2571	3292
75	2231	2448	2849
85	1608	1971	2796

Lumens Per Zone

Zone	Lumens
0-10	493.77
10-20	1403.98
20-30	2008.63
30-40	2090.19
40-50	1749.96
50-60	1274.61
60-70	864.09
70-80	519.39
80-90	167.48

Candela Tabulation

0	0
0	5219.669
5	5230.175
15	4924.069
25	3945.538
35	2596.074
45	1659.680
55	1124.575
65	758.574
75	429.582
85	104.246
90	6.283

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	30%	10%	10%	30%	10%	0%
ROOM CAVITY RATIO	0	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	110	105	102	98	107	103	100	97	99	96	93	93	95	93	90	91	89	86
2	101	94	87	82	98	92	86	81	88	83	79	79	85	81	77	82	78	74
3	93	84	76	70	91	82	75	70	79	73	68	68	76	71	67	74	69	64
4	86	75	67	61	84	74	66	61	71	65	60	60	69	63	59	67	62	56
5	80	68	60	54	78	67	59	53	65	58	53	53	63	57	52	61	56	50
6	74	62	54	48	72	61	53	47	59	52	47	47	57	51	46	56	50	44
7	69	57	49	43	67	56	48	43	54	47	42	42	53	47	42	51	46	40
8	65	52	44	39	63	51	44	39	50	43	38	38	49	43	38	48	42	36
9	61	48	40	35	59	48	40	35	46	40	35	35	45	39	35	44	39	33
10	57	45	37	32	56	44	37	32	43	37	32	32	42	36	32	41	36	30

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated contol systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹	☐ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ^{1,4}	☐ CU-4E-FMH Fixture Mount Control Unit ^{1,5}	☐ ZL027 -NOW Intellect Power Control Module ^{1,6}	☐ EN-WCM2-ZB-DR Wireless Control Module ^{1,7}	☐ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ^{1,8}	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1,9}
	☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-ECO Lutron Vive Eco-system Individual Control Models ^{1,4}		☐ ZL027 -DLE Intellect Power Control Module ^{1,6}	☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1,7}		☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ^{1,9}
INTEGRATED OCCUPANCY& DAYLIGHT SENSOR	N/A	☐ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ² ☐ ZL00J-DOW Intellect Intelligent Fixture Control System ²	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	☐ SNS200 SNS200 for grouping ² ☐ SNS300 SNS300 for networks ²	☐ FD-301 Fixture integrated Daylight Dimming Sensor ² ☐ FS-205 Fixture integrated passive infrared occupancy sensor ² ☐ LMFS-601 DLM Integrated Fixture Sensor and Controller, Occupancy, Daylight Harvesting, and IPv6/Bluetooth® Low Energy Technology
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted ³	☐ LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-EO Light Level Sensor - Ceiling Mounted ³	☐ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ☐ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	☐ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	☐ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESSORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ☐ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.