




**EASY 3 COLORS
SELECTOR**
3500K • 4000K • 5000K

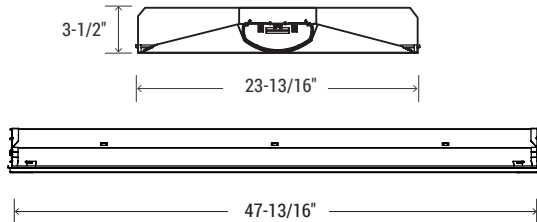

6000/7000/8000		
NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
8000	8108	62W
7000	7427	56W
6000	6273	46W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

3000/4000/5000		
NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
5000	5308	39W
4000	4293	29W
3000	3228	21W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

A combination of stylish design and shallow profile, coupled with innovative LED technology to deliver soft, glare-free illumination, resulting in improved visual comfort and uniform appearance. The enhancement of the volumetric effect provides increased brightness, with an aesthetically pleasing appearance and contemporary design. The energy saving features and optical performance create the ideal choice for educational, medical, office and retail spaces.

LUMENS	3000L/4000L/5000L 6000L/7000L/8000L
CCT & DYNAMIC PLATFORMS	35K/40K/50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output (Bodine BSL310) 20W - Up to 2000L output (Bodine BSL20)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The center acrylic diffuser can be removed, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 10% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.
Listed for DLC, California Title 24 compliant.

Example: **24-OEVHP-LED-3000L/4000L/5000L-DIM10-MVOLT-35K/40K/50K-85**

24	OEVHP	LED							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS
24 - 2' X 4'	OEVHP - LED Shallow Volumetric Troffer	LED	3000L/4000L/5000L 6000L/7000L/8000L	DIM10 - 0-10V Dimming	MVOLT	35K/40K/50K	85	O-EMG-LED-10W O-EMG-LED-20W	24FK - 2'x4' Flange Kit FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance FS-PPV2 - Fixture Sensor Power Pack FD-301 - Low Voltage Daylight Dimming Photosensor LMFC-011 - Digital Lighting Manager FS-205 - Low Voltage Pir Fixture Integrated Occupancy Sensor

*FD-301 & FS-205 require FS-PPV2- Power Pack

