
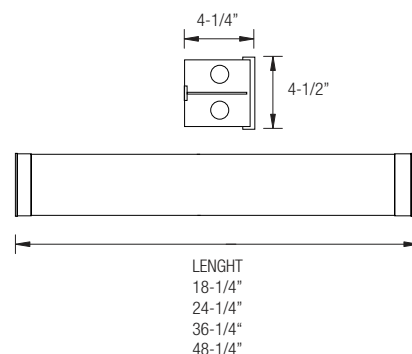


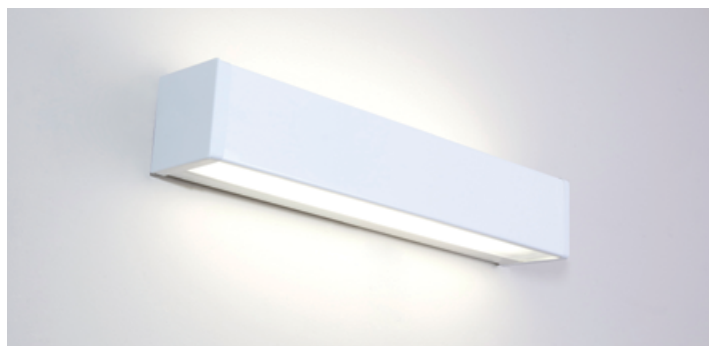

INTENDED USE:

- For use in residential, commercial and hospitality markets
- For wall or vanity application
- Fixture is designed for optional up/ down directional lighting
- Baffle front cover plate is also removable for 180° illumination

PRODUCT FEATURES:

- Comes standard with multi-volt ballast
- Available in prismatic acrylic lens and white end caps
- Individually boxed
- Diffuser easily removed via locking nut at both ends of fixture
- Post-painted body and hemmed edges allow for safe handling and installation
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

OPTIONAL FEATURES:

- Dividers for up/downlight
- Front baffle cover available for light block

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

Ordering Information > Example: 3-OW2B-2-21-T5-MVOLT-EMG-T5-T5HO-700

3	OW2B						
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE	# OF BALLAST	BALLAST FACTOR		
3 - 3'	OW2B-Oracle Fluorescent Wall/Ceiling Bracket	3' FIXTURE 2-21-T5 (2 lamps/21W/T5) 2-39-T5HO (2 lamps/39W/T5HO) 2-25-T8 (2 lamps/25W/T8)	(Blank) - MVOLT (120/277) 120 277 347	(Blank) - 1 Ballast 2- 2 Ballasts	(Blank) - Normal BF HBF- High BF LBF- Low BF		
EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)							
ORDER CODE		DESCRIPTION					
EMG-T8-BX-450		Up to 450 L. for T8 or BX					
EMG-T8-BX-600		Up to 600 L. for T8 or BX					
EMG-T8-BX-700		Up to 700 L. for T8 or BX					
EMG-T8-BX-1400		Up to 1400 L. for T8 or BX					
EMG-T5-T5HO-700		Up to 700 L. for T5 or T5HO					
EMG-T5-T5HO-1300		Up to 1300 L. for T5 or T5HO					
EMG-SD-T8-BX-T5-T5HO-1400		Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO					
EMG-ICE-T8-BX-T5-T5HO-1400		ICE Pack 1400 L. for T8, BX, T5 or T5HO					
GTD		Generator Transfer Device					
* 2' = For T8 only 450 L. available * 2' = For T5 no emergency option available							
WIRING OPTIONS							
FBF	- Internal Fast Blow Fuse						
SBF	- Internal Slow-Blow Fuse						
RIS	- Radio Interference Suppressor						
OTHER OPTIONS							
INMS	- Motion Sensor						
USA	- Made in America Compliance						

BALLAST CONFIGURATION & CODE

15W/T8	17W/T8	25W/T8	32W/T8	59W/T8	14W/T5	24W/T5HO	21W/T5	39W/T5HO	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	(Blank)	-	(Blank)	(Blank)	-	-	-	-	-	-	Electronic Instant Start
EPS	EPS	(Blank)	EPS	-	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	Electronic Program Start

Consult Factory for ADVANCE or LUTRON dimming ballast options.