
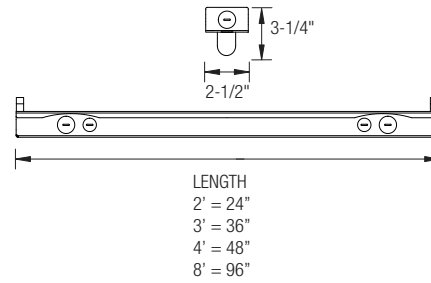


T8 FLUORESCENT STRIP NARROW BODY (1 LAMP)

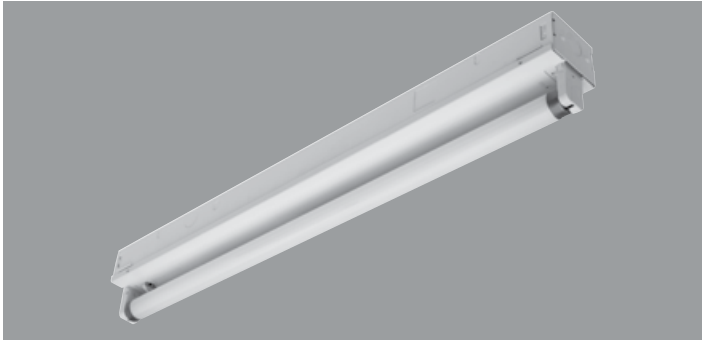

PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation
- Quarter-turn fastener secures ballast cover to housing
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

T8
OCN

Ordering Information > Example: 4-OCN-1-32-T8-MVOLT-EMG-T8-BX-700

4	OCN							
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR			
4- 4'	OCN- Oracle Channel Narrow Body Open Strip	4' FIXTURE 1-32-T8 (1 lamp/32W/T8)	(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF			

BALLAST CONFIGURATION & CODE

32W/T8	DESCRIPTION
(Blank)	Electronic Instant Start
EPS	Electronic Program Start
ADV-7	Advance Mark-7 ¹
ADV-10	Advance Mark-10 ¹
-	Advance Optanium ¹
ADV-ESS	Advance Essential ¹
ADV-ROVR	Advance Rover ¹
LUT-EHD	Lutron Ecosystem H-Series ¹
LUT-2W	Lutron Tu-Wire ¹
LUT-EC5	Lutron Ecosystem ¹
LUT-EC3	Lutron Eco-10 ¹
LUT-TVE	Lutron Tve ¹
LUT-H3D	Lutron Hi-Lume 3D ¹
-	Lutron Ecosystem (347V Only) ¹

¹ - Voltage must be specified for dimming ballast.

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-SD-T8-BX-T5-T5H0-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0
EMG-ICE-T8-BX-T5-T5H0-1400	ICE Pack 1400 L. for T8, BX, T5 or T5H0
GTD	Generator Transfer Device

WIRING OPTIONS

C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS

20CNWG	- 2' Wireguard
30CNWG	- 3' Wireguard
40CNWG	- 4' Wireguard
80CNWG	- (2) 4' Wireguards
OCNMS	- Motion Sensor
OCNVH	- V Hook and Chain Kit
OCNGSS	- Cable Gripper Suspension Kit
USA	- Made in America Compliance

4' Fluorescent Narrow Body Strip