
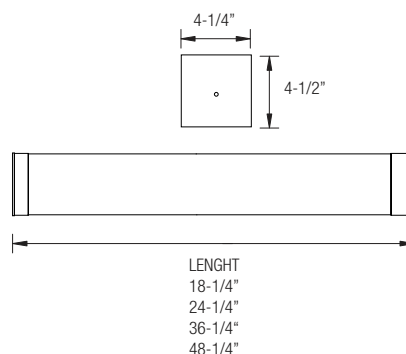


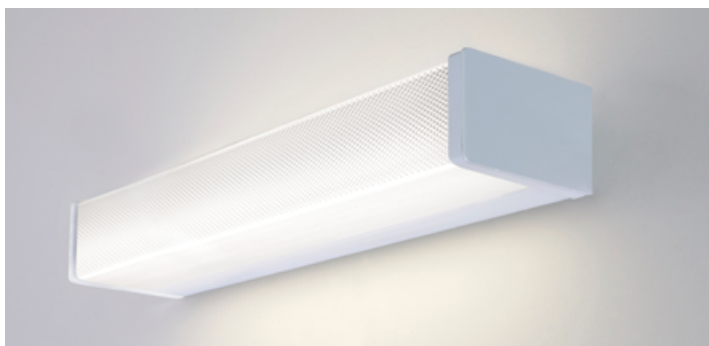

INTENDED USE:

- For use in residential, commercial and hospitality markets
- For wall or vanity application

PRODUCT FEATURES:

- Comes standard with multi-volt ballast
- Available in prismatic acrylic lens and white end caps
- Individually boxed
- Diffuser easily removed via locking nut at both ends of fixture
- Post-painted body and hemmed edges allow for safe handling and installation
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

T8/T5
OW1B

Fluorescent Wall/Ceiling Bracket Fixture

Ordering Information > Example: 4-OW1B-2-32-T8-MVOLT-EMG-T8-BX-700

4	OW1B																												
FIXTURE SIZE 4 - 4'	SERIES OW1B-Oracle Fluorescent Wall/Ceiling Bracket	WATTAGE 4' FIXTURE 2-28-T5 (2 lamps/28W/T5) 2-54-T5H0 (2 lamps/54W/T5H0) 2-32-T8 (2 lamps/32W/T8)	VOLTAGE (Blank) - MVOLT (120/277) 120 277 347	# OF BALLAST (Blank) - 1 Ballast 2 - 2 Ballasts	BALLAST FACTOR (Blank) - Normal BF																								
<table border="1"> <thead> <tr> <th colspan="2">EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)</th> </tr> <tr> <th>ORDER CODE</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>EMG-T8-BX-450</td> <td>Up to 450 L. for T8 or BX</td> </tr> <tr> <td>EMG-T8-BX-600</td> <td>Up to 600 L. for T8 or BX</td> </tr> <tr> <td>EMG-T8-BX-700</td> <td>Up to 700 L. for T8 or BX</td> </tr> <tr> <td>EMG-T8-BX-1400</td> <td>Up to 1400 L. for T8 or BX</td> </tr> <tr> <td>EMG-T5-T5H0-700</td> <td>Up to 700 L. for T5 or T5H0</td> </tr> <tr> <td>EMG-T5-T5H0-1300</td> <td>Up to 1300 L. for T5 or T5H0</td> </tr> <tr> <td>EMG-SD-T8-BX-T5-T5H0-1400</td> <td>Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0</td> </tr> <tr> <td>EMG-ICE-T8-BX-T5-T5H0-1400</td> <td>ICE Pack 1400 L. for T8, BX, T5 or T5H0</td> </tr> <tr> <td>GTD</td> <td>Generator Transfer Device</td> </tr> </tbody> </table>								EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)		ORDER CODE	DESCRIPTION	EMG-T8-BX-450	Up to 450 L. for T8 or BX	EMG-T8-BX-600	Up to 600 L. for T8 or BX	EMG-T8-BX-700	Up to 700 L. for T8 or BX	EMG-T8-BX-1400	Up to 1400 L. for T8 or BX	EMG-T5-T5H0-700	Up to 700 L. for T5 or T5H0	EMG-T5-T5H0-1300	Up to 1300 L. for T5 or T5H0	EMG-SD-T8-BX-T5-T5H0-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0	EMG-ICE-T8-BX-T5-T5H0-1400	ICE Pack 1400 L. for T8, BX, T5 or T5H0	GTD	Generator Transfer Device
EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)																													
ORDER CODE	DESCRIPTION																												
EMG-T8-BX-450	Up to 450 L. for T8 or BX																												
EMG-T8-BX-600	Up to 600 L. for T8 or BX																												
EMG-T8-BX-700	Up to 700 L. for T8 or BX																												
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX																												
EMG-T5-T5H0-700	Up to 700 L. for T5 or T5H0																												
EMG-T5-T5H0-1300	Up to 1300 L. for T5 or T5H0																												
EMG-SD-T8-BX-T5-T5H0-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0																												
EMG-ICE-T8-BX-T5-T5H0-1400	ICE Pack 1400 L. for T8, BX, T5 or T5H0																												
GTD	Generator Transfer Device																												
<table border="1"> <thead> <tr> <th colspan="2">WIRING OPTIONS</th> </tr> </thead> <tbody> <tr> <td>FBF</td> <td>- Internal Fast Blow Fuse</td> </tr> <tr> <td>SBF</td> <td>- Internal Slow-Blow Fuse</td> </tr> <tr> <td>RIS</td> <td>- Radio Interference Suppressor</td> </tr> </tbody> </table>						WIRING OPTIONS		FBF	- Internal Fast Blow Fuse	SBF	- Internal Slow-Blow Fuse	RIS	- Radio Interference Suppressor	<table border="1"> <thead> <tr> <th colspan="2">OTHER OPTIONS</th> </tr> </thead> <tbody> <tr> <td>INMS</td> <td>- Motion Sensor</td> </tr> <tr> <td>USA</td> <td>- Made in America Compliance</td> </tr> </tbody> </table>		OTHER OPTIONS		INMS	- Motion Sensor	USA	- Made in America Compliance								
WIRING OPTIONS																													
FBF	- Internal Fast Blow Fuse																												
SBF	- Internal Slow-Blow Fuse																												
RIS	- Radio Interference Suppressor																												
OTHER OPTIONS																													
INMS	- Motion Sensor																												
USA	- Made in America Compliance																												

BALLAST CONFIGURATION & CODE										DESCRIPTION
15W/T8	17W/T8	25W/T8	32W/T8	14W/T5	24W/T5H0	21W/T5	39W/T5H0	28W/T5	54W/T5H0	
(Blank)	(Blank)	-	(Blank)	-	-	-	-	-	-	Electronic Instant Start
EPS	EPS	(Blank)	EPS	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)	Electronic Program Start

Consult Factory for ADVANCE or LUTRON dimming ballast options.