
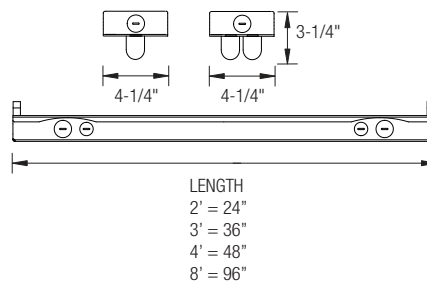


**T8 FLUORESCENT STRIP
(2 OR 4 LAMP)**

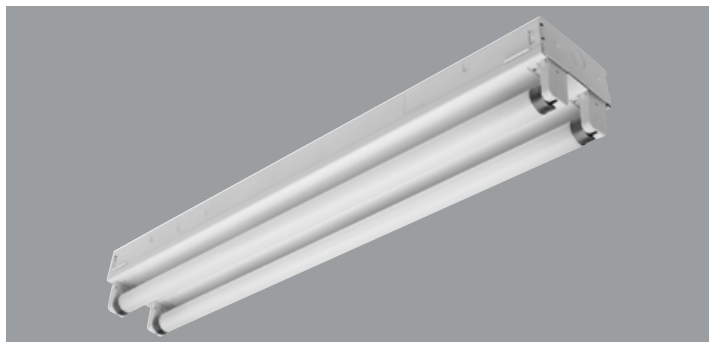

PRODUCT FEATURES:

- Heavy-duty 20-gauge steel for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted with a high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation
- Quarter-turn fastener secures ballast cover to housing
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standards

WARRANTY

Guaranteed for one year against mechanical defects

T8
OC

Ordering Information > Example: 8-OC-2-32-T8-MVOLT-EMG-T8-BX-700

8	OC							
----------	-----------	--	--	--	--	--	--	--

FIXTURE SIZE	SERIES	WATTAGE
8- 8'	OC-Oracle Channel Open Strip	8' FIXTURE 1-59-T8 (1 Lamp/59W/T8) 2-59-T8 (2 Lamps/59W/T8) 8' TANDEM FIXTURE 2-32-T8 (2 Lamps/32W/T8) 4-32-T8 (4-lamps/32W/T8)

VOLTAGE ²	# OF BALLAST	BALLAST FACTOR
(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF - High BF LBF - Low BF

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for T8 , BX , T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8 , BX , T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8 , BX , T5 or T5HO
GTD	Generator Transfer Device

BALLAST CONFIGURATION & CODE

32W/T8	59W/T8	DESCRIPTION
(Blank)	(Blank)	Electronic Instant Start
EPS	-	Electronic Program Start
ADV-7	-	Advance Mark-7 ²
ADV-10¹	-	Advance Mark-10 ²
-	-	Advance Optanium ²
ADV-ESS¹	-	Advance Essential ²
ADV-ROVR	-	Advance Rover ²
LUT-EHD¹	-	Lutron Ecosystem H-Series ²
LUT-2W¹	-	Lutron Tu-Wire ²
LUT-EC5¹	-	Lutron Ecosystem ²
LUT-EC3¹	-	Lutron Eco-10 ²
LUT-TVE¹	-	Lutron Tve ²
LUT-H3D¹	-	Lutron Hi-Lume 3D ²
-	-	Lutron Ecosystem (347V Only) ²

1- Requires 2 Ballasts for 4-lamps.

2- Voltage must be specified for dimming ballast.

WIRING OPTIONS

C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS

20CWG	- 2' Wireguard
30CWG	- 3' Wireguard
40CWG	- 4' Wireguard
80CWG	- 2X4' Wireguards
OCMS	- Motion Sensor
OCVH	- V Hook and Chain Kit
OCGSS	- Cable Gripper Suspension Kit
USA	- Made in America Compliance