

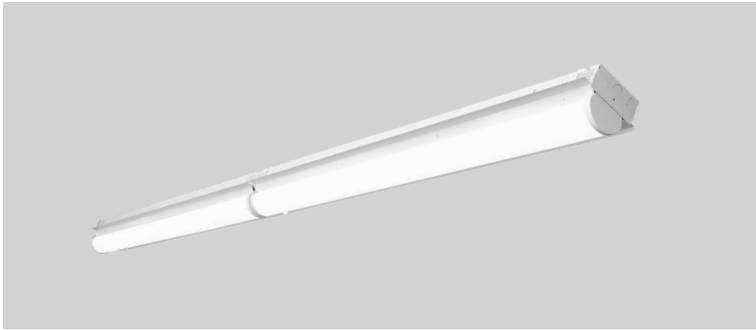





MULTI-LUMEN
SELECTOR

EASY 3 COLORS
SELECTOR
3500K • 4000K • 5000K

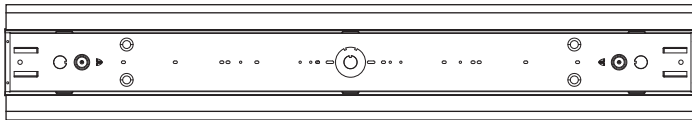

NOMINAL LUMENS	LUMEN	WATTAGE
6000L/8000L/10000L	10000	75W
	8000	60W
	6000	45W

FEATURES

Retrofits existing strip and industrial fixtures to LED in as little as one minute. Industry's fastest LED strip retrofit kit. The universal design fits most 4.25" and 5.25" T8/T12 fluorescent wide strips.

LUMENS	6000L/8000L/10000L
CCT	35K/40K/50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
LENGTH	8'
MOUNTING	Surface
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output
LIFETIME	L70 at 100,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS & PERFORMANCE

The optical system delivers high efficiency LED light that passes through a high quality, frosted acrylic lens for optimal performance, creating a glare-free and even distribution.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, painted with a high-gloss baked white enamel finish, with a frosted extruded lens that delivers highly efficient illumination.

SUPPORT CABLE/FEED

Standard suspension is conductive feed/suspension cable. The adjustable power cable comes in a standard 10' length. A 5-conductor cable is standard or a 6-conductor cable for emergency power. Field adjustable length. Max. support every 8 feet.

CRM INSTALLATION

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring. Each luminaire must be installed male to female.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 10% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.
Listed for DLC, California Title 24 compliant.

Example: **8-OC1-LED-RTK-6000L/8000L/10000L-DIM10-MVOLT-35K/40K/50K-85**

8	OC1	LED-RTK						
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	
8 -8'	OC1 - LED General Linear	RTK-LED	6000L/8000L/10000L	DIM10 - 0-10V Dimming	MVOLT 347* *Consult factory for details	35K/40K/50K	85	
						WIRING OPTIONS		
						FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor		
								OTHER OPTIONS
								WG - WireGuard