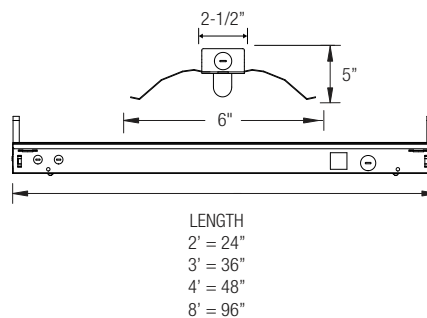
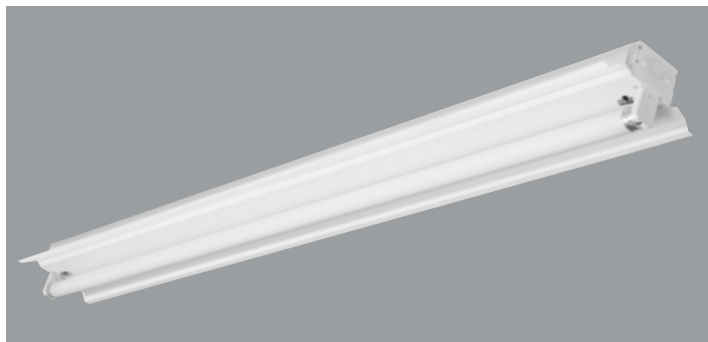


T8 FLUORESCENT INDUSTRIAL STRIP W/ REFLECTOR (1 OR 2 LAMP)



PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Powder-coated painted for maximum operating life
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface and/or suspended mounting
- Individual or continuous row mounting
- Standard reflector is manufactured in high reflectance white
- Reflector is secured to housing with 1/4 turn fasteners (ships separately)
- Reflector options:
 - Aluminium high reflectance white paint/slotted (20% uplight)
 - Aluminium specular silver/slotted (20% uplight)
 - Aluminium white asymmetrical reflector
 - Aluminium specular silver/asymmetrical reflector

- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

NOTE: All Aluminium Reflectors are special order (check with factory)

Ordering Information > Example: 8-OCNR-1-59-T8-MVOLT-EMG-T8-BX-700

8	OCNR								
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE ¹	# OF BALLAST	BALLAST FACTOR	REFLECTOR OPTIONS			
8'-8'	OCNR Oracle Industrial Series with Reflector	8' FIXTURE 1-59-T8 (1 lamp/59W/T8) 8' TANDEM FIXTURE 2-32-T8 (2 lamps/32W/T8)	(Blank) - MVOLT (120/277) 120 277 347	(Blank) - 1 Ballast 2- 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF	Refer to page 291			

BALLAST CONFIGURATION & CODE		
32W/T8	59W/T8	DESCRIPTION
(Blank)	(Blank)	Electronic Instant Start
EPS	-	Electronic Program Start
ADV-7	-	Advance Mark-7 ¹
ADV-10	-	Advance Mark-10 ¹
-	-	Advance Optanium ¹
ADV-ESS	-	Advance Essential ¹
ADV-ROVR	-	Advance Rover ¹
LUT-EHD	-	Lutron Ecosystem H-Series ¹
LUT-2W	-	Lutron Tu-Wire ¹
LUT-EC5	-	Lutron Ecosystem ¹
LUT-EC3	-	Lutron Eco-10 ¹
LUT-TVE	-	Lutron Tve ¹
LUT-H3D	-	Lutron Hi-Lume 3D ¹
-	-	Lutron Ecosystem (347V Only) ¹

¹ - Voltage must be specified for dimming ballast.

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for T8, BX, T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

WIRING OPTIONS












C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS

OCNRMS	- Motion Sensor
OCNRVH	- V Hook and Chain Kit
OCNRGSS	- Cable Gripper Suspension Kit
USA	- Made in America Compliance

ACCESSORIES SECTION

WHITE/ SILVER REFLECTOR GUIDE FOR OCR AND OCNR

REFLECTOR FOR OCR-2 LAMP	REFLECTOR FOR OCNR-1 LAMP
 SYMMETRICAL 2-OCR-2-SYM-(WH)(SR) 3-OCR-2-SYM-(WH)(SR) 4-OCR-2-SYM-(WH)(SR) 8-OCR-2-SYM-(WH)(SR)	 SYMMETRICAL 2-OCNR-1-SYM-(WH)(SR) 3-OCNR-1-SYM-(WH)(SR) 4-OCNR-1-SYM-(WH)(SR) 8-OCNR-1-SYM-(WH)(SR)
 ASYMMETRICAL 2-OCR-2-ASY-(WH)(SR) 3-OCR-2-ASY-(WH)(SR) 4-OCR-2-ASY-(WH)(SR) 8-OCR-2-ASY-(WH)(SR)	 ASYMMETRICAL 2-OCNR-1-ASY-(WH)(SR) 3-OCNR-1-ASY-(WH)(SR) 4-OCNR-1-ASY-(WH)(SR) 8-OCNR-1-ASY-(WH)(SR)
 INSIDE ASYMMETRICAL 2-OCR-2-IAS-(WH)(SR) 3-OCR-2-IAS-(WH)(SR) 4-OCR-2-IAS-(WH)(SR) 8-OCR-2-IAS-(WH)(SR)	 INSIDE ASYMMETRICAL 2-OCNR-1-IAS-(WH)(SR) 3-OCNR-1-IAS-(WH)(SR) 4-OCNR-1-IAS-(WH)(SR) 8-OCNR-1-IAS-(WH)(SR)
 ELLIPTICAL 2-OCR-2-ELR-(WH)(SR) 3-OCR-2-ELR-(WH)(SR) 4-OCR-2-ELR-(WH)(SR) 8-OCR-2-ELR-(WH)(SR)	 ELLIPTICAL 2-OCNR-1-ELR-(WH)(SR) 3-OCNR-1-ELR-(WH)(SR) 4-OCNR-1-ELR-(WH)(SR) 8-OCNR-1-ELR-(WH)(SR)
 DOWNLIGHT 2-OCR-2-DLRL-(WH)(SR) 3-OCR-2-DLRL-(WH)(SR) 4-OCR-2-DLRL-(WH)(SR) 8-OCR-2-DLRL-(WH)(SR)	 DOWNLIGHT 2-OCNR-1-DLRL-(WH)(SR) 3-OCNR-1-DLRL-(WH)(SR) 4-OCNR-1-DLRL-(WH)(SR) 8-OCNR-1-DLRL-(WH)(SR)
 UPLIGHT SYMMETRICAL 2-OCR-2-SYM-UPL-(WH)(SR) 3-OCR-2-SYM-UPL-(WH)(SR) 4-OCR-2-SYM-UPL-(WH)(SR) 8-OCR-2-SYM-UPL-(WH)(SR)	 UPLIGHT SYMMETRICAL 2-OCNR-1-SYM-UPL-(WH)(SR) 3-OCNR-1-SYM-UPL-(WH)(SR) 4-OCNR-1-SYM-UPL-(WH)(SR) 8-OCNR-1-SYM-UPL-(WH)(SR)

REFLECTOR FINISH

Reflectors are manufactured in aluminium high reflectance specular silver & white finishes. Custom colors or finishes are available upon request.

- WH (High Efficiency White Reflector)
- SR (High Efficiency Silver Reflector)

REFLECTOR MOUNTING

Reflectors mount onto existing ballast covers.