


8" VERTICAL FLUORESCENT SERIES HOUSING

BHVR8PL

8" VERTICAL FLUORESCENT HOUSING

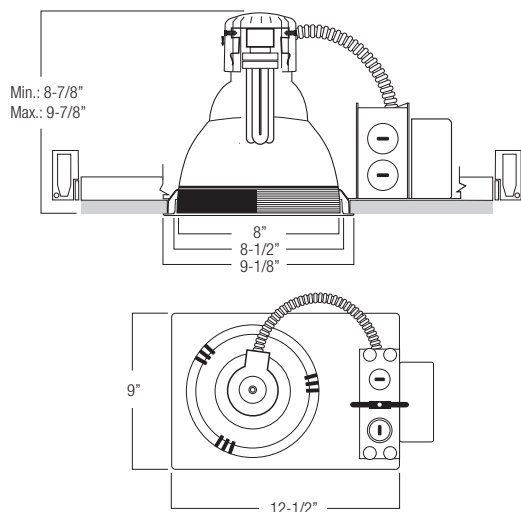

DESCRIPTION:

- 1. LAMP HOLDER** - Die-cast aluminum lamp holder effectively provides heat dissipation and ventilation. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjustability from either outside the housing or inside the housing.
 - 2. MOUNTING BRACKET** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They are designed to be hammered directly without using nails or screws and could be fit onto T-Bar spline for easy installation and quick alignment.
 - 3. RETAINING SPRINGS** - Precision tooled springs secure trim to mounting frame, for effortless and tool-less installation.
 - 4. JUNCTION BOX/BALLAST** - UL listed for through-branch circuit wiring and has four 1/2" KO's, one 3/4" KO and four Romex knockouts with pry-out slots and strain clamps. Ballast and Junction Box are accessible from below, no tools required. Ballast supplied is manufactured by Philips Advance Transformer CO, Universal Technologies or Lutron Electronics.
 - 5. MOUNTING FRAME** - Die-formed construction for maximum heat dissipation and rust protection.
- #### OPTICS:
- 6. REFLECTOR** - .050" aluminum reflector with low iridescent anodized finish. Reflector provides 45-degree lamp-to-reflector image cutoff.
 - 7. GROOVE BAFFLE** - Self-flanged one-piece aluminum with concentric rings.
 - 8. LENS** - Choice of either tempered clear, tempered fresnel, tempered prismatic or tempered frosted lens fastened with two torsion springs for easy re-lamping. UL listed for wet or damp location.



LAMP BASE GUIDE (Sockets will accept all designated lamp bases listed.)				
13W	18W	26W	32W	42W
G24q-1 GX24q-1	G24q-2 GX24q-2	G24q-3 GX24q-3 GX24q-4	GX24q-3 GX24q-4	GX24q-4

ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING	WATTAGE	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE & DESCRIPTION	REFLECTOR	BAFFLE	GLASS
☐ BHVR8PL	☐ 1X13 ☐ 1X18 ☐ 1X26 ☐ 1X32 ☐ 1X42 BALLAST ☐ (E) Electronic ¹ ☐ (S) Energy Star ² DIMMING ☐ Mark 7 ³ ☐ Mark 10 ⁴ ☐ Lut-E (EC3D) ⁵	☐ MVOLT (120/277) ☐ 120 ☐ 277 ☐ 347	☐ EMG 750 (750 lm) ⁶ ☐ EMG 1300 (1300 lm) ⁶ ☐ INTG 750 (750 lm) ⁷ ☐ INTG 1300 (1300 lm) ⁷ ☐ ICE-1300 (1300 lm) ¹⁰ ☐ EMG-SD-1300 (1300 lm) ¹⁴ OTHER OPTIONS ☐ FUSE ¹¹ ☐ RIF ¹²	☐ 8101 Reflector ☐ 8102 Baffle/Reflector ☐ 8103 Ref./Fres. Gls. Lns. ☐ 8104 Ref./Pris. Gls. Lns. ☐ 8105 Baf./Fres. Gls. Lns. ☐ 8106 Baf./Pris. Gls. Lns. ☐ 8107 Wall Wash Ref. ☐ 8108 Crossblade Ref. ☐ 8112 Baf./Frost Gls. Lns. ☐ 8113 Baf./Tem. Cir. Gls. ☐ 8114 Ref./Frost Gls. Lns. ☐ 8115 Ref./Tem. Cir. Gls. ☐ 8116 Ref./Pris. Plas. Lns.	☐ 8117 Baf./Pris. Plas. Lns. ☐ 8118 Ref./Tem. Cir. Plas. ☐ 8119 Baf./Tem. Cir. Plas. ☐ 8109 Deco Glass Ring ☐ 8110 Double Ring ☐ 8111 Triple Ring ☐ 8121 Startdust Deco Ring Gls. ☐ 8122 Euro Deco Ring Gls. ☐ 8123 Prism Deco Ring Gls. ☐ 8124 Geo Deco Ring Gls. ☐ 8125 Central Etched Float Gls. ☐ 8126 Diff. Screen Wall Wash ☐ 8127 Geo Deco Ring Gls.	☐ CL-WH ☐ CL-SCH ☐ SHZ-SHZ ☐ SHZ-WH ☐ WT-WH ☐ W-WH ☐ MB-WH REFLECTOR CL Clear SHZ Satin Haze (Low Irrescent) WT Wheat MB Black W White BAFFLE WH White P Black R Ring WH Self-Flange White SCH Self-Flange Chrome SHZ Satin Haze	☐ Blue ☐ Green ☐ Red ☐ Frost GLASS Only available on XX09, XX10 and XX11 series.

¹ - Electronic = Not available on 9W only • ² - (S) Energy Star = Available on selected fixtures only, please see list above • ³ - MARK 7 = Must specify voltage, not compatible with Emergency Options • ⁴ - MARK 10 = Not available on 9W, 13W, 57W, 70W, must specify voltage, not compatible with Emergency Options • ⁵ - LUT-E (EC3D) = Not available on 9W, 13W, 57W, 70W, must specify voltage • ⁶ - EMG = Emergency battery pack w/ remote test switch • ⁷ - INTG = Emergency battery pack w/ integral (reflector) test switch • ⁸ - EMG-D = Emergency battery pack w/ remote test switch for damp location • ⁹ - INTG-D = Emergency battery pack w/ integral(reflector) test switch for damp location • ¹⁰ - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • ¹¹ - FUSE = Single slow-blow fuse • ¹² - RIF = Radio interference filter • ¹³ - Magnetic = Available on 9W, 13W, 18W & 26W fixtures only • ¹⁴ - SD = Emergency battery pack w/ Self-Diagnostic

Specifications:

HOUSING	WATT	BALLAST	VOLTAGE	EMERGENCY	OPTIONS	TRIM TYPE	REFLECTOR	BAFFLE	GLASS
---------	------	---------	---------	-----------	---------	-----------	-----------	--------	-------

Sample of Catalog Number: BHVR8PL-1X32-E-MVOLT-EMG750-8101-CL-WH