

ELM-LED-810

Wet location Semi-recessed MR-16 Emergency Light

Architectural



Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

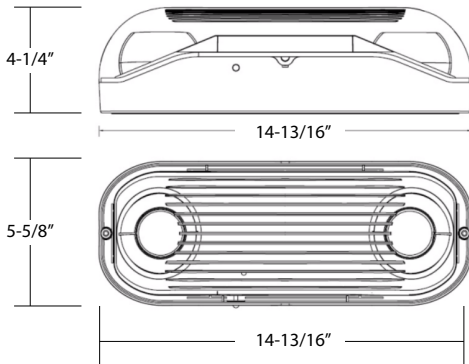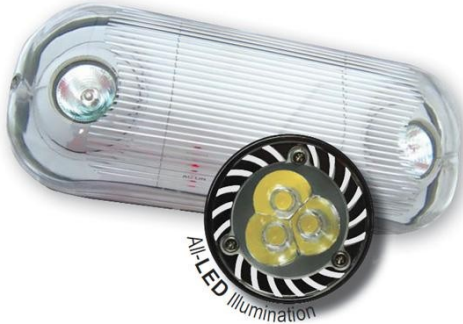

FOR
WET
LOCATION

UL
c US
LISTED

FEATURES

This fixture is an excellent choice when an attractive emergency light is required. In cases of AC power loss, it provides a minimum of 90 minutes illumination. A trouble-free lead-calcium battery is provided with the fixture. The lamp heads may be adjusted through the full range of motion because of the special swivel-track design.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Compartment shaped by injection.
- Power may be supplied via wall mount.

FACE

- Beveled injection molded face with two round lamp heads molded into sloped side surfaces of fixture. Each head holds a 3.3 watt covered MR16 lamp.

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided electrical

ELECTRICAL

- 120V or 277V input
- Reset is automatic
- Hassle-free wiring without the need for additional hardware

LAMPS

- LED: 3.3W high performance MR-16 base LED lamps.

BATTERY

- Indicator light shows high charge and readiness for operation
- 6V, 4 amp-hour sealed-lead acid battery works during power failures
- Replaceable and requires no maintenance
- When completely charged, supplies emergency power for 90 minutes.

TESTING

- Test Button
- Solid state line latched low voltage disconnect to avoid deep discharge
- Safeguarded against short circuits
- Power is automatically interrupted in cases of brown-out

LISTED

- UL listed for Wet location (20°C-40°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

WARRANTY

- 5 years warranty on all electronics and housing. Battery prorated for two years.



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011