

NEW

ILLUMINATION

- Long-life, efficient ultra-bright white LED lamp heads.
- Two fixed or adjustable 0.6W, 230Lm/head LED lamp provide optimal center-to-center spacing.
- LED expected life is more than 10 years.

ELECTRICAL

- Universal 120V or 277V dual Input
- Unique bi-color LED indicator light alerts on battery condition (green-normal, red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Maintenance-free, NiCad batteries provide 90 minutes of emergency power.
- Emergency unit provided with test switch, status indicator and rechargeable battery.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING


- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Suitable for wall and ceiling mount.

HOUSING

- Injection-molded, high-impact resistant, UL 924 V-0 Thermoplastic in white and black finish.

WARRANTY

- One year warranty on all electronics and housing. Battery pro-rated for five years.
- Damp location listed.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

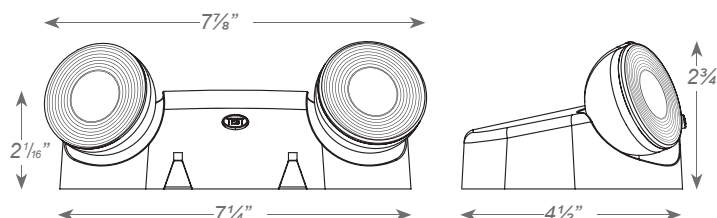

ELM-832

SINGLE HEAD DAMP LOCATION
6V 5W REMOTE HEAD

ELM-843

SINGLE HEAD DAMP LOCATION
6V 9W REMOTE HEAD

ELM-844

SINGLE HEAD DAMP LOCATION
12V 7.2W REMOTE HEAD



ELM-835

DOUBLE HEAD DAMP LOCATION
6V 5W / REMOTE HEAD

ITEM SELECTOR: (Please check the boxes below for the option desired)

CATALOG#	HOUSING COLOR	OPTIONS
ELM-LED-862	☐ W - White	☐ RC - Remote Capable
	☒ B - Black	☐ SPV - 120V/230V 50/60Hz

SPECIFIED:

ELM-LED-862

HOUSING COLOR

OPTIONS

