




FEATURES

- Injection-molded thermoplastic ABS housing.
- Fully adjustable glare-free emergency light heads.
- 5" diameter canopy matching round mounting plate for 3" or 4" box standard.
- DC 3.6~12V input.
- SMD 1W per head

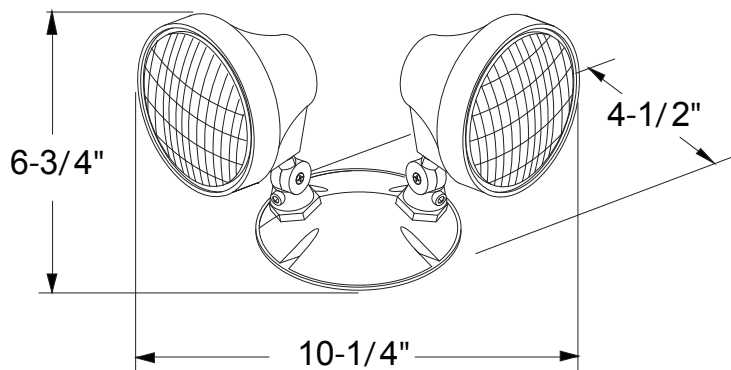

ITEM SELECTOR: (Please check the boxes below for the option desired)

CATALOG#	FINISH
ELM-LED-863-OT	☐ W - White ☐ G - Gray ☐ B - Black

SPECIFIED:

ELM-LED-863-OT

FINISH