

FEATURES

This LED series of exit sign is resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water. It takes advantage of a self-generated source of power in emergencies. The long-life LEDs in the fixture consume very low levels of energy – less than 2 Watts – and are rated for a life of up to 25 years.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and-impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Replaceable chevron directional indicator knockouts for control of direction.
- Compartment shaped by injection and has 1/2" knockouts for the supply of power.

FACE

- 6" high text with color diffusion
- Knockout directional chevrons

MOUNTING

- For side/wall mount or ceiling mount only, not for back mount

ELECTRICAL

- Universal 120V or 277V dual Input
- Only 2 Watts of power used
- LED light source
- Protected against short circuits and power surges

LISTED

- UL listed for 10°C - 40°C
- Wet location

AVAILABLE OPERATIONS:

- **AC Input** model offers a single circuit to be powered with main power source or back up source such as generator.

- **Dual Circuit** models have one source circuit to be powered with normal power source and a second circuit is to be powered by a generator or alternate source.

- **Emergency Battery Back-Up** provides a minimum of 90 minutes illumination when AC power is lost.

- Ni-cad battery
- Minimum 90 minutes of illumination
- Internal solid-state wiring for charging power
- Indicator light will reflect high charge and readiness for operation


- Test button
- **ITEM SELECTOR:** (Please check the boxes below for the option desired)

- Short-circuit safeguard
- Brown-out safeguard
- Disconnect for full discharge


- **Internal Heater** for cold temperature applications lets the fixture work at the temperatures down to -10°C / 15°F



FOR
WET
LOCATION

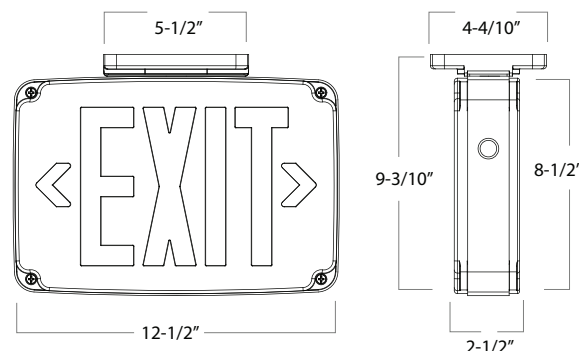

WALL MOUNTED

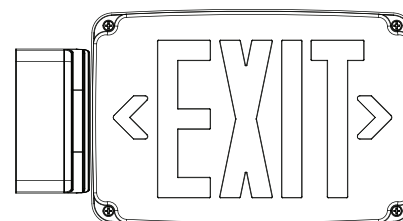

*Only one circuit shall be energized at a time.

CATALOG#	LETTER COLOR	NO. OF FACE	HOUSING COLOR	OPTION
☐ ELX-LED-651 SIGN	☐ G - Green	☐ 1 - (1) FACE	☐ W (WHITE)	☐ 2C (DUAL CIRCUIT)
WET LOCATION LED EXIT SIGN	☐ R - Red	☐ 2 - (2) FACE	☐ B (BLACK)	☐ EM (BATTERY BACK UP)
			☐ GR (GRAY)	☐ SDT (SELF DIAGNOSTIC TEST)
				☐ HTR (INTERNAL HEATER)



SPECIFIED:

ELX-

CATALOG NO.

LETTER COLOR

NO. OF FACE

HOUSING COLOR

OPTION