


LD6-AT

6" New Construction NON-IC Housing for use with Triac and 0-10V Dimmable RL600 series LED Module lighting components

SAME DAY
SHIPPING AVAILABLE



TO BE USED WITH 0-10V DIMMING LED MODULE LIGHTING COMPONENT

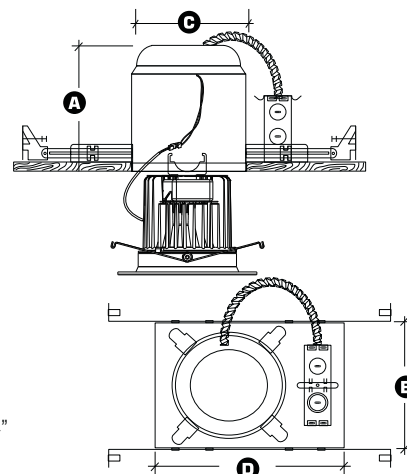

- A** Height = 7-1/4"
- B** Width = 7"
- C** Cut-out = 6-3/4"
- D** Length = 10"

DESCRIPTION - 6" Non-IC housing for use with RL600 LED series LED Module trims. Designed for new construction installations and suitable for use in NON-Insulation covered ceilings. The LD6-AT housing is engineered with a unique 'EZ-connect' wiring system, that when used with the RL600 trim, with California Title-24 (compliances pending). The unique EZ-connect system also meets other state and national regulatory mandates. LED Module connects effortlessly to housing, virtually eliminating mis-wiring and potential shock hazards.

NOTE - Complete system includes LD6-AT housing and LED Modules RL600 series trim. RL600 LED Modules trim must be ordered separately.

HOUSING - Die-formed aluminum and galvanized steel for maximum heat dissipation and rust protection. Housing adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" thick ceiling. Housing is Non-IC rated and insulation must be kept 3" away from all sides. May be installed in 2" x 8" joist construction.

CONNECTION - Polarity-specific EZ-connect system engineered to match with Elite LED Module trims. Meets strict code requirements where Edison Base Sockets have been banned. Additional wires are included for 0-10V dimming modules.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - UL Listed for through-branch circuit wiring, provided with four 1/2" knockouts, one 3/4" knockout and four Romex knockouts with true pry-out slots and strain clamps. Designed for straight through conduit runs.

THERMAL PROTECTION - Standard thermal protection device guards against improper installation and misuse of insulation material.

ELITE LED MODULE SOLD SEPARATELY - LD6-AT unique 'EZ-connect' wiring system is Title 24 compliant when used with the RL600 series module. RL600 series modules are rated to last up to 50,000hrs as tested in accordance with LM-80 standards. Driver and LED Engine are found on the module itself. The Elite **LED Module** system is fully dimmable down to 10% of initial light output with a 0-10 Volt dimmer when ordered with the following options (DIM10-MVOLT). Triac dimming driver also available when ordered with the following options (DIMTR-120). Consult Factory for details.

LISTING

c-UL-us - listed for Damp location
c-UL-us - listed for feed Through Wiring
LM79/LM80
Covered by U.S. Patent Number: 7717390B1

DIMMING INFORMATION

DIM10 (0-10V Dimming)
DIMTR (Triac Dimming)



Example: LD6-AT-RL630-650L-DIMTR-120

HOUSING TYPE					
☐ LD6-AT-DIMTR-120 - Used For Triac Dimming Module					
☐ LD6-AT-277 - Used For Non Dimming Module					
TRIM TYPE	750L/900L/1200L SERIES	PAGE #	TRIM TYPE	650L/900L SERIES	PAGE #
☐ RL630 (Baffle)	☐ 750L-DIMTR-120 ☐ 750L-277 (Non Dimmable) ☐ 900L-DIMTR-120 ☐ 900L-277 (Non Dimmable) ☐ 1200L-DIMTR-120 ☐ 1200L-277 (Non Dimmable)	287	☐ RL660 (Baffle)	☐ 650L-DIMTR-120 ☐ 900L-DIMTR-120	309
☐ RL611 (Baffle Wall Wash)			☐ RL661 (Reflector)		
☐ RL607 (Reflector)	☐ 750L-DIMTR-120 ☐ 750L-277 (Non Dimmable) ☐ 900L-DIMTR-120 ☐ 900L-277 (Non Dimmable) ☐ 1200L-DIMTR-120 ☐ 1200L-277 (Non Dimmable)	287	TRIM TYPE	750L SERIES	PAGE #
☐ RL622 (Reflector Wall Wash)			☐ RL625 (Baffle)	☐ 750L-DIMTR-120	307
TRIM TYPE	1000L SERIES	PAGE #	☐ RL663 (Adj. Baffle)		285
☐ RL670	☐ 1000L-DIMTR-120	300	TRIM TYPE	950L SERIES	PAGE #
			☐ RL628	☐ 950L-DIMTR-120	299

Example: LD6-AT-DIM10-MVOLT

HOUSING TYPE		
☐ LD6-AT-DIM10-120 Used For 0-10V Dimming Module. 120V input		
☐ LD6-AT-DIM10-277 Used For 0-10V Dimming Module. 277V input		
TRIM TYPE	900L/1200L SERIES	PAGE #
☐ RL630 (Baffle)	☐ 900L-DIM10-MVOLT ☐ 1200L-DIM10-MVOLT	287
☐ RL611 (Baffle Wall Wash)		
☐ RL607 (Reflector)		
☐ RL622 (Reflector Wall Wash)		