


LD600IC-AT

6" New Construction IC Housing for use with Triac and 0-10V Dimmable series LED Module lighting components



TO BE USED WITH LED MODULE LIGHTING COMPONENT ONLY

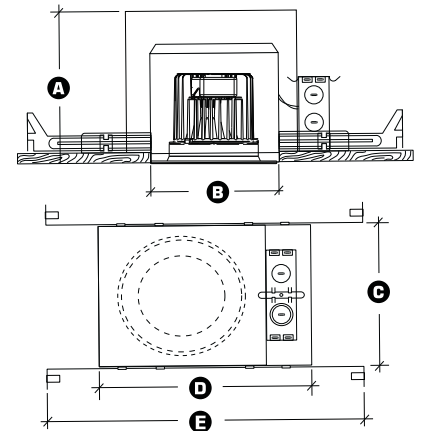

- A** Height = 7-1/2"
- B** Cut-out = 6-3/4"
- C** Width = 7-1/2"
- D** Length = 12-1/4"
- E** Bar Hanger = 12"-25"

DESCRIPTION - 6" IC housing for use RL600 LED series LED Module trims. Designed for new construction installations and suitable for use in insulation covered or non-insulation covered ceilings. The LD600IC-AT-DIMTR housing is engineered with a unique 'EZ-connect' wiring system, that when used with the RL600, with California Title-24 (compliances pending). The unique EZ-connect system also meets other state and national regulatory mandates. LED Module connects effortlessly to housing, virtually eliminating mis-wiring and potential shock hazards.

NOTE - Complete system includes LD600IC-AT housing and LED Modules RL660/ RL661 series trim. RL600 LED Modules trim must be ordered separately.

HOUSING - Die-formed aluminum and galvanized steel for maximum heat dissipation and rust protection. Housing adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" thick ceiling. Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications. May be installed in 2" x 8" joist construction.

CONNECTION - Polarity-specific EZ-connect system engineered to match with Elite LED Module trims. Meets strict code requirements where Edison Base Sockets have been banned.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - UL Listed for through-branch circuit wiring, provided with four 1/2" knockouts, one 3/4" knockout and four Romex knockouts with true pry-out slots and strain clamps. Designed for straight through conduit runs.

THERMAL PROTECTION - Standard thermal protection device guards against improper installation and misuse of insulation material.

ELITE LED MODULE SOLD SEPARATELY - LED Modules unique 'EZ-connect' wiring system is Title 24 compliant when used with the LD600IC-AT-DIMTR housing. The unique EZ-connect system also meets other state and national regulatory mandates. System is a UL Listed disconnect system that preserves the integrity of the energy-efficient system by insuring only Elite brand trims are used. The EZ-connect system prevents installation of less efficient incandescent luminaires and LEDs.

LISTING

c-UL-us - listed for Damp location
c-UL-us - listed for feed Through Wiring
c-UL-us - listed for Direct Contact with Insulation
LM79/LM80
Covered by U.S. Patent Number: 7717390B1



Example: LD600IC-AT-DIMTR-120

Example: LD600IC-AT-DIM10-MVOLT

HOUSING TYPE					
☐ LD600IC-AT-DIMTR-120 - Used For Triac Dimming Module					
☐ LD600IC-AT-277 - Used For Non Dimming Module					
TRIM TYPE	750L/900L/1200L SERIES	PAGE #	TRIM TYPE	650L/900L SERIES	PAGE #
☐ RL630 (Baffle)	☐ 750L-DIMTR-120 ☐ 750L-277 (Non Dimmable) ☐ 900L-DIMTR-120	190	☐ RL660 (Baffle)	☐ 650L-DIMTR-120 ☐ 900L-DIMTR-120	208
☐ RL607 (Reflector)	☐ 900L-277 (Non Dimmable) ☐ 1200L-DIMTR-120 ☐ 1200L-277 (Non Dimmable)		☐ RL661 (Reflector)		

HOUSING TYPE		
☐ LD600IC-AT-DIM10-120 - Used For 0-10V Dimming Module. 120V input		
☐ LD600IC-AT-DIM10-277 - Used For 0-10V Dimming Module. 277V input		
TRIM TYPE	900L/1200L SERIES	PAGE #
☐ RL630 (Baffle)	☐ 900L-DIM10-MVOLT ☐ 1200L-DIM10-MVOLT	190
☐ RL607 (Reflector)		