



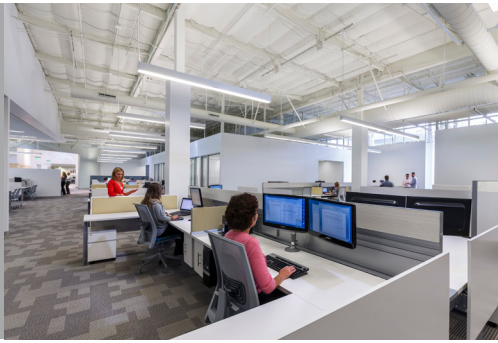

CUSTOM
COLORS

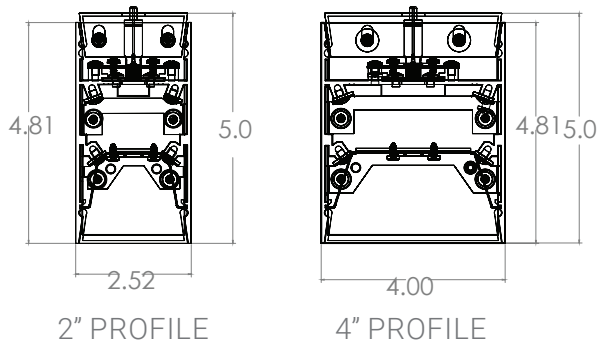

DIRECT

LUMENS/FT	WATTS/FT	LUMENS/FT	WATTS/FT
1500	12.7	1500	12.7
1250	10.5	1250	10.5
1000	9.5	1000	9.5
750	6.5	750	6.5
500	4.5	500	4.5

INDIRECT


FEATURES

FLEX Architectural LED Suspended Linear is "Performance Designed for You", combining the ultimate in flexibility and creativity, with continuous, uniform and glare-free illumination. Available in any combination of direct, indirect, and wall wash, with continuous mounting and fully illuminated corners for a seamless connection from luminaire to luminaire, in a variety of formed angles and shapes. Be inspired to create a long-lasting impression with a unique design that complements corporate offices, educational, commercial, and retail spaces.


LUMENS PER FOOT	500, 750, 1000, 1250, 1500 or Custom
CCT & DYNAMIC PLATFORMS	27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+ Standard, 90+
COLOR QUALITY	3 Step MacAdam Ellipses
WIDTHS	2", 4"
LENGTHS	2', 4', 6', 8', Continuous with 1" Increments
DISTRIBUTION PATTERNS	Direct: Standard, Wall Wash Indirect: Standard, Wall Wash, Batwing
CONFIGURATION PATTERNS & LENGTHS	Single (4', 8'), Continuous with 1' increments, Square, Rectangular, L-Shape, Custom with 90, 60, or 45° Angles
MOUNTING	Suspended
FINISH	WH (White), BK (Black), SI (Silver), Custom RAL
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELDO10.1, ELDO10.1, DALI.1
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21




Distribution Pattern:
Direct: Standard
Indirect: Batwing




Distribution Pattern:
Direct: Wall Wash



Distribution Pattern:
Direct: Standard
Indirect: Wall Wash



Distribution Pattern:
Direct: Standard
Indirect: Standard



OPTICS & PERFORMANCE

Fabricated from 20-gauge aluminum, with mitered corners, and post-painted with 95% reflective premium paint. The optical system delivers high efficiency LED light that passes through a high quality acrylic lens for optimal distribution patterns, creating a glare-free and even distribution. Distributions include Direct (Downlight), Indirect (Uplight) Wall Wash, and Batwing, with zero light leakage.

CONSTRUCTION

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

For indirect distribution, the lens can be installed flush against the luminaire, or extended off the surface of the luminaire, creating a soft glow of illumination.

OPTICAL ASSEMBLY

Reflector is fabricated from 20-gauge aluminum, and post-painted finish with 95% reflective premium paint. Wall Wash reflectors are positioned at an angle.

DISTRIBUTION PATTERNS & DIFFUSER

Standard Distribution: A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

Wall Wash Distribution: Illuminates from the ceiling, down, for uniform vertical illumination.

Batwing Distribution: Illuminates with a wide spread distribution for more energy efficiency and increased ceiling uniformity.

SUPPORT CABLE/FEED

Standard suspension is conductive feed/suspension cable. The adjustable power cable comes in a standard 4' length. A 5-conductor cable is standard for delivering independent, uplight, downlight, or combined up/downlight. A 6-conductor cable for emergency power. Field adjustable length. Max. Support every 8 feet.

LUMINAIRE CONTROL

Luminaire can be pre-wired for independent 2-circuit control of uplight, downlight, or 1-circuit control for combined up/downlight.

CRM INSTALLATION

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets. This allows the luminaires to be continuously connected by only removing the lenses. There is no need to remove any other parts in the fixture to install the continuous run.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and Female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring. Each luminaire must be installed male to female.

LED DYNAMIC PLATFORM OPTIONS



Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3500K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)





LISTINGS

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory. Listed for DLC, California Title 24 compliant.

UL Listed for Damp location.

Example: **OLS-DI-LED-2-REC-W8-L6-D500L-U500L-DIM10-MVOLT-35K-85**

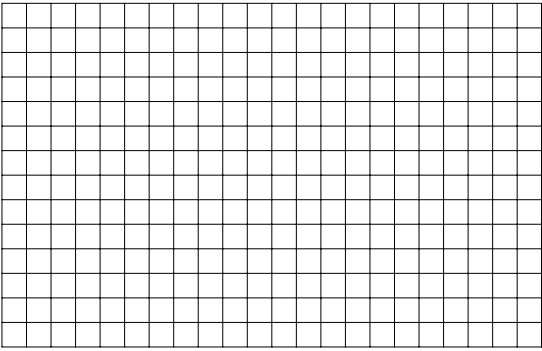OLS-DI-LED	Single Run	2, 4, 6 OR 8"	DIRECT LUMENS	DISTRIBUTION	INDIRECT LUMENS	DISTRIBUTION	DIMMING	VOLTAGE	CRI
SERIES OLS-DI-LED-Oracle Suspended Direct/Indirect LED Linear	WIDTH 2 - 2" 4 - 4"		D500L - per ft. D750L - per ft. D1000L - per ft. D1250L - per ft. D1500L - per ft.	(blank) - Standard WW - Wall Wash	U500L - per ft. U750L - per ft. U1000L - per ft. U1250L - per ft. U1500L - per ft.	(blank) - Standard WW - Wall Wash BW - Bat Wing	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLum LUT2W - Lutron 2-Wire ELD010.1 - EidoLED 0-10V DALI.1 - EidoLED DALI Type 8 ELD00DMX.1 - EidoLED DMX	120 277 MVOLT 347* * Consult factory for details	85 90 FINISH WH - White SI - Silver BK - Black RAL - Consult factory
SHAPE S - Single Unit CR - Continuous Run REC - Rectangle CUS - Custom (Consult Factory)	Cont. Run	XX . YY*	*XX is Length in Feet YY is Fraction in Inches e.g. 22.6 is 22 feet and 6 inches		NUMBER OF CIRCUITS 1C (Up and Down Lights Controlled Together) 2C (Up and Down Lights Controlled Individual)		CCT 30K 35K 40K 50K		EMERGENCY O-EMG-LED-10W O-EMG-LED-20W O-EMG-LED-G2-10W-SDT*
		TOTAL RUN			DRAW YOUR CUSTOM SHAPE HERE				OTHER OPTIONS FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interf. Sensor USA - Made in America Compliance OC6SS - Aircraft Cable
	Rectangle	W L							
	Custom								

- LUT2W available in 120V
- ELD010, ELD0DMX, LUTH available 120-277
- * Consult Factory

OLS-DI-LED-2-S-4-D1000L-U1000L-DIM10-MVOLT-40K-85

INPUT WATTS: **76**

LUMENS: **8326**


CRI: **85**

EFFICACY: **110**

CCT: **4000K**

TEST NO.: **EL081815**

Candle Power Distribution (Candelas)

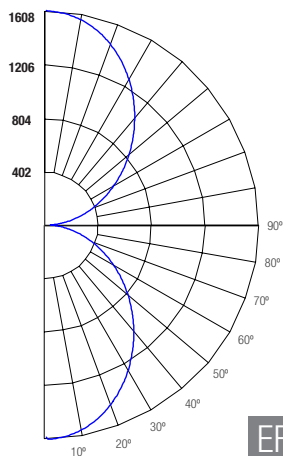

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1199.64	N.A.	14.40
0-40°	1924.15	N.A.	23.10
0-60°	3288.36	N.A.	39.50
0-90°	4163.18	N.A.	50.00
0-180°	8326.37	N.A.	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	19753	20906	22163
45°	18172	19416	20850
55°	16650	17872	19306
65°	15376	16393	17640
75°	15109	15772	16893

Candela Tabulation

	0	45	90	180
0	1587.911	1587.911	1587.911	1587.911
25	1322.160	1355.780	1389.000	1329.110
45	883.230	934.760	990.970	894.720
65	444.950	477.600	515.930	456.560
85	83.270	86.920	93.100	91.350
90	33.110	28.640	20.360	33.110
130	782.340	825.120	878.470	769.900
145	1119.860	1160.660	1205.750	1110.310
165	1496.030	1508.430	1521.900	1493.220
175	1588.610	1588.750	1591.100	1590.300
180	1608.340	1608.340	1608.340	1608.340

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 110 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35
2	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	36	34	29
3	74	63	55	49	68	59	52	46	50	44	40	42	38	34	34	31	29	25
4	68	56	48	42	62	52	45	40	45	39	35	37	33	30	31	28	25	22
5	63	50	42	37	58	47	40	34	40	34	30	34	30	26	28	25	22	19
6	58	46	38	32	53	42	35	30	36	31	27	31	26	23	26	22	20	17
7	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	18	15
8	50	38	30	25	46	35	28	24	30	25	21	26	22	19	22	18	16	14
9	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	13
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	13

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

OLS-DI-LED-2-S-4-D1000L-WW-U1000L-WW-DIM10-MVOLT-40K-85

INPUT WATTS: **76.3**

LUMENS: **8278**


CRI: **85**

EFFICACY: **108**

CCT: **4000K**

TEST NO.: **EL081815**

Candle Power Distribution (Candelas)

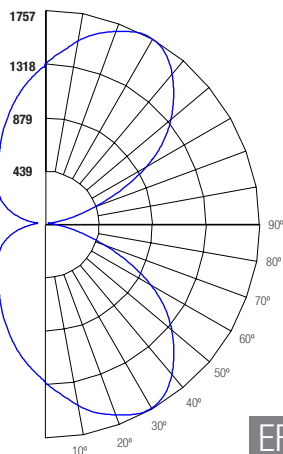

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1047.28	12.70	12.70
0-40°	1752.00	21.20	21.20
0-60°	3199.88	38.70	38.70
0-90°	4139.19	50.10	50.00
0-180°	8278.37	100.10	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	40999	39838	22374
45°	40607	40193	20522
55°	34997	39001	18302
65°	24298	34384	15022
75°	17505	27434	10016

Candela Tabulation

	0	45	90	180
0	1292.846	1292.846	1292.846	1292.846
25	1734.480	1558.810	1141.660	807.150
45	1509.680	1466.930	823.870	537.300
65	770.200	588.320	402.780	364.300
85	79.450	124.510	202.470	226.560
90	35.190	45.690	45.460	89.280
130	1372.740	1345.170	8.080	55.390
145	1720.990	1590.350	748.010	498.840
165	1606.860	1501.800	1029.250	645.640
175	1398.140	1368.520	1253.860	999.930
180	1277.240	1277.240	1296.580	1195.710

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 108 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	81	75	69	81	75	69	65	63	59	56	53	50	47	43	41	39	34
2	81	71	63	57	74	66	59	54	56	51	46	46	43	39	38	35	33	29
3	74	62	54	48	67	58	51	45	49	44	39	41	37	33	33	30	28	24
4	67	55	47	41	62	51	44	39	44	38	34	37	32	29	30	27	24	21
5	62	50	41	35	57	46	39	33	39	33	29	33	28	25	27	24	21	18
6	57	45	37	31	53	42	34	29	36	30	26	30	25	22	25	21	19	16
7	53	40	33	27	49	38	31	26	32	27	23	27	23	20	23	19	17	14
8	49	37	29	24	45	34	27	23	24	20	17	21	17	15	17	15	13	11
9	46	34	26	22	42	31	25	20	27	22	18	23	19	16	19	16	13	11
10	46	34	26	22	42	31	25	20	27	22	18	23	19	16	19	16	13	11

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

OLS-DI-LED-4-S-4-D1000L-U1000L-BW-DIM10-MVOLT-40K-85

INPUT WATTS: **76.6**

LUMENS: **8335**


CRI: **85**

EFFICACY: **109**

CCT: **4000K**

TEST NO.: **EL081815**

Candle Power Distribution (Candelas)

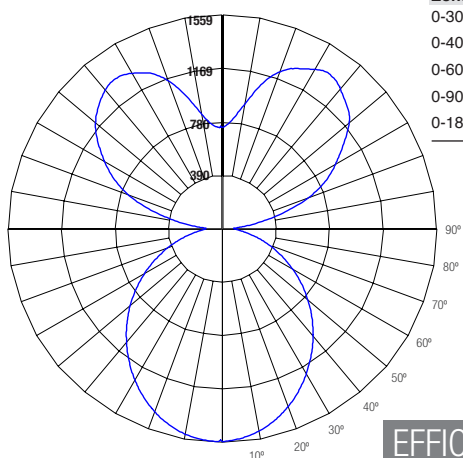

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1180.17	14.20	14.20
0-40°	1907.46	22.90	22.90
0-60°	3310.83	39.70	39.70
0-90°	4253.63	51.00	51.00
0-180°	8335.08	100.00	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	10688	10873	11085
45°	10078	10301	10437
55°	9403	9612	9625
65°	8838	8880	8527
75°	11366	9974	7462

Candela Tabulation

	0	45	90	180
0	1546.766	1546.766	1546.766	1546.766
25	1317.980	1327.740	1345.400	1335.830
45	927.660	943.690	962.120	942.630
65	487.770	498.600	499.280	494.920
85	121.590	106.700	79.830	125.340
90	96.010	66.390	9.980	104.650
130	1204.320	1025.170	472.100	1168.810
145	1370.510	1118.380	592.150	1325.560
165	1069.610	898.090	708.870	1020.070
175	778.050	765.690	747.400	767.760
180	747.400	747.400	804.170	747.400

Spacing Criteria

0-180	: N.A.
90-270	: N.A.
Diagonal	: N.A.

EFFICACY: 109 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC RW		80%				70%				50%				30%				10%				0%
		107	107	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
ROOM CAVITY RATIO	0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51			
	1	98	93	89	86	90	86	83	80	73	71	68	61	59	58	50	49	47	42			
	2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	44	42	40	35			
	3	81	71	64	58	74	66	59	54	56	51	47	47	43	40	39	36	34	30			
	4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25			
	5	68	56	48	42	62	52	45	39	45	39	34	38	33	30	31	28	25	22			
	6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	25	22	19			
	7	58	45	37	32	53	42	35	30	36	31	26	31	26	23	26	22	20	17			
	8	54	41	33	28	49	38	31	26	33	27	23	28	20	24	20	18	15	15			
	9	50	38	30	25	46	35	28	24	30	25	21	26	22	18	22	18	16	14			
10	47	34	27	22	43	32	26	21	28	23	19	24	20	17	20	17	14	12				
RC - Ceiling Cavity Reflectance										RW - Wall Reflectance												

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated contol systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹	☐ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ^{1,4}	☐ CU-4E-FMH Fixture Mount Control Unit ^{1,5}	☐ ZL027 -NOW Intellect Power Control Module ^{1,6}	☐ EN-WCM2-ZB-DR Wireless Control Module ^{1,7}	☐ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ^{1,8}	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1,9}
	☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-ECO Lutron Vive Eco-system Individual Control Models ^{1,4}		☐ ZL027 -DLE Intellect Power Control Module ^{1,6}	☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1,7}		☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ^{1,9}
INTEGRATED OCCUPANCY& DAYLIGHT SENSOR	N/A	☐ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ² ☐ ZL00J-DOW Intellect Intelligent Fixture Control System ²	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	☐ SNS200 SNS200 for grouping ² ☐ SNS300 SNS300 for networks ²	☐ FD-301 Fixture integrated Daylight Dimming Sensor ² ☐ FS-205 Fixture integrated passive infrared occupancy sensor ² ☐ LMFS-601 DLM Integrated Fixture Sensor and Controller, Occupancy, Daylight Harvesting, and IPv6/Bluetooth® Low Energy Technology
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted ³	☐ LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-EO Light Level Sensor - Ceiling Mounted ³	☐ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ☐ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	☐ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	☐ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESSORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ☐ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.