
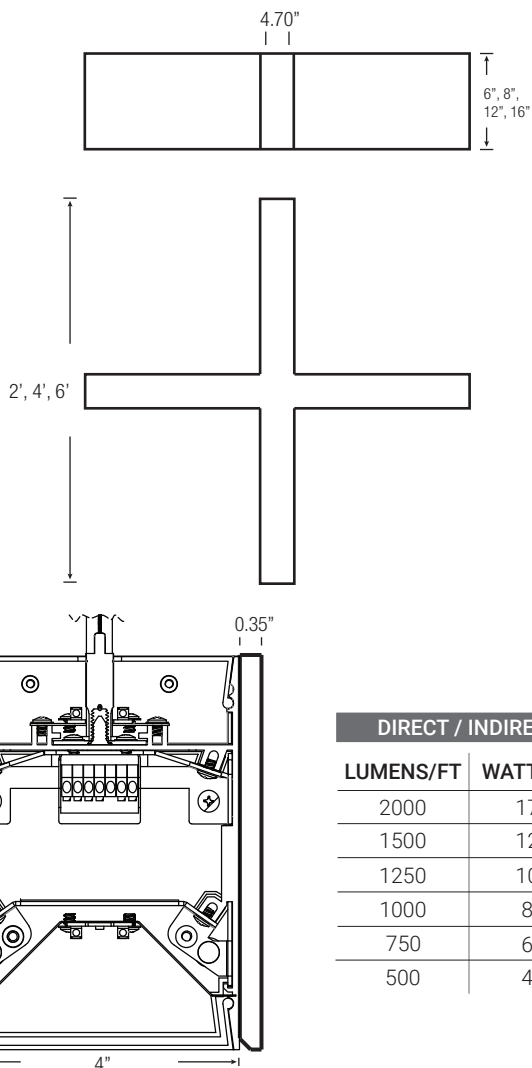


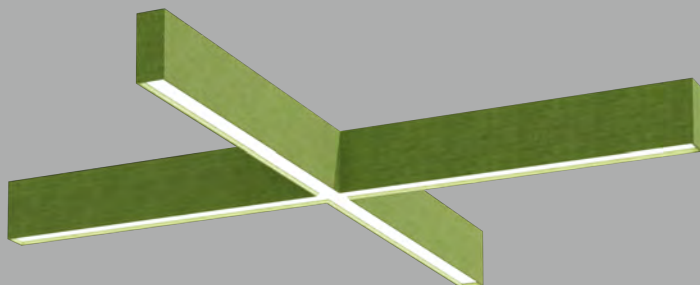


DIRECT / INDIRECT	
LUMENS/FT	WATTS/FT
2000	17.5
1500	12.7
1250	10.5
1000	8.2
750	6.5
500	4.5

DISTRIBUTION PATTERN

Direct/Indirect:
Standard

Direct: Standard
Indirect: Wall Wash

Direct: Standard
Indirect: Batwing

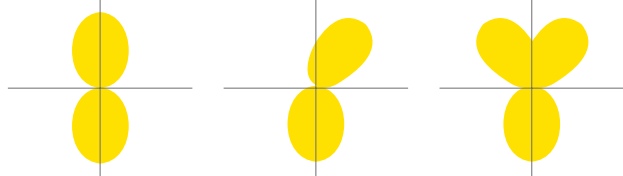

FEATURES

Verse from our SoftSense collection offers an aesthetically pleasing source of illumination in various shapes, while providing the solution to high noise levels found in open, multi-functional spaces. The sound absorbing material consists of 9mm thick PET felt, with 50% post-consumer recycled content: a strong, durable and versatile product that is available in an array of colors. With the ability to create a multitude of configurations, the luminaire can also be paired with unlit units to complement applications such as corporate offices, educational, commercial, and retail spaces, leaving a long-lasting impression.

LUMENS PER FOOT	500, 750, 1000, 1200, 1500, 2000 or Custom
CCT & DYNAMIC PLATFORMS	27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+ Standard, 90+
COLOR QUALITY	3 Step MacAdam Ellipse
WIDTHS	4"
LENGTHS	2', 4', 6'
HEIGHTS	6", 8", 12", 16"
DISTRIBUTION PATTERNS	Standard, Wall Wash, Batwing
CONFIGURATION PATTERNS & LENGTHS	X
MOUNTING	Suspended
MATERIAL COLORS	Refer to SoftSense Material Color Chart
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELD010.1, ELD0DMX.1, DALI.1
EMERGENCY	10W - Up to 1000L Output / 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory) EMG-LED-G2-20W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 83,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS & PERFORMANCE

Fabricated from 20-gauge aluminum, with mitered corners, and post-painted with 95% reflective premium paint. The optical system delivers high efficiency LED light that passes through a high quality acrylic lens for optimal distribution patterns, creating glare-free and even distributions, which includes Direct Downlight or Wall Wash with zero light leakage.

CONSTRUCTION

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

ACOUSTIC MATERIAL

Acoustic material is made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

OPTICAL ASSEMBLY

Reflector is fabricated from 20-gauge aluminum, and post-painted finish with 95% reflective premium paint. Wall Wash reflectors are positioned at an angle.

DISTRIBUTION PATTERNS & DIFFUSER

Standard Distribution - Available for both up and down. A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

Wall Wash Distribution - Illuminates from the ceiling down for uniform vertical illumination.

Batwing Distribution - Illuminates with a wide spread distribution for more energy efficiency and increased ceiling uniformity.

SUPPORT CABLE / FEED

Standard suspension is conductive feed/suspension cable. The adjustable power cable comes in a standard 10' length. A 5-conductor cable is standard or a 6-conductor cable for emergency power. Field adjustable length. Max. support every 8 feet. For longer cable, please consult factory.

CRM INSTALLATION


For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring, and each luminaire must be installed male to female.

OPTIONS

Available without light source.

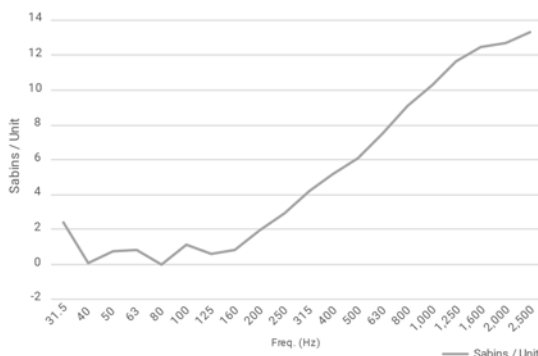

LED DYNAMIC PLATFORM OPTIONS

 Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K.

 Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3500K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space.

 RGB + White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

UI Listed for Damp location

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.



SOUND ABSORPTION RESULTS (from left to right)

A - acoustic performance

Felt Fixtures, alternating with / without light fixtures (8 units total)

B - spaced 12" on center

C - spaced 18" on center

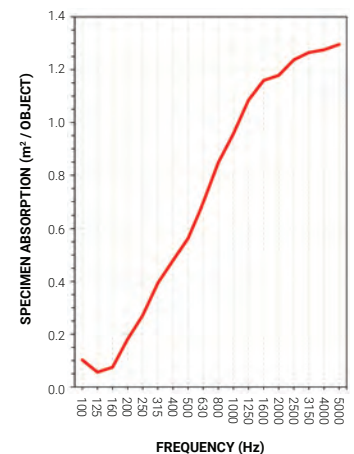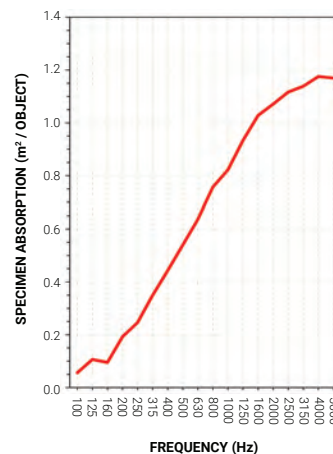


Example: **OLS-DI-VERSE-SOFT-X-4-46-12IN-D500L-U500L-1C-DIM10-MVOLT-35K-85-AP**

OLS-DI-VERSE-SOFT	X	4	2', 4', 6'												
SERIES OLS-DI-VERSE-SOFT SoftSense Suspended Direct / Indirect LED Rectangle	SHAPE X - X	WIDTH 4 - 4"	HEIGHT 6IN - 6 in. 8IN - 8 in. 12IN - 12 in. 16IN - 16 in.	DIRECT LUMENS D500L - per ft. D750L - per ft. D1000L - per ft. D1250L - per ft. D1500L - per ft. D2000L - per ft. NLS - no light source	INDIRECT LUMENS U500L - per ft. U750L - per ft. U1000L - per ft. U1250L - per ft. U1500L - per ft. U2000L - per ft.	DIMMING DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLum LUT2W ¹ - Lutron 2-wire ELD010.1 - EldoLED 0-10V DALI.1 - EldoLED DALI Type 8 ELD0DMX.1 - EldoLED DMX	CCT 27K 30K 35K 40K 50K	CRI 85 90	EMERGENCY 0-EMG-LED-10W 0-EMG-LED-20W 0-EMG-LED-G2-10W-SDT 0-EMG-LED-G2-20W-SDT	COLOR reference SoftSense material color chart example: GR - Gravel ST - Stone SU - Sunshine SB - Sky Blue DT - Dark Teal OR - Orange NV - Navy BL - Muted Blush AP - Apple Green PA - Passion AB - Abyss PU - Pure AR - Army Green PE - Pecan	OTHER OPTIONS FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interf. Sensor USA - Made in America Compliance				
				DISTRIBUTION (blank) - Standard	DISTRIBUTION (blank) - Standard WW - Wall Wash BW - Batwing	# OF CIRCUITS 1C Up and Down Lights Controlled Together 2C Up and Down Lights Controlled Individually	VOLTAGE 120 277 MVOLT 347*								

¹ LUT2W available in 120V
* Consult Factory
* See last page for sensor options


QUICK SHIP COLORS

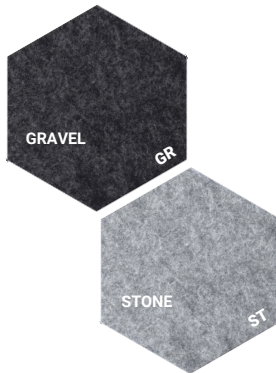

CUSTOM COLORS

Please consult factory for lead time and pricing.

STANDARD COLORS

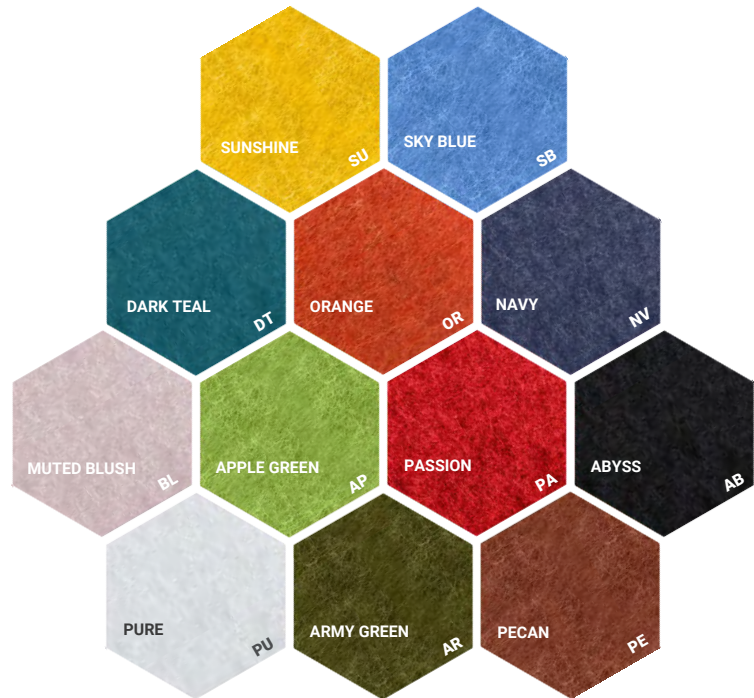


OLS-D-VERSE-SOFT-X-4-22-500L-DIM10-MVOLT-40K-85

TEST NO.: **EL09221338**

INPUT WATTS: **19.3** LUMENS: **2059** CRI: **85** EFFICACY: **107** CCT: **4000K**

Candle Power Distribution (Candelas)

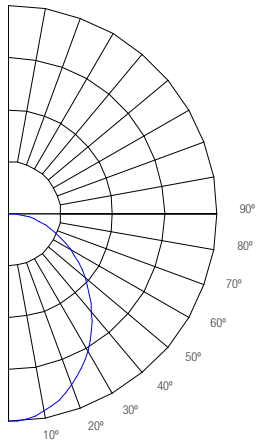

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0 - 30°	592.35	NA	28.80
0 - 40°	949.40	NA	46.10
0 - 60°	1615.78	NA	78.50
0 - 90°	2036.45	NA	98.90
0 - 180°	2058.7	NA	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	5010	5242	5524
55°	4591	4843	5152
65°	4197	4420	4766
75°	3814	3942	4149
85°	3772	3620	3603

Candela Tabulation

	0	45	90
0	791	791	791
5	785	784	785
15	737	742	748
25	653	665	680
35	547	566	587
45	435	478	479
55	323	341	363
65	218	229	247
75	121	125	132
85	40	39	39
90	9	6	2

Spacing Criteria

0 - 180	1.16
90 - 270	1.20
Diagonal	1.30

EFFICACY: 107 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	80%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	116	116	116	116	110	110	106	106	106	101	101	99
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	85
2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	71
3	90	80	71	65	87	78	70	64	75	68	63	72	66	62	69	61
4	83	71	62	55	80	69	61	55	67	59	54	64	58	53	62	50
5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	46
6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	40
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	36
8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	32
9	57	44	35	30	55	43	35	30	42	35	30	40	34	29	39	29
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	25


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

OLS-D-VERSE-SOFT-X-4-22-750L-DIM10-MVOLT-40K-85

TEST NO.: **EL092212442**

INPUT WATTS: **26.4** LUMENS: **2920** CRI: **85** EFFICACY: **111** CCT: **4000K**

Candle Power Distribution (Candelas)

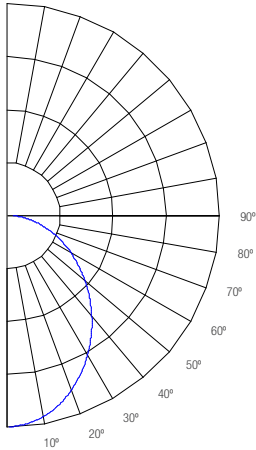

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0 - 30°	832.50	NA	28.50
0 - 40°	1338.52	NA	45.80
0 - 60°	2286.75	NA	78.30
0 - 90°	2890.07	NA	99.00
0 - 180°	2920.45	NA	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	7835	7406	7051
55°	7367	6875	6475
65°	6910	6398	5999
75°	6225	5781	5449
85°	5807	5453	5214

Candela Tabulation

	0	45	90
0	1111	1111	1111
5	1103	1102	1102
15	1053	1043	1035
25	958	936	917
35	830	797	769
45	680	643	612
55	519	484	456
65	358	332	311
75	198	184	173
85	62	58	56
90	8	9	10

Spacing Criteria

0 - 180	1.22
90 - 270	1.16
Diagonal	1.30

EFFICACY: 111 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	80%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	116	116	116	116	110	110	106	106	106	101	101	99
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	85
2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	71
3	90	80	71	65	87	78	70	64	75	68	63	72	66	62	69	61
4	83	71	62	55	80	69	61	55	67	59	54	64	58	53	62	50
5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	46
6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	40
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	36
8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	32
9	57	44	35	30	55	43	35	30	42	35	30	40	34	29	39	29
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	25


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

OLS-D-VERSE-SOFT-X-4-22-1000L-DIM10-MVOLT-40K-85

TEST NO.: **EL092219875**

INPUT WATTS: **37.1** LUMENS: **3996** CRI: **85** EFFICACY: **108** CCT: **4000K**

Candle Power Distribution (Candelas)

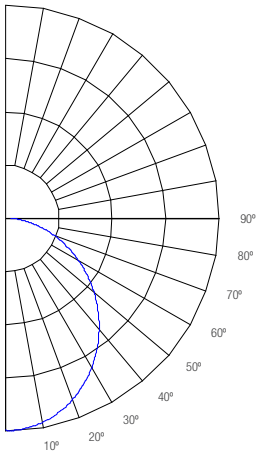

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0 - 30°	1142.18	NA	28.60
0 - 40°	1831.78	NA	45.80
0 - 60°	3128.95	NA	78.30
0 - 90°	3954.77	NA	99.00
0 - 180°	3996.48	NA	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	10792	10166	9680
55°	10138	9428	8897
65°	9395	8664	8138
75°	8550	7920	7486
85°	7960	7464	7202

Candela Tabulation

	0	45	90
0	1525	1525	1525
5	1521	1515	1514
15	1451	1433	1422
25	1321	1286	1259
35	1144	1094	1057
45	937	882	840
55	714	664	626
65	487	449	422
75	272	252	238
85	85	80	77
90	10	12	14

Spacing Criteria

0 - 180	1.22
90 - 270	1.16
Diagonal	1.30

EFFICACY: 108 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

RC	70%	80%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	119	119	119	119	116	116	116	116	110	110	106	106	106	101	101	99
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	85
2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	71
3	90	80	71	65	87	78	70	64	75	68	63	72	66	62	69	61
4	83	71	62	55	80	69	61	55	67	59	54	64	58	53	62	50
5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	46
6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	40
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	36
8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	32
9	57	44	35	30	55	43	35	30	42	35	30	40	34	29	39	29
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	25

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

1 Luminaire will be shipped with Powerpacks preinstalled, ready to be integrated to designated control systems

Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3 Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹	☐ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ^{1,4}	☐ CU-4E-FMH Fixture Mount Control Unit ^{1,5}	☐ ZL027 -NOW Intellect Power Control Module ^{1,6}	☐ EN-WCM2-ZB-DR Wireless Control Module ^{1,7}	☐ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ^{1,8}	☐ LMFC-011 ON/ OFF/0-10V dimming fixture controller ^{1,9}
	☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-ECO Lutron Vive Eco-system Individual Control Models ^{1,4}		☐ ZL027 -DLE Intellect Power Control Module ^{1,6}	☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1,7}		☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ^{1,9}
INTEGRATED OCCUPANCY& DAYLIGHT SENSOR	N/A	☐ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ²	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor	☐ SNS200 SNS200 for grouping ²	☐ FD-301 Fixture integrated Daylight Dimming Sensor ²
			☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	☐ ZL00J-DOW Intellect Intelligent Fixture Control System ²	☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	☐ SNS300 SNS300 for networks ²	☐ FS-205 Fixture integrated passive infrared occupancy sensor ²
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-E0 Occupancy Sensor - Ceiling Mounted ³	☐ LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-E0 Light Level Sensor - Ceiling Mounted ³	☐ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Independent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Surface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ☐ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	☐ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	☐ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESSORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor cable for CU-4 and IoT Ready ☐ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2- DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU- 5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.