

OVR-101-LED

LED Small Square Canopy Series

up to 60 Wattage / up to 8000 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

The Oracle LED Canopy Light is designed to provide an aesthetically pleasing low-profile luminaire that produces a high light output while keeping energy and maintenance costs low. Ideal for parking garages, walkways, storage areas, underpasses, and stairwells.


FEATURES:

- Sealed die-casting profile for outdoor applications
- MVOLT (120-277V)
- Lumen output from 4000-8000Lm with efficacy up to 141lm/W
- Increase energy savings with optional bi-level motion sensor
- Replacing 100W MH and 175W MH saving over 75% energy consumption
- Operating temperature is -40°C to 40°C (-40°F to 104°F)
- UL/cUL wet location
- DLC premium qualified**

DIMENSION:

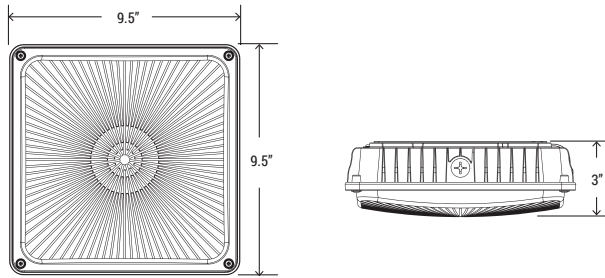

PHOTOMETRICS:

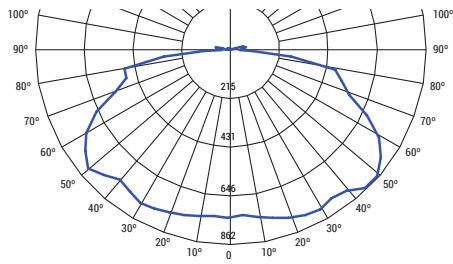

B	U	G
1	2	2



* For list of qualified
DLC fixture, please
consult factory

Ordering Guide > Example: OVR-101-LED-6000L-DIM10-MVOLT-40K-O-EMG-LED-BZ

OVR-101-LED							
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	OPTION
OVR-101-LED	4000L - 3800lumens 6000L - 5450 lumens 8000L - 8000 lumens	DIM10 - 0-10V Dimming	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze WH - White	O-EMG-LED External Installation	MS - Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1

