

OWP-FC-103-LED

LED Die-Cast Aluminum Slim Full Cut-Off Wall Pack Series

27 Wattage / 2500 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

The Compact Slim LED wall pack provides outdoor illumination for low mounting heights. When used in a continuous row they can be used to mark pathways and walkways. Ideal for low-ceiling locations such as entryways and carports that require pedestrian security in addition to illumination. Full cut-off meets Dark Sky requirements.


FEATURES:

- Precision die-cast aluminum profile for outdoor applications
- Lumen output of 3000lm with efficacy of 111lm/W
- Available in 0 to 10V and Triac Dimming
- High-temperature silicone gaskets
- Tempered glass lens
- High-performance LEDs maintain at least 70% of light output at 50,000 hours of service life
- UL listed

DIMENSION:

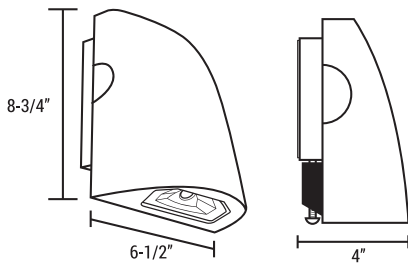

PHOTOMETRICS:

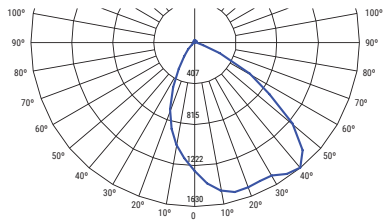

B	U	G
1	1	0

SPECIFICATIONS:

LUMENS 3000 Delivered lumens

WATTAGE 27W

CCT 40K, 50K

CRI 80

LIGHT EFFICIENCY 111 lumens/watt

VOLTAGE 120-277 VAC / 120V

POWER FREQUENCY 50/60 Hz

FINISH Bronze

APPLICABLE ENVIRONMENT Dry/Damp/Wet location

WORKING TEMPERATURE -40°C to 45°C

INSTALLATION:

Convenient cast-in template for easy mounting over standard 4" outlet box; or there are top, back, side 1/2" threaded hubs available for conduit entry.



Ordering Guide > Example: OWP-FC-103-LED-2500L-MVOLT-40K-BZ

OWP-FC-103-LED					
SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH	ACCESSORIES
OWP-FC-103-LED	2500L - 3000 Delivered lumens	DIM10-MVOLT DIMTR-120 MVOLT - 0-10V Dimming - Triac Dimming - None Dimmable	40K - 4000K 50K - 5000K	BZ - Bronze	WPPHC - Photocell