



SUGGESTED USE

For most commercial general-purpose medium to large areas outdoor lighting applications requiring high efficiency. Fixture is designed with no cut-off feature, allowing the fixture to cast illumination into 180 degree direction. Prismatic clear glass refractor is designed to symmetrically spread a uniform lighting distribution. Not appropriate for direct high-pressure water applications.

CONSTRUCTION

Die-cast aluminum housing with hinged door frame. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed specular anodized aluminum for high efficiency. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Prismatic glass refractor made of borosilicate material.

INSTALLATION - Convenient, easy mount over standard 4" outlet box or use 1/2" surface conduit. Side and back conduit entry taps.


LISTINGS - UL/C-UL for wet location.

LAMP - Included except for CFL option.


All specifications are subject to change without notice



Dimensions:

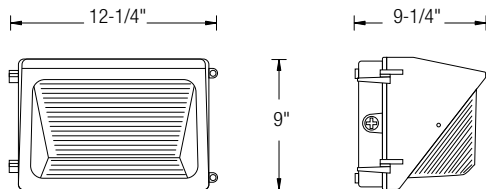

OWP-NC-101-MH-150-MVOLT



(Distance In Units Of Mounting Height)
(Values Based On 10 Foot Mounting Height)
(1/2 Maximum Candela Trace Shown As Dashed Curve)
(+) = Maximum Candela Point

Ordering Guide > Example: OWP-NC-101-MH-175-120-PC120-BZ

OWP-NC-101					
SERIES	WATTAGE	VOLTAGE	OPTIONS	COLOR	ACCESSORIES
OWP-NC-101	HPS, MH HPS-70 - (70W High Pressure Sodium) HPS-100 - (100W High Pressure Sodium) HPS-150 - (150W High Pressure Sodium) MH-70 - (70W Metal Halide) MH-100 - (100W Metal Halide) MH-150 - (150W Metal Halide) MH-175 - (175W Metal Halide)	HPS, MH^{1,4} - 120 - MVOLT (120/208/240/277) - 347 ⁵ - 480 ⁵	SWG - Steel Wire Guard PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse GS - Glare Shield O-EMG-750 - 750 lum. Emg. (CFL only) XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	BZ - Bronze WH - White	OWP-NC-101-RL - Replacement lens kit
	CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) CFL-2X42 - (2X42W Compact Fluorescent)	CFL^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347			

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.