

OWP-SL-101-LED

LED Die-Cast Slimline Wall Pack Series

25 Wattage / 2700 Lumens

Catalog Number:

Project Name:

Note:

Type:



APPLICATIONS:

The Slimline Wall Pack maintains a traditional appearance while reducing energy consumption by over 75%. Dusk to dawn technology ensures that the fixture will automatically turn on when light is needed. An ideal solution for multi-family, residential, apartment complexes, mobile home parks, and university housing.

FEATURES:

- Sealed die-casting profile for outdoor applications
- Consumes 25W to replace 50W HID
- MVOLT (120-277V)
- Lumen output of 2700 lumens with efficacy of 108lm/W
- Long lasting with lifespan 50,000 hrs
- Built-in UL Class 2 LED driver, 120-277V photocell included
- UL Wet location listed
- DLC qualified**


LENS:

Polycarbonate optical lens with UV stabilizers


SPECIFICATIONS:

LUMENS	2700 lumens
WATTAGE	25W
CCT	30K, 40K, 50K
CRI	70
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, White
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location

DIMENSION:

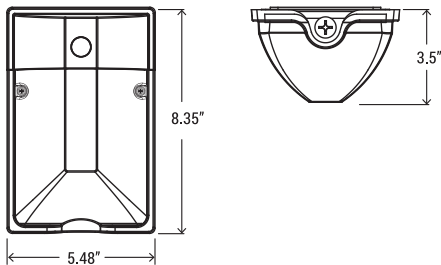

PHOTOMETRICS:

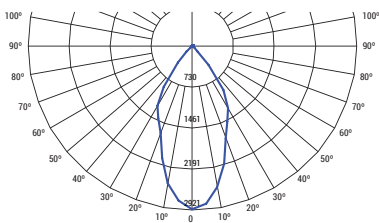

B	U	G
1	3	1



* For list of qualified DLC fixture, please consult factory

Ordering Guide > Example: OWP-SL-101-LED-2700L-MVOLT-40K-BZ

OWP-SL-101-LED				
SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH
OWP-SL-101-LED	2700L - 2700 lumens	MVOLT - 120/277V	30K - 3000K 40K - 4000K 50K - 5000K	BZ - Bronze WH - White

INSTALLATION:

Convenient cast-in template for easy mounting over a standard 4" outlet box; or there are bottom and back 1/2" threaded hubs available for conduit entry.

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.