

OWS-FC-303-LED

LED Round Full Cut-Off Wall Sconce Series

57 Wattage / 6000 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

The round architectural LED wall sconce provides efficient long lasting light ideal for wall wash and facade lighting. Traditional design allows for a simple upgrade from traditional MH fixtures. Multiple lumen packages improve design versatility and allow for consistent aesthetics throughout a project. Designed for walkways, entryways, and general perimeter lighting. Full cut-off meets Dark Sky requirements.


FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen output from 2300-5580lm with efficacy up to 90lm/W
- 25W-57W power consumption, to replace 100-200W MH
- Motion sensor and Photocell optional
- Optional battery back-up option for emergency egress lighting
- Type III polycarbonate optical lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location

DIMENSION:

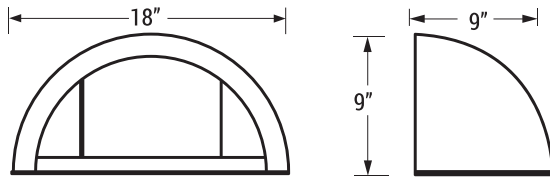

PHOTOMETRICS:

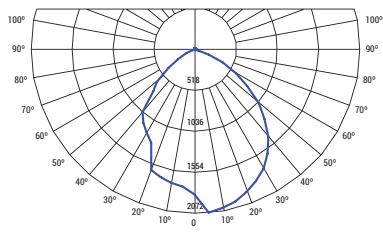

B	U	G
2	1	0

SPECIFICATIONS:

LUMENS	6000 lumens
WATTAGE	57W
CCT	40K
CRI	90
LIGHT EFFICIENCY	100 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze, White, Silver
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C



Ordering Guide > Example: OWS-FC-303-LED-6000L-MVOLT-40K-BZ

SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH	EMERGENCY	OPTION
OWS-FC-303-LED	6000L - 5580 lumens	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze WH - White SI - Silver	O-EMG-LED	PHC - Photocell MS - Remote Mount Motion Sensor MSPH - Remote Mount