

SLIM SURFACE LED

Square LED Slim Surface Mount Dimmable Fixture

Catalog Number:

Project Name:

Note:

Type:

1" Thick Surface LED Fixture

NEW



ENGINEERED FOR VERSATILITY AND PERFORMANCE

The Elite LED Slim Surface Mount has been engineered to install into most standard junction boxes. Up to 1200 usable lumens are directed from the luminaire to the work surface. Lighting is smooth and comfortable, all while using 75% less energy than the equivalent Incandescent. Features 50,000 hours of life, and California Title-24 compliance.

OPTICS

The Elite LED Module system is much more than just a simple LED retrofit. The Elite LED system is a highly engineered work of design and optical science which produces up to 1200 lumens. Our meticulously crafted optics gather the light scattered by the LED chip and shape it into a functional beam with uniform light distribution.

DIMMING

Intended for Triac (120V) base on configuration. Minimum 90° supply conductors.

COMPLIANCE


Non-conductive fixture for shower light application. Product complies with the requirements of the California Energy Commission regulated under Title 24.

LISTING

ETL listed for damp location (wet location - with covered ceilings)
Energy Star certified

WARRANTY

The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

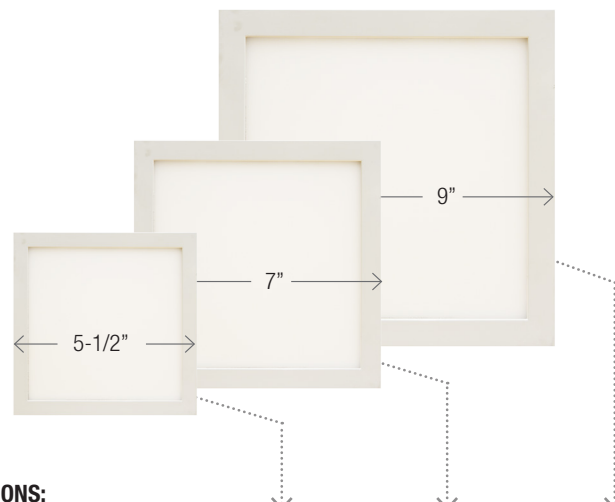

SPECIFICATIONS:

APERTURE	5.5"	7"	9"
LUMENS	600 lumens	900 lumens	1200 lumens
WATTAGE	10W	15W	20W
CCT	30K, 40K		
CRI	90		
VOLTAGE	120V		
POWER FREQUENCY	50/60 Hz		
FINISH	White		
APPLICABLE ENVIRONMENT	Damp location		

Compatible Junction Boxes:



Pancake J-Box
(Metal)



3.5" Round
(Plastic)



4" Square
(Plastic)



4" Octagonal
(Metal)



4" Square
(Metal)



Fire Rated
J-Box

Note: A 2-1/8" deep octagon junction box is recommended for through circuit wiring applications.

Ordering Information: Example: RL595-600L-DIMTR-120-30K-90-WH



SERIES/APERTURE/LUMENS
RL595-600L - 5.5" aperture/600 lumens
RL795-900L - 7" aperture/900 lumens
RL995-1200L - 9" aperture/1200 lumens



DIMMING
DIMTR - Triac



VOLTAGE
120 - 120V



CCT
30K - 3000K
40K - 4000K



CRI
90 - 90+ CRI



FINISH
WH - White



Submittal form is available @ www.iuseeliteled.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.