

EXITA SERIES

EMERGENCY LIGHTING
EXITA-2231



The EXITA-2231 is the Thermoplastic Running Man Sign exit light from Eralux. This exit light comes standard for mounting either on ceiling, wall or even for side installations. It also comes standard with three pictograms that be can changed in the field to offer versatility to the installation process.

Project: _____

Qty: _____

Notes: _____

OPERATING & ELECTRICAL

Input Voltage

120-347Vac

Max Input Current

80mA

APPLICATION CONDITION

Ambient temperature range

0 to 40°C

PERFORMANCE

CCT

5700-7200K

Power consumption

4.5 W

Run Time on Battery

120 min

COMPATIBLE MOUNTING

Installation

Surface, Wall or End installation

WARRANTY

System warranty

2 years

Recommended Battery replacement

4 years

MECHANICAL & HOUSING

Housing

UV Stabilized Thermoplastic

Finish

White

Power Supply



Factory wired electronic

LED driver

APPROVALS

UL Certified to C22.2 #141

DIMENSIONS

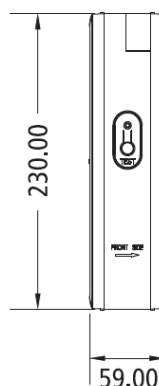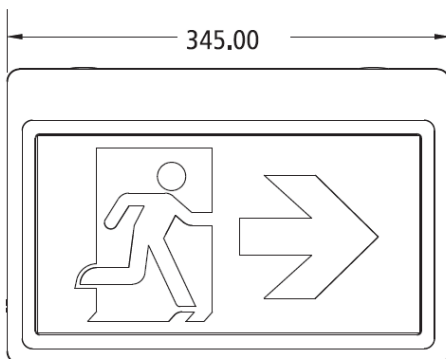

F2231CA
FIXTURE FAMILY
F2231CA
ERALUX emergency exit sign




EXITA SERIES


EMERGENCY LIGHTING
EXITA-2231

VERSATILITY


Wall Mounting

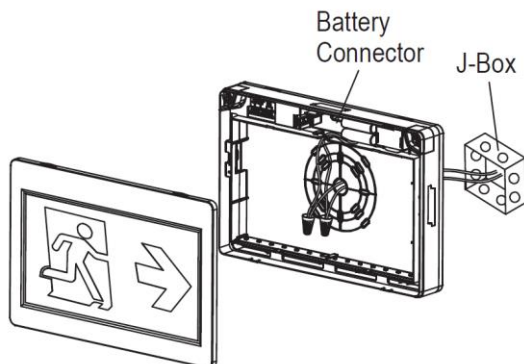

Side Mounting

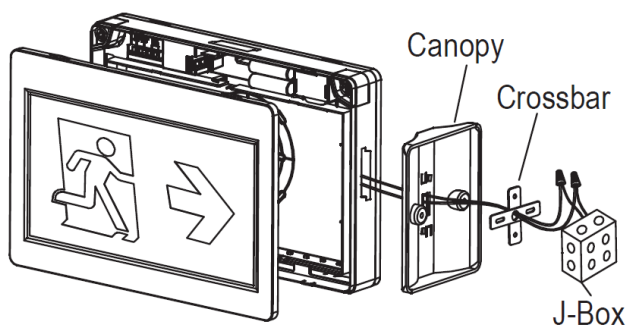

Ceiling Mounting

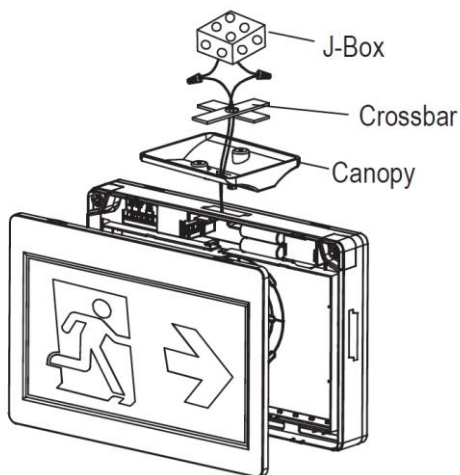

ERALUX Inc.
1-514-447-7598 | 1-630-534-2589
www.eralux.com

ERALUX Incorporation All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.

eralux

OVERVIEW



Test Switch

Side View

Input: AC120-347V/60Hz
Input Power: 4.5W
Emergency Power: 3W
CCT: 5700-7200K
 Overcharge/Over-discharge protection

Emergency Duration: ≥ 2 Hours
Recharge Time: ≤ 24 Hours
 High performance, Ni-Cad Battery Test Switch

Housing Material: UV Stabilized Thermoplastic
Universal Mounting: Ceiling, wall, end mount
 Suitable for Damp location

CONFIGURATIONS

Single or Double Face
 Comes standard with 4 pictograms:



Special French Pictogram

ERALUX Inc.
 1-514-447-7598 | 1-630-534-2589
www.eralux.com