

EXITA SERIES

EMERGENCY LIGHTING
EXITA-2408



The thermoplastic housing in the EXITA-2408 series along with the acrylic panel provides for a stylish finish and comes standard with three possible mounting methods. It also comes with the interchangeable pictograms to provide the adaptability to various requirement in the field. The EXITA-2408 is the exit sign of choice for style.

Project: _____
Qty: _____
Notes: _____

OPERATING & ELECTRICAL

Input Voltage 120-347Vac
Max Input Current 17 mA

PERFORMANCE

CCT 6500K
Power consumption 2.0 W
Run Time on Battery 90 min

MECHANICAL & HOUSING

Housing UV Stabilized Thermoplastic
Finish White
Power Supply Factory wired electronic LED driver

APPLICATION CONDITION

Ambient temperature range 0 to 40°C

COMPATIBLE MOUNTING

Installation Surface, Wall or End installation



WARRANTY

System warranty 2 years
Recommended Battery replacement 2 years

APPROVALS

UL Certified to C22.2 #141-15

DIMENSIONS

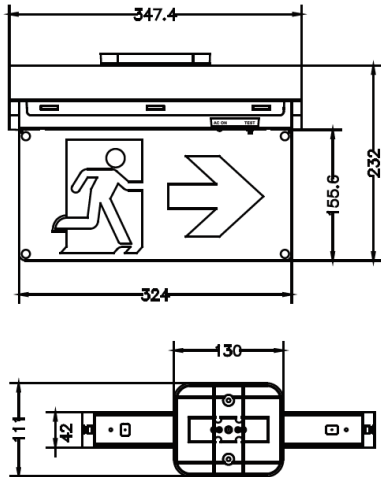

B2408U

FIXTURE FAMILY

B2408U

ERALUX emergency exit sign



ERALUX Incorporation All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.

OVERVIEW



Input: AC120-347V/60Hz

Input Power: 2 W

Emergency Power: 2 W

CCT: 6500K

Overcharge/Over-discharge protection

Emergency Duration: ≥ 1.5 Hours

Charge Time: ≤ 24 Hours

High performance, Ni-Cad Battery Test Switch

Housing Material: UV Stabilized Thermoplastic

Universal Mounting: Ceiling, wall, end mount

Suitable for Damp location

CONFIGURATIONS

Single or Double Face

Comes standard with 3 pictograms:



Front View



Side View



Top View

ERALUX Inc.
1-514-447-7598 | 1-630-534-2589
www.ERALUX.com