

LH4-120-L

Instant Start Fluorescent Ballast

- Solid State Electronic Ballast
- Input Voltage: 120VAC, 50/60Hz
- Instant Start
- UL Listed, Class P


General Specifications

Input Voltage	120VAC $\pm$ 10%, 50/60Hz
Power Factor	>0.9
EMI / RFI Compliance	FCC Part 18-A
Sound Rating	" A "
Ballast Type	Instant Start
Voltage Transients	ANSI C82.11 - 1993
Input Protection	Fuse
Remote Mounting	20ft Max.
Min. Operating Temp	-30°C (-20°F)
Max. Case Temp	70°C (158°F)
Approvals Class	UL Listed, Class "P", 1 or 2 Outdoor
Warranty	5 Years from the date of manufacture when properly installed

Electrical Data

Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	Ballast Factor	Efficacy Factor
F28T5	2	55	0.48	1.0	1.7

Mechanical Data

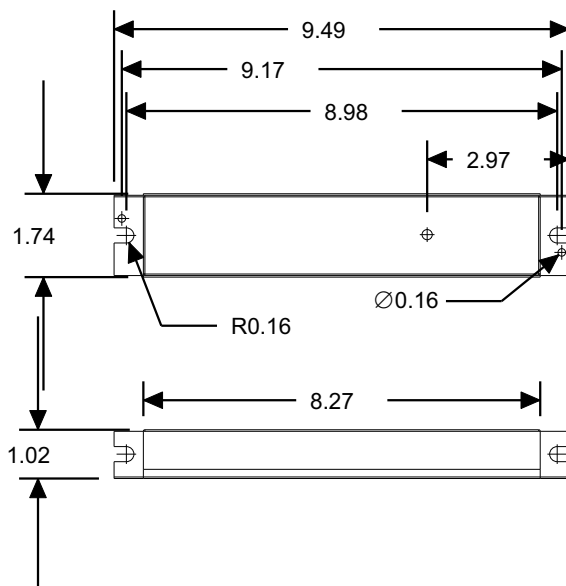

Wiring Diagram

Wire Color	Length (Inches)
Black	18" $\pm$ 1"
White	18" $\pm$ 1"
Red	36" $\pm$ 1"
Yellow	36" $\pm$ 1"

Wiring configurations vary depending on the lamp type.
Please refer to Fulham's Wiring Diagram Finder in the link below:

- <https://www.fulham.com/contact-us/wiring-diagrams/>

Where : L = Length, W = Width, H = Height