

PAR38 17W 277V TITANIUM CRI^{SP} LED SERIES



CRI^{SP}



17W REPLACES




120W
Hal.

80% Energy Savings

\$340 Savings
per lamp*

- ⌚ Direct line voltage 120-277V - Not compatible with ballasts
- ⌚ High efficacy 84 LPW in Warm White
- ⌚ Exceptional color rendering CRI 90
- ⌚ Richer reds and natural skin tones (R9 65, R13 90)
- ⌚ Tight LED binning for consistent CCT across all lamps
- ⌚ Suitable for use in totally enclosed fixtures



LM 79


LM 80

TM 21



PATENTED REFINE OPTIC

The innovative REFINE optic provides a high candela to lumen ratio, optimizing light usage for directional applications.

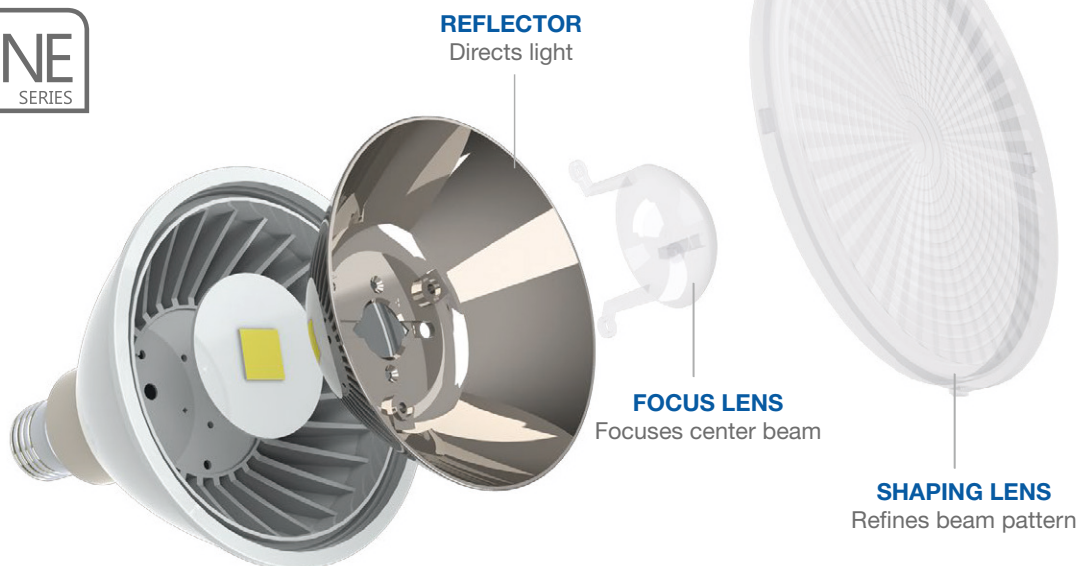


PAR38 17W 277V TITANIUM CRI^{SP} LED SERIES




ILLUMINANCE & CANDELA DISTRIBUTION


17PAR38/930FL40/277V

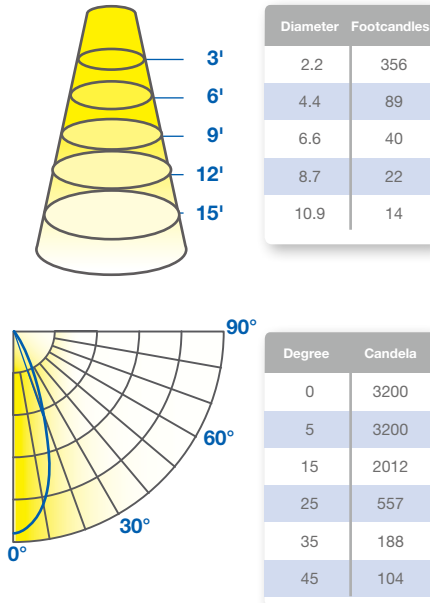

17PAR38/940FL40/277V

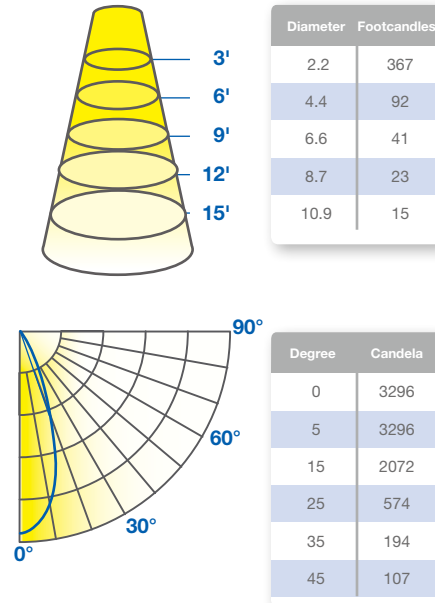

Base: E26
Voltage: 120-277V
Dimmable: No
PF: 0.9
Lifetime (L70): 50,000 hrs
Weight: 0.60lb / 272g



SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	R9 / R13 (typ.)	Lumens	LPW	Beam Angle	CBCP (cd)
17PAR38/930FL40/277V	58163	17	Warm White 3000K	90	65 / 90	1430	84	FL 40°	3200
17PAR38/940FL40/277V	58166	17	Cool White 4000K	90	65 / 90	1450	85	FL 40°	3300

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$8 halogen with 1500-hr lifetime, \$25 LED with 50,000-hr lifetime

** Suitable for use in totally enclosed fixtures

*** Not for use where directly exposed to weather or water