

PL V 8.5W HYBM

TITANIUM LED SERIES



PRO



PL:EDGE
SERIES

8.5W REPLACES



26W
CFL

60% Energy Savings


- HYBrid installation - DIrect or BYPass
- Compatible with magnetic ballasts - DIrect installation
- Built-in universal voltage driver - Bypass installation
- Compatible with G24d, GX24d, G24q & GX24q bases
- Innovative round design
- Exceptional efficacy 120 LPW




PL PRODUCT FEATURES

BYPass Installation - Electronic Ballasts

This PL V lamp is not compatible with electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

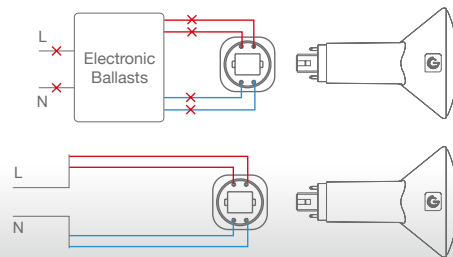

HYBrid Installation - DIrect or BYPass - Magnetic Ballasts

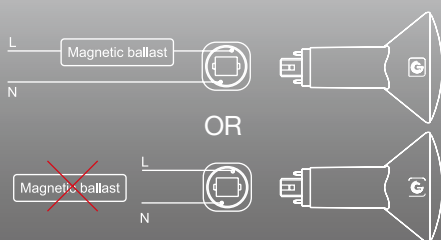


When used with a magnetic ballast, the PL V can function as a plug & play lamp and operate with the existing ballast. If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

PL V 8.5W HYBM TITANIUM LED SERIES




APPLICATIONS


Retail

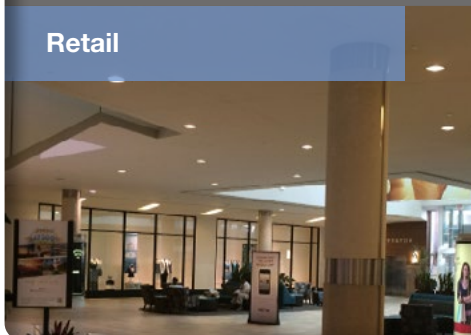


Hospitality

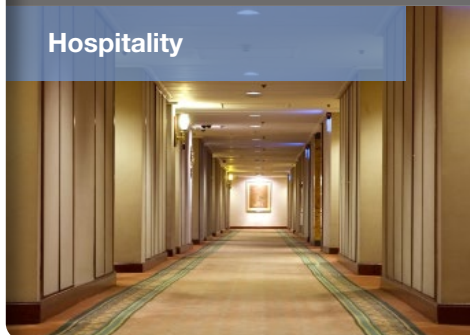

Office

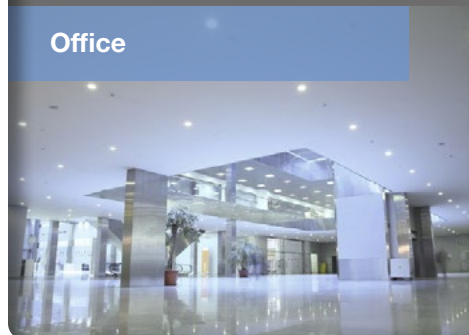

Base:	G24d, GX24d, G24q & GX24q (2/4-pin CFL)
Voltage:	Magnetic ballast compatible 120-277V
Dimmable:	No
PF:	0.9
Lifetime (L70):	50,000 hrs
Weight:	0.21lb / 95g
Min. compartment dimensions:	6-1/2" (DIA)x 8-3/4"(H)

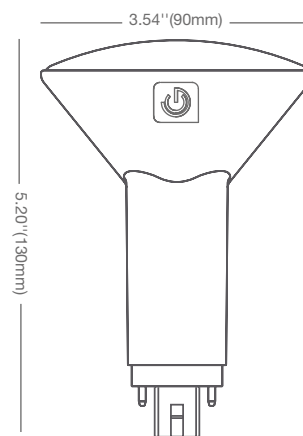

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
8.5PLV/827/HYBM	98387	8.5	Soft White 2700K	82	950	112	120°
8.5PLV/830/HYBM	98388	8.5	Warm White 3000K	82	1000	118	120°
8.5PLV/835/HYBM	98389	8.5	Neutral White 3500K	82	1000	118	120°
8.5PLV/840/HYBM	98390	8.5	Cool White 4000K	82	1020	120	120°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website

ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)