



72120FR



72120NP



72120NC



72120MB



72120ER

Features - Specifications

SINGLE FLUSH RECEPTACLE

- Face molded of impact/chemical-resistant nylon
- Base molded of reinforced thermoplastic polyester
- Combination back and side wiring, clamp-type terminals; accept #14 thru #8 AWG solid or stranded conductors
- One-piece rivetless copper-alloy contact design
- Heavy-duty mounting straps are nickel-plated to resist corrosion

PLUG AND CONNECTOR

- Impact/chemical-resistant toughened nylon construction

- Internal "self-centering" Quad-Gripper cord grip with "radius teeth" design
- Double wall construction
- EPDM dust seal surrounds cord to help prevent moisture and contaminants from entering wiring chamber
- Captive terminal screws are backed out to simplify wiring
- Combination Phillips/slotted terminal and assembly screws

MALE BASE AND FEMALE EQUIPMENT RECEPTACLE

- Impact/chemical-resistant toughened nylon construction
- Transparent terminal cover and extended "tear-drop" wiring pockets
- Combination Phillips/slotted terminal screws are backed out to simplify wiring

PLUG, CONNECTOR AND MALE BASE

- UL Listed File #E1381 – Guide #AXUT
- CSA Certified File #LR16215 –Guide #20T2

SINGLE AND FEMALE EQUIPMENT RECEPTACLE

- UL Listed File #E2258 – Guide #RTRT
- CSA Certified File #LR16215 –Guide #365E1

ALL LOCKING DEVICES

- Comply with NEMA Standards WD-1, WD-6 and UL 498. See page P-1 for Federal Specification Listing.
- NOM
- CE

LOCKING DEVICES

CATALOG NUMBER			CORD DIA.	DESCRIPTION
L21-20 20 AMP 120/208V 3ØY	L22-20 20 AMP 277/480V 3ØY	L23-20 20 AMP 347/600V 3ØY		
72120FR 72120IG ^①	72220FR —	72320FR —	— —	Single flush receptacle, black nylon Single flush receptacle, orange nylon, isolated ground
72120NP 72120NPB 72120NPC 72120NC 72120NCB 72120NCC 72120MB 72120ER	72220NP — — 72220NC — — 72220MB 72220ER	72320NP — — 72320NC — — 72320MB 72320ER	.465-1.150 ^② .465-1.150 ^② .465-1.150 ^② .465-1.150 ^② .465-1.150 ^② .465-1.150 ^② — —	Plug, black nylon Plug, black/white nylon Same as above w/Robertson screws Connector, black/white nylon Connector, black nylon Same as above w/Robertson screws Male base, white nylon cup Female equipment receptacle, white nylon cup


INDOOR AND OUTDOOR RECEPTACLE PLATES^③

CATALOG NUMBER	DESCRIPTION
S6111 S28111 N01111 7420B	Type 302/304 stainless steel, smooth, single-gang .040 (1.0) brass, smooth, single-gang Black nylon, smooth, single-gang Die cast aluminum, with cover, single-gang, box mount

WEATHER PROTECTIVE BOOTS^④

CATALOG NUMBER		DESCRIPTION
BLACK	YELLOW	
72002BPB 72002BCB 72002BSRB	72002BP 72002BC 72002BSR	Neoprene boot for use with plug Neoprene boot for use with connector Neoprene connector sealing ring

PRODUCT DIMENSIONS – () Indicates mm dimensions

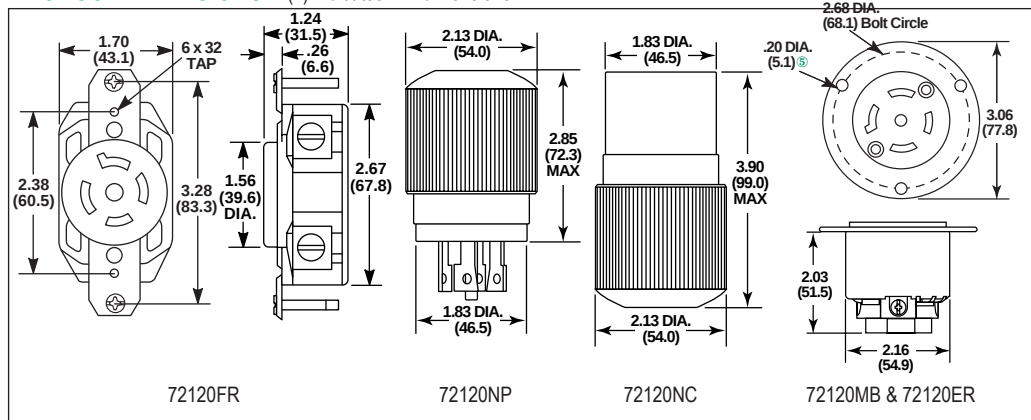

① See Section G for more information on isolated ground devices.

② .465-1.150 (11.8-29.2)

③ See Section M & N for more information on plates.

④ See page I-17 for more information on boots.

⑤ Three holes spaced 120 deg. apart on 2.68 (68.1) diameter bolt circle.

See page P-3 for horsepower ratings.

Specifications are subject to change without notice.