


Support Grips Standard Support

Hook End, Single Weave, Tin-Coated Bronze




Read This Data

It is important that you read all breaking strength, safety and technical data relating to this product on pages 83 through 88.

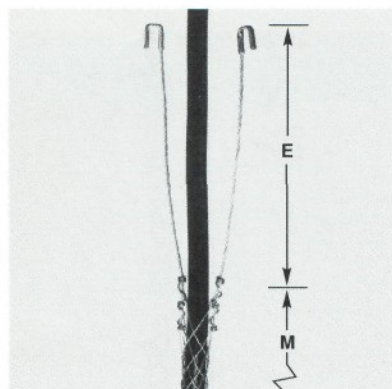


Hook End, Closed Mesh

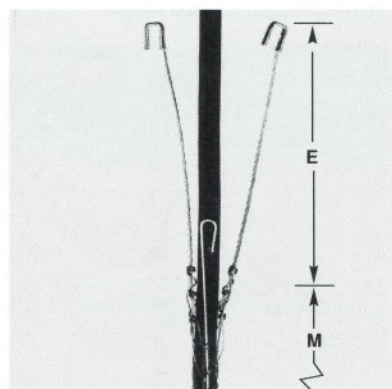

Hook End, Split Mesh, Rod Closing

Heavy Duty Support

Single Eye, Double Weave, Tin-Coated Bronze

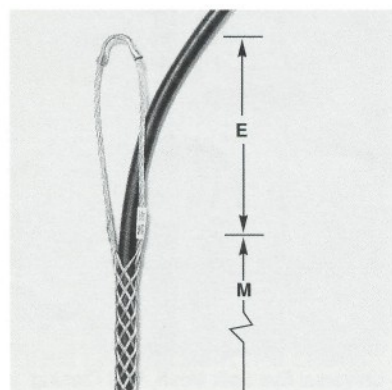

Heavy Duty, Single Eye, Closed Mesh

Note: Stainless steel support grips are available upon request. Consult factory for details.

Hook End, Closed Mesh

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm.)	Approx. Breaking Strength Lbs. (N)		E Inches (cm.)	M	Catalog Numbers
.50-.62 (1.27-1.57)	450	2002	10 (25.40)	10 (25.40)	022011261
.63-.74 (1.60-1.88)	750	3336	10 (25.40)	10 (25.40)	022011262
.75-.99 (1.90-2.51)	1000	4448	10 (25.40)	13 (33.02)	02201096
1.00-1.24 (2.54-3.15)	1400	6227	10 (25.40)	14 (35.56)	02201081
1.25-1.49 (3.17-3.78)	1400	6227	10 (25.40)	15 (38.10)	02201093
1.50-1.74 (3.81-4.42)	1400	6227	10 (25.40)	17 (43.18)	02201095
1.75-1.99 (4.44-5.05)	1600	7117	10 (25.40)	19 (48.26)	02201097
2.00-2.49 (5.08-6.32)	2200	9786	10 (25.40)	21 (53.34)	022011263
2.50-2.99 (6.35-7.59)	2200	9786	10 (25.40)	23 (58.42)	022011264
3.00-3.49 (7.62-8.86)	3200	14,234	10 (25.40)	25 (63.50)	022011265
3.50-3.99 (8.89-10.13)	3200	14,234	10 (25.40)	27 (68.58)	022011266

Hook End, Split Mesh, Rod Closing

For support when cable end is not available.

Cable Diameter Range Inches (cm.)	Approx. Breaking Strength Lbs. (N)		E Inches (cm.)	M	Catalog Numbers
.50-.62 (1.27-1.57)	750	3336	10 (25.40)	8 1/2 (21.59)	02203049
.63-.74 (1.60-1.88)	750	3336	10 (25.40)	8 1/2 (21.59)	02203050
.75-.99 (1.90-2.51)	1000	4448	10 (25.40)	10 1/2 (26.67)	02203051
1.00-1.24 (2.54-3.15)	1400	6227	10 (25.40)	12 1/2 (31.75)	02203053
1.25-1.49 (3.17-3.78)	1400	6227	10 (25.40)	14 1/2 (36.83)	02203054
1.50-1.74 (3.81-4.42)	1400	6227	10 (25.40)	15 1/2 (39.37)	02203055
1.75-1.99 (4.44-5.05)	1600	7117	10 (25.40)	16 1/2 (41.91)	02203056
2.00-2.49 (5.08-6.32)	2200	9786	10 (25.40)	19 1/2 (49.53)	02203057
2.50-2.99 (6.35-7.59)	2200	9786	10 (25.40)	21 1/2 (54.61)	02203058
3.00-3.49 (7.62-8.86)	3200	14,234	10 (25.40)	23 1/2 (59.69)	02203059
3.50-3.99 (8.89-10.13)	3200	14,234	10 (25.40)	25 1/2 (64.77)	02203060

E-Eye length M-Mesh length at nominal diameter

Heavy Duty, Single Eye, Closed Mesh

For heavy duty permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm.)	Approx. Breaking Strength Lbs. (N)		E Inches (cm.)	M	Catalog Numbers
.75-.99 (1.90-2.51)	2820	(12,543)	10 (25.40)	25 (63.50)	02206010
1.00-1.24 (2.54-3.15)	4280	(19,037)	12 (30.48)	28 (71.12)	02206011
1.25-1.49 (3.17-3.78)	4280	(19,037)	12 (30.48)	30 (76.20)	02206012
1.50-1.99 (3.81-5.05)	4280	(19,037)	12 (30.48)	34 (86.36)	02206013

E-Eye length M-Mesh length at nominal diameter