



Kellems® Wire Management Products

Service Drop Grips


Single Eye, Tin-Coated Bronze

WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-42 through T-46.



Light Duty, Single Eye, Closed Mesh, Single Weave

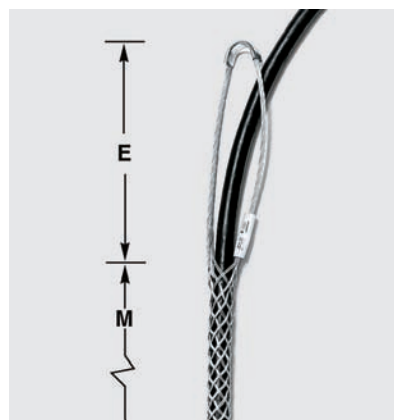

Heavy Duty, Single Eye, Closed Mesh, Multi-Weave

Light Duty, Single Eye, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	290 (1,290)	3" (7.62)	3.75" (9.52)	02216001
.29"-.37" (.74-.94)	290 (1,290)	5" (12.70)	4.25" (10.79)	02216002
.35"-.44" (.89-1.12)	500 (2,224)	5.5" (13.97)	4.75" (12.06)	02216003
.41"-.50" (1.04-1.27)	500 (2,224)	5.5" (13.97)	5" (12.70)	02216004
.46"-.56" (1.17-1.42)	660 (2,936)	6" (15.24)	5.25" (13.33)	02216005
.52"-.62" (1.32-1.57)	790 (3,514)	7" (17.78)	6.25" (15.87)	02216006
.58"-.68" (1.47-1.73)	790 (3,514)	7" (17.78)	6½" (16.51)	02216007
.64"-.75" (1.63-1.90)	790 (3,514)	7" (17.78)	6.75" (17.14)	02216008
.70"-.81" (1.78-2.06)	790 (3,514)	7" (17.78)	7.25" (18.41)	02216009
.75"-.87" (1.90-2.21)	1,020 (4,537)	8" (20.32)	8" (20.32)	02216010
.81"-.94" (2.06-2.39)	1,020 (4,537)	8" (20.32)	8.25" (20.95)	02216011
.87"-1.00" (2.21-2.54)	1,020 (4,537)	8" (20.32)	8.75" (22.22)	02216012
.94"-1.06" (2.39-2.69)	1,020 (4,537)	9" (22.86)	9" (22.86)	02216013
1.00"-1.18" (2.54-3.00)	1,020 (4,537)	9" (22.86)	9.5" (24.13)	02216014
1.06"-1.25" (2.69-3.17)	1,020 (4,537)	9" (22.86)	9.5" (24.13)	02216015


Heavy Duty, Single Eye, Closed Mesh, Multi-Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	500 (2,224)	5" (12.70)	4.5" (11.43)	02217001
.29"-.37" (.74-.94)	500 (2,224)	5" (12.70)	5.5" (13.97)	02217002
.35"-.44" (.89-1.12)	870 (3,870)	6" (15.24)	6.5" (16.51)	02217003
.41"-.50" (1.04-1.27)	870 (3,870)	6" (15.24)	7.5" (19.05)	02217004
.46"-.56" (1.17-1.42)	1,050 (4,670)	6" (15.24)	8" (20.32)	02217005
.52"-.62" (1.32-1.57)	1,050 (4,670)	7" (17.78)	8.5" (21.59)	02217006
.58"-.68" (1.47-1.73)	1,050 (4,670)	7" (17.78)	9.5" (24.13)	02217007
.64"-.75" (1.63-1.90)	1,390 (6,183)	7" (17.78)	9.5" (24.13)	02217008
.70"-.81" (1.78-2.06)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217009
.75"-.87" (1.90-2.21)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217010
.81"-.94" (2.06-2.39)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217011
.87"-1.00" (2.21-2.54)	1,790 (7,962)	8" (20.32)	11.5" (29.21)	02217012
.94"-1.06" (2.39-2.69)	1,790 (7,962)	9" (22.86)	12.5" (31.75)	02217013
1.00"-1.18" (2.54-3.00)	1,790 (7,962)	9" (22.86)	13.5" (34.29)	02217014
1.06"-1.25" (2.69-3.17)	1,790 (7,962)	9" (22.86)	14.5" (36.83)	02217015

Note: E-Eye length.

M-Mesh length at nominal diameter.

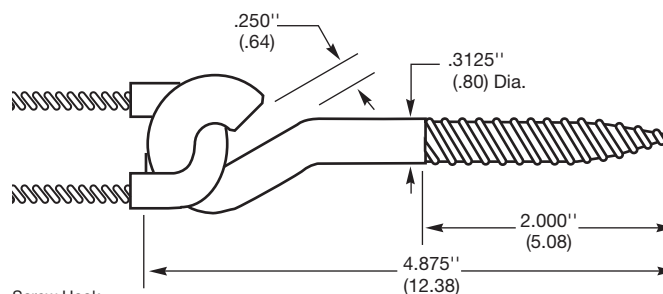

Screw Hook
Catalog Number 20303001
Yield Strength 900 lbs (4003 N)

Kellems® Wire Management Products

Service Drop Grips

Universal Eye, Tin-Coated Bronze



Light Duty, Universal Eye, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	290 (1,290)	9" (22.86)	3.75" (9.52)	02216016
.29"-.37" (.74-.94)	290 (1,290)	10" (25.40)	4.25" (10.79)	02216017
.35"-.44" (.89-1.12)	500 (2,224)	10" (25.40)	4.75" (12.06)	02216018
.41"-.50" (1.04-1.27)	500 (2,224)	11" (27.94)	5" (12.70)	02216019
.46"-.56" (1.17-1.42)	660 (2,936)	12" (30.48)	5.25" (13.33)	02216020
.52"-.62" (1.32-1.57)	790 (3,514)	13" (33.02)	6.25" (15.87)	02216021
.58"-.68" (1.47-1.73)	790 (3,514)	13" (33.02)	6.5" (16.51)	02216022
.64"-.75" (1.63-1.90)	790 (3,514)	13" (33.02)	6.75" (17.14)	02216023
.70"-.81" (1.78-2.06)	790 (3,514)	13" (33.02)	7.25" (18.41)	02216024
.75"-.87" (1.90-2.21)	1,020 (4,537)	14" (35.56)	8" (20.32)	02216025
.81"-.94" (2.06-2.39)	1,020 (4,537)	14" (35.56)	8.25" (20.95)	02216026
.87"-1.00" (2.21-2.54)	1,020 (4,537)	14" (35.56)	8.75" (22.22)	02216027
.94"-1.06" (2.39-2.69)	1,020 (4,537)	15" (38.10)	9" (22.86)	02216028
1.00"-1.18" (2.54-3.00)	1,020 (4,537)	15" (38.10)	9.5" (24.13)	02216029
1.06"-1.25" (2.69-3.17)	1,020 (4,537)	15" (38.10)	9.5" (24.13)	02216030

WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-42 through T-46.



Light Duty, Universal Eye,
Closed Mesh, Single Weave

Heavy Duty, Universal Eye, Closed Mesh, Multi-Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	500 (2,224)	11" (27.94)	4.5" (11.43)	02217016
.28"-.37" (.74-.94)	500 (2,224)	11" (27.94)	5.5" (13.97)	02217017
.35"-.44" (.89-1.12)	870 (3,870)	12" (30.48)	6.5" (16.51)	02217018
.41"-.50" (1.04-1.27)	870 (3,870)	12" (30.48)	7.5" (19.05)	02217019
.46"-.56" (1.17-1.42)	1,050 (4,670)	12" (30.48)	8" (20.32)	02217020
.52"-.62" (1.32-1.57)	1,050 (4,670)	13" (33.02)	8.5" (21.59)	02217021
.58"-.68" (1.47-1.73)	1,050 (4,670)	13" (33.02)	9.5" (24.13)	02217022
.64"-.75" (1.63-1.90)	1,390 (6,183)	13" (33.02)	9.5" (24.13)	02217023
.70"-.81" (1.78-2.06)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	02217024
.75"-.87" (1.90-2.21)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	02217025
.81"-.94" (2.06-2.39)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	02217026
.87"-1.00" (2.21-2.54)	1,790 (7,962)	14" (35.56)	11.5" (29.21)	02217027
.94"-1.06" (2.39-2.69)	1,790 (7,962)	15" (38.10)	12.5" (31.75)	02217028
1.00"-1.18" (2.54-3.00)	1,790 (7,962)	15" (38.10)	13.5" (34.29)	02217029
1.06"-1.25" (2.69-3.17)	1,790 (7,962)	15" (38.10)	14.5" (36.83)	02217030

Note: E-Eye length.

M-Mesh length at nominal diameter.



Heavy Duty, Universal Eye,
Closed Mesh, Multi-Weave