

Strain Relief Deluxe Cord Grips

Aluminum Fittings, Stainless Steel Mesh, Liquidtight, for Insulated Cables



90° Male Thread

Grip Diameter Range Inches	(cm.)	Thread Size N.P.T. (Inches)	Form Size	Catalog Numbers
.250-.312	(.63-.79)	3/8"	F1	07401071
.312-.375	(.79-.95)			07401072
.375-.437	(.95-1.11)			07401073
.187-.250	(.47-.63)	1/2"	F2	07401074
.250-.375	(.63-.95)			07401076
.375-.500	(.95-1.27)			07401078
.500-.625	(1.27-1.59)			07401080*
.375-.500	(.95-1.27)	3/4"	F3	07401081
.500-.625	(1.27-1.59)			07401083*
.625-.750	(1.59-1.90)			07401084*
.750-.875	(1.90-2.22)			074011275*
.375-.500	(.95-1.27)	1"	F4	074011197
.500-.625	(1.27-1.59)			07401085
.625-.750	(1.59-1.90)			07401087
.750-.875	(1.90-2.22)			07401089
.875-1.000	(2.22-2.54)			07401091*
1.000-1.125	(2.54-2.86)	1 1/4"	F5	074011229*
.750-.875	(1.90-2.22)			074011230
.875-1.000	(2.22-2.54)			07401137
1.000-1.125	(2.54-2.86)			07401108
1.125-1.250	(2.86-3.17)			074011042*
.875-1.000	(2.22-2.54)	1 1/2"	F5	074011044
1.000-1.125	(2.54-2.86)			074011045
1.125-1.250	(2.86-3.17)			074011046
1.250-1.375	(3.17-3.49)			074011047
1.312-1.437	(3.33-3.65)	2"	F6	074011233
1.437-1.562	(3.65-3.97)			074011244
1.562-1.687	(3.97-4.28)			074011245
1.687-1.812	(4.28-4.60)			074011246
1.750-1.875	(4.44-4.76)			074011234*

Female Thread


.250-.312	(.63-.79)	3/8"	F1	07401036
.312-.375	(.79-.95)			07401037
.375-.437	(.95-1.11)			07401038
.187-.250	(.47-.63)	1/2"	F2	07401039
.250-.375	(.63-.95)			07401041
.375-.500	(.95-1.27)			07401043
.500-.625	(1.27-1.59)			07401045
.250-.375	(.63-.95)	3/4"	F2	07401048
.375-.500	(.95-1.27)			07401050
.500-.625	(1.27-1.59)			07401052
.625-.750	(1.59-1.90)	3/4"	F4	07401053
.750-.875	(1.90-2.22)			074011268*
.500-.625	(1.27-1.59)	1"	F4	07401054
.625-.750	(1.59-1.90)			07401056
.750-.875	(1.90-2.22)			07401058
.875-1.000	(2.22-2.54)			07401060
1.000-1.125	(2.54-2.86)			074011269*

45° Male Thread


.250-.375	(.63-.95)	1/2"	F2	074011236
.375-.500	(.95-1.27)			074011021
.500-.625	(1.27-1.59)			074011237*
.375-.500	(.95-1.27)	3/4"	F3	074011238
.500-.625	(1.27-1.59)			074011049
.625-.750	(1.59-1.90)			074011051*
.750-.875	(1.90-2.22)			074011239*
.500-.625	(1.27-1.59)	1"	F4	074011053
.625-.750	(1.59-1.90)			074011055
.750-.875	(1.90-2.22)			074011057
.875-1.000	(2.22-2.54)			074011199*
1.000-1.125	(2.54-2.86)			074011240*
.750-.875	(1.90-2.22)	1 1/4"	F5	074011241
.875-1.000	(2.22-2.54)			074011022
1.000-1.125	(2.54-2.86)			074011059
1.125-1.250	(2.86-3.17)			074011060*
1.250-1.375	(3.17-3.49)	1 1/2"	F5	074011061*
1.000-1.125	(2.54-2.86)			074011063
1.125-1.250	(2.86-3.17)			074011064
1.250-1.375	(3.17-3.49)			074011065

Read This Data


It is important that you read all breaking strength, safety and technical data relating to this product on pages 20 through 32.

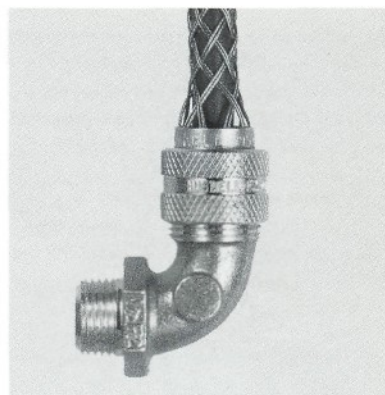

90°

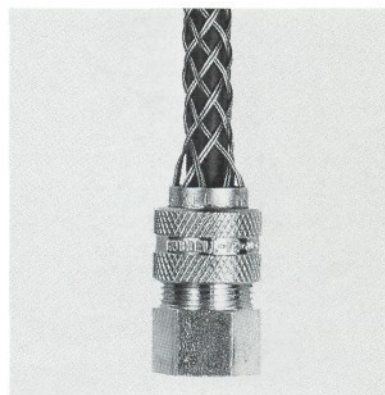

Female

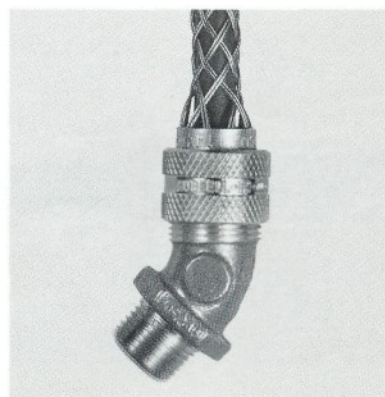

45°

*Cable jacket may have to be stripped to pass through connector body.

Kellems® Grips for Strain Relief

Liquidtight, Dusttight

For Insulated Cables and Flexible, Liquidtight Conduits

Endless weave provides easy cable/flexible conduit installation.

Stainless steel mesh is corrosion resistant. Can be used inside or outside. It eliminates cable or flexible conduit pull-out and reduces costly downtime.

Multiweave grip gives cable arc-of-bend control minimizing cable damage and extending cable life. It is the strongest strain relief device available. Meets and exceeds all code requirements. Prevents cable/conduit pull-out.

A liquidtight fitting is available with both cable and conduit fittings. Prevents liquids from running through the fitting into the enclosure.

An NPT threaded body allows easy attachment to either threaded hub or knock-out in box.

