

Ground Fault Products

2 Pole 3 Wire Grounding

15 Ampere, 120 Volt AC

Straight Blade Portable GFCI Plugs

NEMA 5-15P
15A 125V
UL CSA
0.5 HP

**Circuit Guard® Wired On Industrial Portable GFCI Plug**

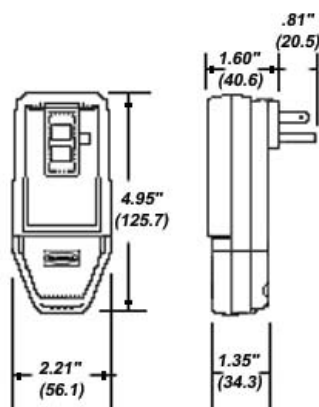
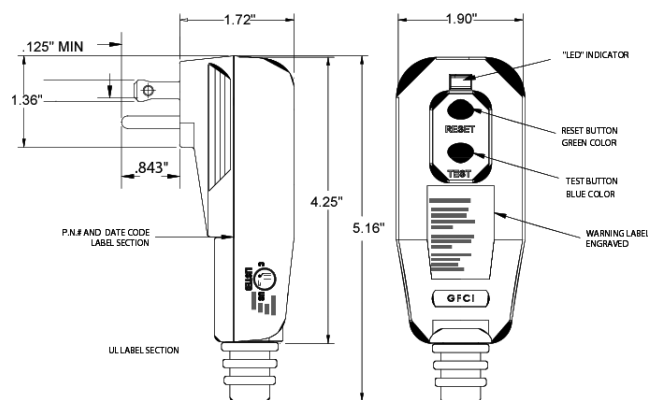
Description	Rating	Catalog Numbers
GFCI plug, manual set, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P.	GFP5266C
GFCI plug, manual set, yellow.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P.	GFP5266CY
GFCI plug with 1 foot line cord, manual set, yellow, with connector body.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P, NEMA 5-15R.	GFP1C

**GFP5266CY****Circuit Guard® Wired On Commercial Portable GFCI Plug**

Description	Rating	Catalog Numbers
GFCI plug, automatic set field wireable, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P.	GFP515A
GFCI plug, manual set field wireable, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P.	GFP515M

Specifications

Trip Level	4 to 6 mA.
Trip Time	.025 sec. nominal.
Frequency	60 Hz.
Voltage	120V AC +10% – 15%. Incorporates no voltage release feature.
Amperage	15A.
Maximum Interrupting Capacity	2000A.
Operating Temperature	-35°C to +66°C or -30°F to +150°F.
Maximum Humidity	95%.
Housing	High-impact, UV stabilized rigid PVC. UL 94V-0 flammability classification.
Input	NEMA 5-15P.
Cord Range	16/3 – 12/3 Type SJ, 18/3 – 12/3 Type S
Cord Type: Length (GFP1C)	14/3 Type SJTW-A (UL), SJTW (CSA); 1 foot; NEMA 5-15R.
Power "ON" Indication	Neon indicator light.
Listings	Meets UL943 2003 Class A Listed, CSA Certified.
Codes	Meets all NEC® and CEC requirements.

**GFP515A****GFP5266C Series- Dimensions****GFP515- Dimensions**