
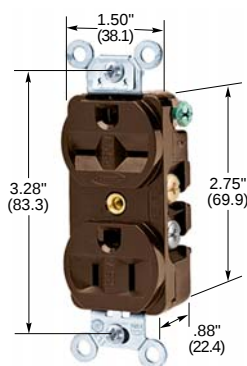


Straight Blade Devices

2 Pole, 3 Wire Grounding

15 and 20 Ampere

Miscellaneous and Combination Receptacles**HBL5236****HBL5235****HBL9259****HBL5292**

NEMA 5-15R
15A 125V
UL CSA
0.5 HP

Miscellaneous Receptacles

Description	Catalog Numbers
Receptacle, display type, brown phenolic, with .060" brass plate and blank flush plug.	HBL5236*
Replacement receptacle for HBL5236.	HBL5236M2
Receptacle, display type, brown phenolic, with .060" brass plate, blank flush plug and a box for wood floors.	HBL6236
Receptacle, clock hanger, brown with stainless steel plate.	HBL5235
Four outlet cluster, brown phenolic, steel cover, swivel hook. Cord grip range .296"-.562" (7.5-14.3) cord not supplied.	HBL9259*

* Not listed by Underwriters Laboratories Inc. nor CSA certified.

Special Combination Duplex Receptacles

Description	Catalog Numbers
15A, 125V Brown RTP, 1 feed, 1 return, back/side wired.	HBL4792
Brown RTP, 2 feeds, 1 return, side wired.	HBL4794
15A, 125V Brown RTP, 2 feeds, 2 returns, side wired.	HBL4795
15A, 250V Brown nylon face, 2 circuit, back and side wired.	HBL5292
Ivory nylon face, 2 circuit, back and side wired.	HBL5292I
15A, 125V Brown nylon face, 2 circuit, back and side wired.	HBL5492
20A, 250V Ivory nylon face, 2 circuit, back and side wired.	HBL5492I
20A, 125V Brown RTP, 2 feeds, 1 return, common ground.	HBL7371
15A, 125V Brown RTP, 2 feeds, 1 return, common ground.	HBL7371
10A, 250V Brown RTP, 2 feeds, 1 return, common ground.	HBL7371
15A, 125V Brown RTP, 2 feeds, 1 return, common ground.	HBL7371
20A, 125V Brown nylon, side and back wired.	HBL5392
20A, 125V Brown nylon, side and back wired.	HBL5392

Note: RTP is an abbreviation for reinforced thermoplastic polyester.