

Straight Blade Devices

2 Pole, 3 Wire Grounding

15 and 20 Ampere, 250 Volts

Connectors and Flanged Receptacles



IP20
SUITABILITY




NEMA 6-15R
15A 250V
UL CSA




NEMA 6-20R
20A 250V
UL Listed

Connector Bodies

Description	Cord Dia.	Catalog Numbers	
Insulgrip® connector, HBL5469C black and white nylon, Phillips/slotted screws.	.230-.720" (5.8-18.3)	NEW	HBL5669C
Valise® connector, yellow nylon, slotted screws.	.220-.660" (5.6-16.8)	HBL5669VY	HBL5469VY



HBL5669C

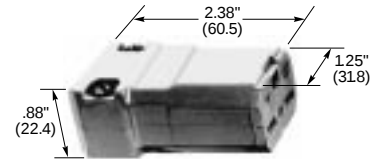

HBL5669VY



Flanged Receptacles


Description	Catalog Numbers	
Nylon casing, Phillips/slotted screws.	NEW	HBL5679C HBL5479C
Nickel plated brass flange, brown phenolic housing, slotted screws. (Mounting screws packed separately.)	HBL5656	




NEMA 6-15R
15A 250V
UL CSA




NEMA 6-20R
20A 250V
UL Listed



HBL5679C



HBL5656



IP20
SUITABILITY




NEMA 6-15R
15A 250V
UL CSA



NEMA 6-20R
Canadian
20A 250V
UL CSA

Connector Bodies with Robertson/Slotted Screws

Description	Cord Dia.	Catalog Numbers	
Insulgrip connector, black and white nylon.	.230-.720" (5.8-18.3)	NEW	HBL5669CCN HBL6394CCN
Valise connector, yellow nylon	.220-.660" (5.6-16.8)	HBL5669VYCN	



HBL6394CCN

Note: See page A-43 for accessories.