









# Multichannel Raceway BASETRAK® Face Plates











All PolyTrak® boxes use Hubbell "KP" series one-gang and two-gang device face plates. These plates accommodate a wide variety of wiring devices and data/voice connectors in many different configurations. "KP" face plates are designed to fit flat and flush with PolyTrak boxes. **Jacks and connectors are sold separately, unless noted otherwise.**

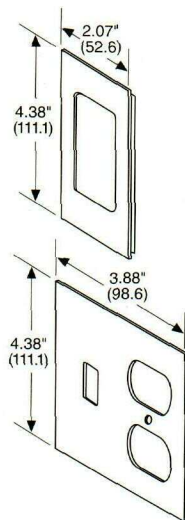
## Single-Gang

| Catalog Numbers<br>Description                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>KP1</b><br>Toggle switch.                                               |
|  <b>KP7</b><br>Single receptacle<br>1.41" (3.5) boss dia.                   |
|  <b>KP8</b><br>Duplex                                                       |
|  <b>KP14</b><br>Blank.                                                     |
|  <b>KP26</b><br>GFCI or Style Line®.                                      |
|  <b>KP2140</b><br>Coaxial-Jack.                                           |
|  <b>KP212</b><br>Coaxial-Coaxial.                                         |
|  <b>KP2163</b><br>Jack-Jack-Jack<br>(center hole is open)                 |
|  <b>KP720</b><br>Single - 20/30A<br>Twist-Lock®<br>1.60" (40.5) boss dia. |
|  <b>KP2162</b><br>Jack-Jack.                                              |

## Two-Gang

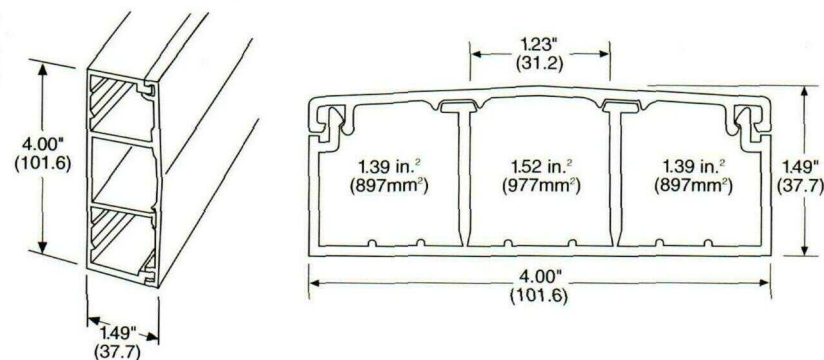
| Catalog Numbers<br>Description                                                                                    | Catalog Numbers<br>Description                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>KP24</b><br>Blank.           |  <b>KP2148</b><br>Jack, Coax-Duplex.                            |
|  <b>KP262</b><br>(2) GFCI.       |  <b>KP2168</b><br>3 Jack-Duplex.                                |
|  <b>KP2216</b><br>4 Jack.        |  <b>KP2LANA</b><br>IBM LAN opening<br>with 4-pr. jack included. |
|  <b>KP82</b><br>Duplex-Duplex. |  <b>KP2</b><br>Toggle-Toggle.                                 |
|                                                                                                                   |  <b>KP18</b><br>Toggle-Duplex.                                |

## "KP" Plate Dimensions



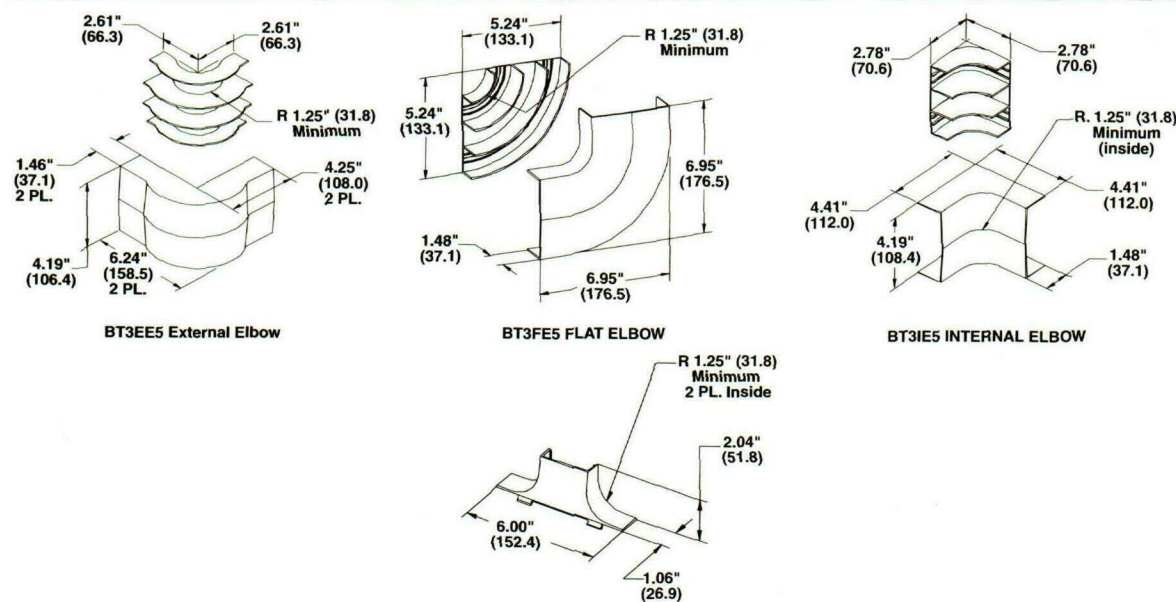
See page O-44 for additional communications plates and inserts.

## Multichannel Raceway

**BASETRAK® Specifications and Capacities****Catalog****Numbers Description****BT3BC5** 5 ft. length (1.52m) base and cover.**BT3BC10** 10 ft. length (3.05m) base and cover.**Materials:** U.V. Stabilized PVC**Listing/Approvals:** UL Listed and  
CSA Certified.**Flammability:** UL 94V-0.**Weight:** .8 lb./foot (1.19kg/m).**National Electrical Code:** Article 352B.**Voltage:** UL 600 Volt rated.**Dimensions in inches (mm)****BaseTrak Capacities (40% Fill)**

|                                      | Power (THHN/T90 Nylon)      |                             |                             | Signal                     | Voice/Data                              |                                         |                                  |                                       |
|--------------------------------------|-----------------------------|-----------------------------|-----------------------------|----------------------------|-----------------------------------------|-----------------------------------------|----------------------------------|---------------------------------------|
|                                      | #14<br>.105" O.D.<br>(2.67) | #12<br>.122" O.D.<br>(3.10) | #10<br>.153" O.D.<br>(3.89) | #22<br>.035" O.D.<br>(.89) | #22 3-U.T. Pair<br>.215" O.D.<br>(5.46) | #24 4-U.T. Pair<br>.180" O.D.<br>(4.57) | 25-Pair<br>.396" O.D.<br>(10.06) | Cat. 5 U.T.P.<br>.242" O.D.<br>(6.15) |
| Each channel without devices         | 14                          | 16                          | 14                          | 630                        | 16                                      | 24                                      | 5                                | 13                                    |
| Channel #1 with in-line box          | 12                          | 10                          | 7                           | 605                        | 16                                      | 23                                      | 4                                | 12                                    |
| Channel #2 (center) with in-line box | 12                          | 10                          | 7                           | 237                        | 6                                       | 9                                       | 1                                | 4                                     |
| Channel #3 with in-line box          | 12                          | 10                          | 7                           | 291                        | 7                                       | 11                                      | 2                                | 6                                     |

$$\text{Number of conductors} = \frac{\text{raceway cross sectional area}}{\text{cross sectional area of (1) conductor}} \times .40$$

**BaseTrak Large Radius Fittings**

BTWTC BASETRAK/WALLTRAK TEE COVER