


Micro-Quick® Control Connectors

Single Key 3 - 5 Pole Plugs


Drawings (in/mm)

Straight Female Plug




A	0.59 (15.0)
B	1.83 (46.5)
C	2.75 (69.9)

Right Angle Female Plug




A	0.59 (15.0)
B	1.44 (36.6)
C	2.75 (69.9)
D	0.67 (17.0)
E	1.15 (29.2)

Right Male In-Line Plug




A	0.59 (15.0)
B	1.44 (36.6)
C	2.75 (69.9)
D	0.67 (17.0)
E	1.38 (35.1)

Straight Male In-Line Plug

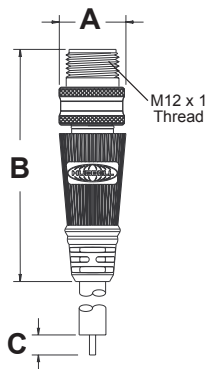

	MALE
A	0.59 (15.0)
B	2.06 (52.3)
C	2.75 (69.9)

Extension Cable

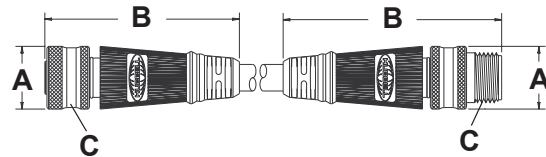

	FEMALE	MALE
A	0.59 (15.0)	0.59 (15.0)
B	1.83 (46.5)	2.06 (52.3)
C	1/2 - 20 UNF Thread	

Cable Diameters By Cable Type

Number of Conductors	#22 AWG PVC	#18 AWG TPE
3	0.21 (5.3)	0.24 (6.1)
4	0.22 (5.7)	0.26 (6.6)
5	0.26 (6.6)	0.28 (7.1)

Conductor Color Code

Contact Number	3 Pole	4 Pole	5 Pole
1	Brown	Brown	Brown
2	Not Used	White	White
3	Blue	Blue	Blue
4	Black	Black	Black
5	Not Used	Not Used	Gray


ACCESSORIES

Dust Caps

Closure caps protect plugs and receptacles when not in use. Thread is M12 x 1.

Catalog

MRCM1



MPCM1

