



Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

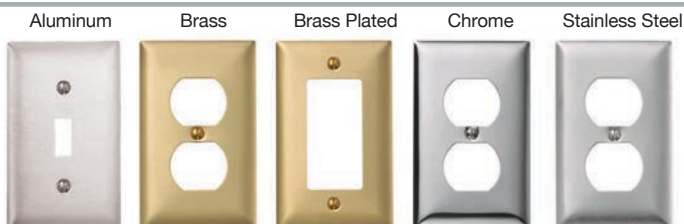
Nylon Wallplates



Nylon Pre-Marked Wallplates



Metal Wallplates




Pre-Marked





Combination Plates, 4- and 5-Gang

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
	Brown	NP38	—	Aluminum	①
	Ivory	NP38I	—	Brass	①
	Light Almond	NP38LA	—	Brass Plated	①
	White	NP38W	—	Chrome	①
				S/S 302/304	SS38
				S/S 430	—
	Black	NP326BK	—	Aluminum	①
	Brown	NP326	—	Brass	①
	Gray	NP326GY	—	Brass Plated	①
	Ivory	NP326I	—	Chrome	①
	Light Almond	NP326LA	—	S/S 302/304	SS326
	White	NP326W	—	S/S 430	—
	Black	NP2262BK	—	Aluminum	①
	Brown	NP2262	—	Brass	①
	Gray	NP2262GY	—	Brass Plated	①
	Ivory	NP2262I	—	Chrome	①
	Light Almond	NP2262LA	—	S/S 302/304	①
	White	NP2262W	—	S/S 430	—
	Brown	NP48	—	Aluminum	①
	Ivory	NP48I	—	Brass	①
	White	NP48W	—	Brass Plated	①
				Chrome	①
				S/S 302/304	①
				S/S 430	—

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

①Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.



Specifications

Listings

Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.

Nylon Plate

Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.

302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass (70% Copper, 30% Zinc) Plate

Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.

Aluminum Plate

Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.

Chrome Plated Steel Plate




Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.

Steel Painted Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.

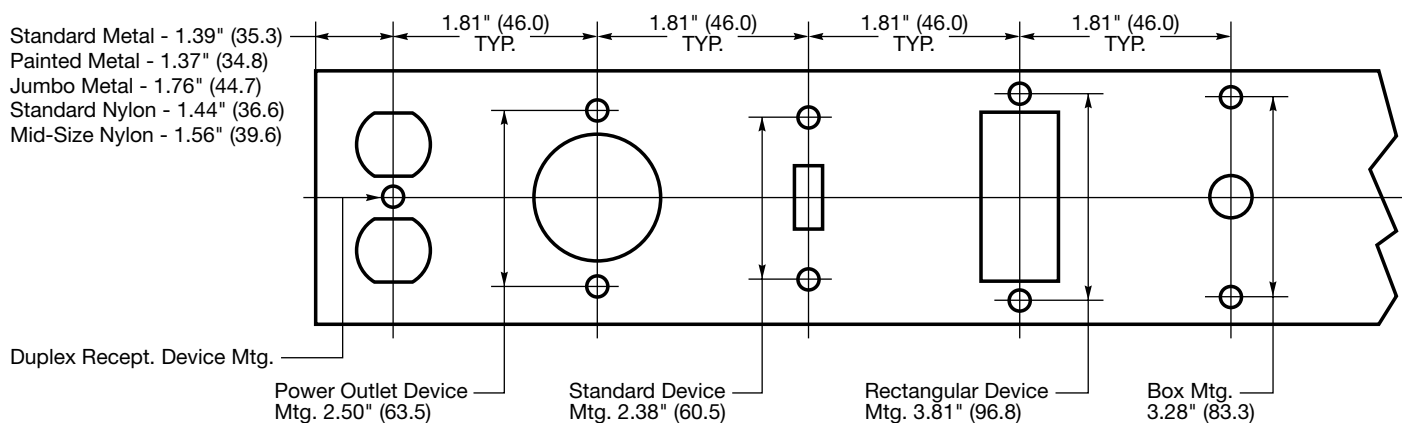


Product Dimensions

	Size	Standard Metal		Painted Metal	Size	Jumbo Metal	
		Height	Width	Width		Height	Width
	1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
	2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
	3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)			
	4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)			
	5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)			
	6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)			
	7-Gang	4.50" (114.3)	13.68" (347.5)				
	8-Gang	4.50" (114.3)	15.44" (392.1)				
	Size	Standard Nylon			Size	Mid-Size Nylon	
		Height	Width			Height	Width
	1-Gang	4.63" (117.6)	2.88" (73.2)		1-Gang	4.88" (124.0)	3.13" (79.5)
	2-Gang	4.63" (117.6)	4.69" (119.1)		2-Gang	4.88" (124.0)	4.94" (125.4)
	3-Gang	4.63" (117.6)	6.50" (165.1)		3-Gang	4.88" (124.0)	6.75" (171.5)
	4-Gang	4.63" (117.6)	8.31" (211.1)		4-Gang	4.88" (124.0)	8.56" (217.4)
	5-Gang	4.63" (117.6)	10.12" (256.1)				
	6-Gang	4.63" (117.6)	11.93" (303.0)				
	Size	Snap-On Nylon					
		Height	Width				
	1-Gang	4.68" (118.9)	2.94" (74.7)				
	2-Gang	4.68" (118.9)	4.75" (120.7)				
	3-Gang	4.68" (118.9)	6.56" (166.6)				
	4-Gang	4.68" (118.9)	8.37" (212.6)				
	5-Gang	4.68" (118.9)	10.18" (258.6)				
	6-Gang	4.68" (118.9)	11.99" (304.5)				

Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical



Note: Specifications are subject to change without notice.