



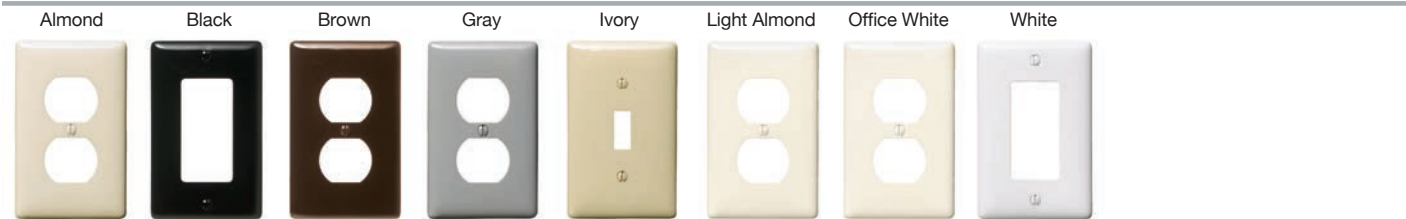
Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

Nylon Wallplates



Nylon Pre-Marked Wallplates



Metal Wallplates



Pre-Marked



Telephone and Coaxial Outlet Plates

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
 1-Gang, 1-Tel Nylon .406 in. (10.3) Hole, Metal .640 in. (16.3) Hole, Box Mount	Almond	NP11AL	NPJ11AL	Aluminum	①
	Black	NP11BK	—	Brass	①
	Brown	NP11	NPJ11	Brass Plated	①
	Gray	NP11GY	—	Chrome	①
	Ivory	NP11I	NPJ11I	S/S 302/304	SS11*
	Light Almond	NP11LA	NPJ11LA	S/S 430	SS11L*
	Red	NP11R	—		
	White	NP11W	NPJ11W		
 1-Gang, 1-Tel Nylon .406 in. (10.3) Hole, Metal .640 in. (16.3) Hole, Strap Mount	Almond	NP12AL	—	Aluminum	①
	Black	NP12BK	—	Brass	SB12*
	Brown	NP12	—	Brass Plated	SBP12*
	Gray	NP12GY	—	Chrome	SCH12*
	Ivory	NP12I	—	S/S 302/304	SS12*
	White	NP12W	—	S/S 430	SS12L*
 1-Gang, 1-Tel .625 in. (15.9) Hole, Box Mount	Almond	NP737AL	—	Aluminum	—
	Brown	NP737	—	Brass	—
	Ivory	NP737I	—	Brass Plated	—
	White	NP737W	—	Chrome	—
				S/S 302/304	—
				S/S 430	—
 1-Gang, 1-Tel .625 in. (15.9) Hole, Strap Mount	Brown	NP730	—	Aluminum	—
	Ivory	NP730I	—	Brass	—
	White	NP730W	—	Brass Plated	—
				Chrome	—
				S/S 302/304	—
				S/S 430	—
 1-Gang, 1-Tel .380 in. (9.7) Hole, Box Mount or Strap Mount	Almond	—	—	Aluminum	①
	Brown	—	—	Brass	①
	Ivory	—	—	Brass Plated	①
	White	—	—	Chrome	①
				S/S 302/304	SS739
				S/S 302/304, Strap Mount	SS738
				S/S 430	—
 2-Gang, 2-Tel Nylon .406 in. (10.3) Hole, Metal .640 in. (16.3) Hole, Box Mount	Black	NP21BK	—	Aluminum	①
	Brown	NP21	—	Brass	①
	Gray	NP21GY	—	Brass Plated	①
	Ivory	NP21I	—	Chrome	①
	White	NP21W	—	S/S 302/304, Strap Mount	SS22*
				S/S 430	—
 2-Gang, 1-Tel .640 in. (16.3) Hole, Box Mount	Almond	—	—	Aluminum	—
	Brown	—	—	Brass	—
	Ivory	—	—	Brass Plated	—
	White	—	—	Chrome	—
				S/S 302/304	SS741*
				S/S 430	—

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

*.50" (12.7) I.D. nylon bushing provided.



Specifications

Listings

Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.

Nylon Plate

Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.

302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass (70% Copper, 30% Zinc) Plate

Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.

Aluminum Plate

Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.

Chrome Plated Steel Plate




Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.

Steel Painted Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.

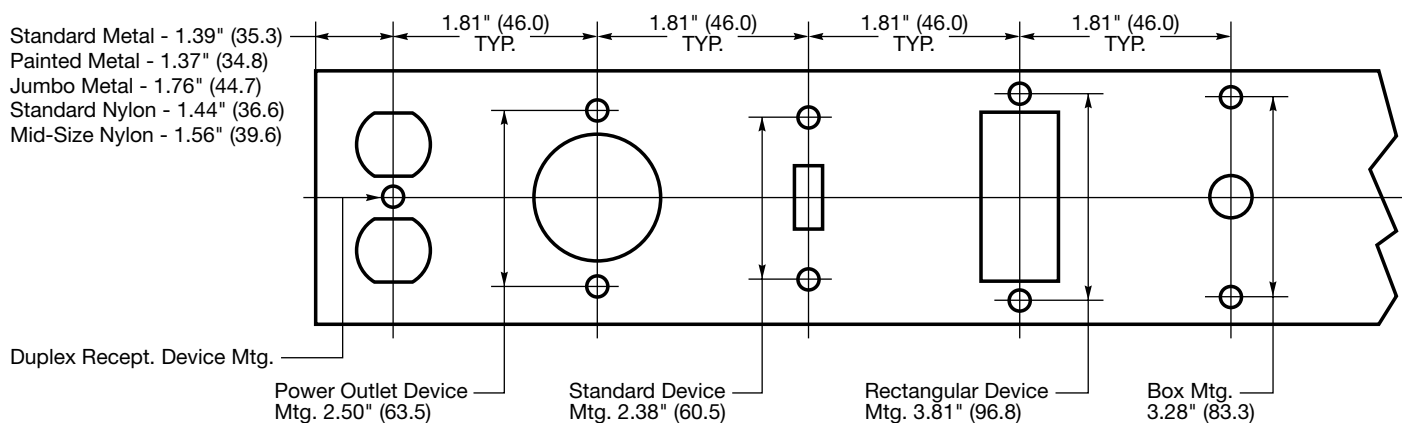


Product Dimensions

	Size	Standard Metal		Painted Metal	Size	Jumbo Metal	
		Height	Width	Width		Height	Width
	1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
	2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
	3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)			
	4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)			
	5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)			
	6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)			
	7-Gang	4.50" (114.3)	13.68" (347.5)				
	8-Gang	4.50" (114.3)	15.44" (392.1)				
	Size	Standard Nylon			Size	Mid-Size Nylon	
		Height	Width			Height	Width
	1-Gang	4.63" (117.6)	2.88" (73.2)		1-Gang	4.88" (124.0)	3.13" (79.5)
	2-Gang	4.63" (117.6)	4.69" (119.1)		2-Gang	4.88" (124.0)	4.94" (125.4)
	3-Gang	4.63" (117.6)	6.50" (165.1)		3-Gang	4.88" (124.0)	6.75" (171.5)
	4-Gang	4.63" (117.6)	8.31" (211.1)		4-Gang	4.88" (124.0)	8.56" (217.4)
	5-Gang	4.63" (117.6)	10.12" (256.1)				
	6-Gang	4.63" (117.6)	11.93" (303.0)				
	Size	Snap-On Nylon					
		Height	Width				
	1-Gang	4.68" (118.9)	2.94" (74.7)				
	2-Gang	4.68" (118.9)	4.75" (120.7)				
	3-Gang	4.68" (118.9)	6.56" (166.6)				
	4-Gang	4.68" (118.9)	8.37" (212.6)				
	5-Gang	4.68" (118.9)	10.18" (258.6)				
	6-Gang	4.68" (118.9)	11.99" (304.5)				

Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical



Note: Specifications are subject to change without notice.