

AV In-Wall Enclosure  
15A, 125V  
Recessed TR Duplex Receptacle

HUBBELL

Features

- Tamper-Resistant (TR) duplex
- Easily mounts to a one gang box
- Back and side wiring

Ordering Information

| Description                       | Device Color | UPC         | Catalog Number |
|-----------------------------------|--------------|-------------|----------------|
| Smooth face, back and side wired. | Ivory        | 88377830571 | RR1510I        |

Listings


UL Listed to UL 498  
CSA Certified 22.2, No. 42

Specifications

|                                 |                        |
|---------------------------------|------------------------|
| Face                            | Nylon                  |
| Base                            | PVC                    |
| Power Contacts                  | .030 in. (.8mm) Brass  |
| Ground Contacts                 | .014 in. (.35mm) Brass |
| Terminal Screws                 | Plated Steel           |
| Automatic Self-grounding Staple | Stainless steel        |
| Mounting Screws                 | Zinc Plated Steel      |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 1,500V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #14-12 AWG stranded or solid copper conductor only       |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |                                                          |
| Flammability            | UL 94 V-2                                                |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

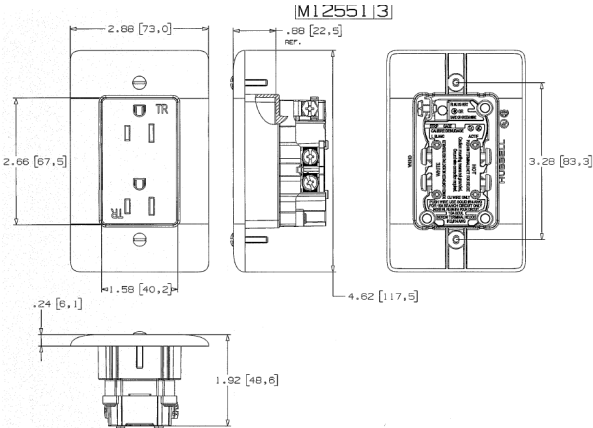

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

