



Marine Products Boatyard Accessory Items

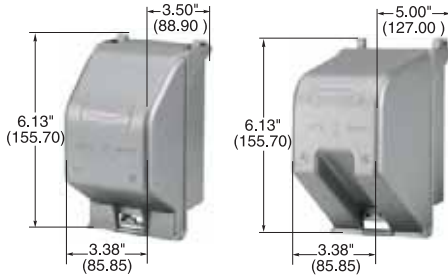

WP8M

WP7D

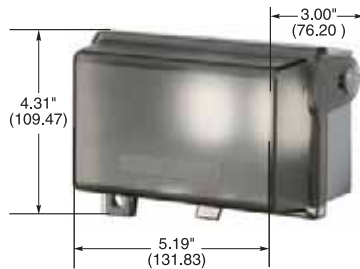

WP826MHP



WP826MP



HBL6085



HBL10CM22S



Wiring Device-Kellems

www.hubbell-wiring.com

Marine Grade Outlet Box Hoods

Description	Catalog Numbers
Cast aluminum outlet box hood: for duplex receptacles, vertical mount.	WP8M
Cast aluminum outlet box hood; for GFCI/Style Line receptacle; vertical mount.	WP26M
Same as #WP8M except horizontal mount.	WP8MH
Same as #WP26M except horizontal mount.	WP26MH
Cast aluminum outlet box hood; for 15A & 20A single straight blade receptacles; vertical mount.	WP7D
Cast aluminum outlet box hood; for 20A & 30A single locking receptacles; vertical mount.	WP723D
Non-metallic outlet box hood; for duplex, GFCI and Style Line® receptacles; vertical mount.	WP826MP
Same as #WP826MP except horizontal mount.	WP826MHP

Metallic

- Die cast Alloy 360 copper-free aluminum for maximum corrosion resistance and durability. Alloy 360 has less than .004% copper content.
- Finish is baked aluminum lacquer.

Non-metallic

- Impact resistant polycarbonate, an extremely durable thermoplastic.
- Transparent cover provides visibility to the connection.
- ALL**
- NEMA 3R rating when used with the appropriate weatherproof outlet box which is intended for outdoor use primarily to provide a degree of protection against rain, sleet, and

damage from external ice formation.

- Box or device mount for flexibility of installation.
- Gaskets are closed-cell foam.
- Meets OSHA lockout/tagout requirements.
- Latching covers hold securely.
- Large cord openings.
- Clearly marked UL and CSA logos.
- Covers include gasket and mounting screws. Lids have gasketless design.
- UL Listed/CSA Certified.
- Devices not included.
- Holes for padlocks are 1/4" (6.4 dia.).
- Drill points in four corners for box mounting.

Nylon Watertight Strain Relief Cord Connectors

These Hubbell nylon cord connectors provide strain relief and a watertight seal where cable enters a piece of equipment, panel, or box. A patented GOTCHA® ring, with a split and hinge design, allows for better adjustment to the cord as the connector nut is tightened, providing superior cord gripping compared to other types. A soft neoprene bushing compresses to keep liquids out and allows the nut to be easily tightened.

Description	Catalog Numbers
A gray male PVC adapter with 3/4" N.P.T. pipe thread for adapting PVC conduit to FS and FD boxes with 3/4" N.P.T. hub (#HBL6080, #HBL6080OS, #HBL60CM83). Not UL Listed.	HBL6085
Straight nylon cord connector, N.P.T. hub size 1/2", diameter range .250"-.375" (6.4-9.5).	HBL10CM22S
Straight nylon cord connector, N.P.T. hub size 1/2", diameter range .375"-.500" (9.5-12.7).	HBL10CM23S*
Straight nylon cord connector, N.P.T. hub size 3/4", diameter range .375"-.500" (9.5-12.7).	HBL10CM35S*
Straight nylon cord connector, N.P.T. hub size 3/4", diameter range .500"-.625" (12.7-15.9).	HBL10CM36S*
Straight nylon cord connector, N.P.T. hub size 3/4", diameter range .625"-.750" (15.9-19.1).	HBL10CM37S*
Straight nylon cord connector, N.P.T. hub size 1", diameter range .625"-.750" (15.9-19.1).	HBL10CM41S*

* Not shown.