



KT-LED27HID-H-E26-850-D

HID REPLACEMENT LED LAMP

DESCRIPTION

27W HID Replacement LED Lamp | 5000K | 85 CRI | IP64 Rated



LAMP TYPE: HID Replacement LED

BASE TYPE: E26 (Medium) Rotatable

WATTAGE: 27W

COLOR TEMPERATURE: 5000K

METAL HALIDE EQUIVALENT: 100W

COLOR RENDERING INDEX (CRI): 85

WARRANTY: 5 Years



PRODUCT FEATURES

- Replacement for conventional metal halide lamp
- Ideal for wallpack retrofit applications
- Optimized for horizontal applications with directional light output from opening LED assembly construction
- Non-dimmable; do not dim
- 50,000+ hour lifetime
- Environmentally friendly: No mercury used
- Instant startup
- UL Listed; Listed on DLC QPL
- Operating temperature: -40°C/-40°F to 45°C/113°F in enclosed fixture
- Integral driver, eliminates the need for external driver or ballast; includes 4kV surge protection
- IP64 Rated; integrated heat sink quickly dissipates heat and guides water intrusion out of the lamp
- Horizontal orientation
- Suitable for use in fully enclosed fixture. Minimum lamp compartment dimensions: 8in x 8in x 8.7in

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input Voltage	Power Consumption	Power Factor	Input Current
120-277Vac	27W	>0.9	0.23A @ 120V 0.10A @ 277V


RATED LIFE

L70 (Hours)	50,000
-------------	--------


PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	5000K
Luminous Flux	4100 lm
Color Rendering Index (CRI)	85
Efficacy	152 lm/W
Beam Angle	180°

SPECTRAL DISTRIBUTION

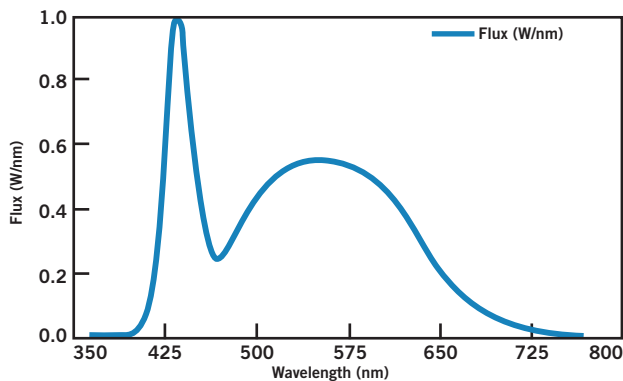

LUX DISTANCE CURVE

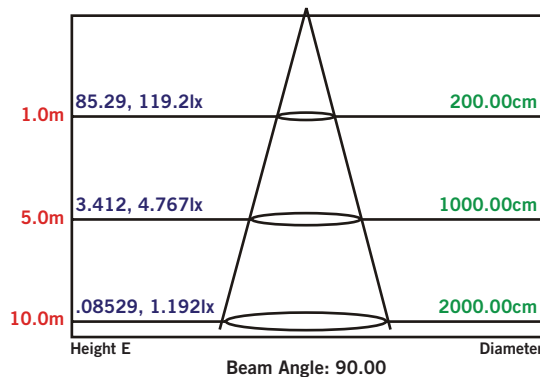



KT-LED27HID-H-E26-850-D

HID REPLACEMENT LED LAMP

WIRING INSTRUCTIONS

STEP 1

Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

STEP 2


Rewire for line voltage to the lamp socket. Lamp is compatible with 120-277V from single phase, three phase wye, and three phase delta systems.

STEP 3


Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.

STEP 4


Rotate lamp base and open wings accordingly toward direction of desired lumination.

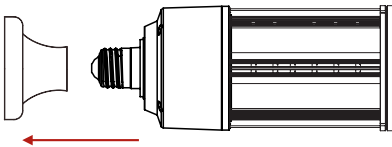


STEP 1

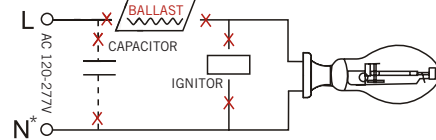


STEP 2

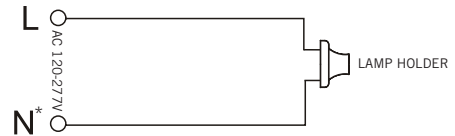

STEP 3

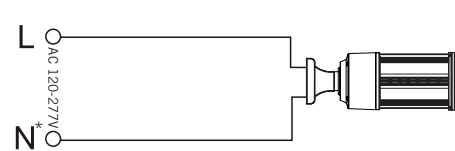


STEP 4

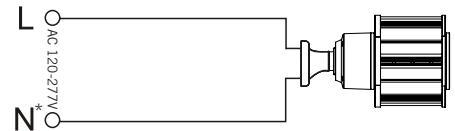


*or other line for certain three phase systems such as 120/208 three phase wye systems

PHYSICAL CHARACTERISTICS

Wings Closed

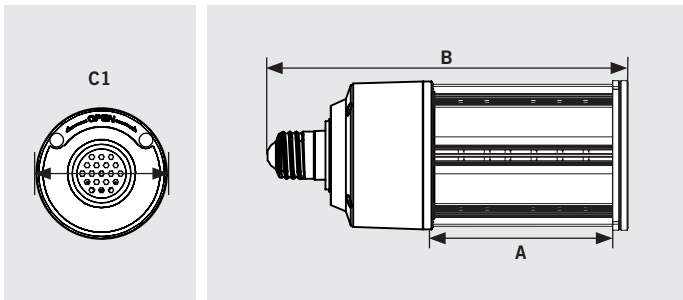

Wings Open

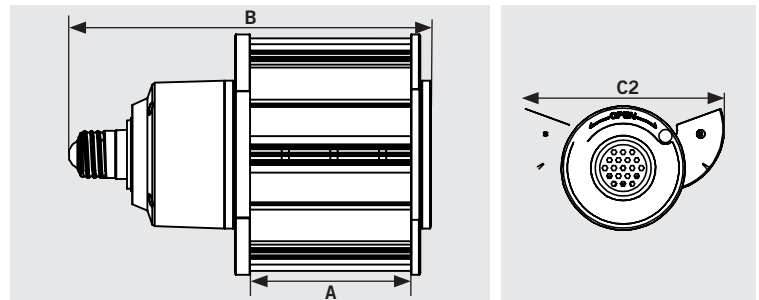

LAMP DIMENSIONS

A (Illuminated Length)	3.62"	C (Diameter)	3.23"
B (Body Length)	8.10"	C2 (Width, Wings Open)	5.26"

BASE TYPE: E26 (Medium) Rotatable



KT-LED27HID-H-E26-850-D

HID REPLACEMENT LED LAMP

ORDERING INFORMATION

ORDER CODE	PACK QTY.	EASY CODE	UPC
KT-LED27HID-H-E26-850-D-DP	16	ZJL-39	843654121499

CATALOG NUMBER BREAKDOWN

KT-LED27HID-H-E26-850-D-DP

1 2 3 4 5 6 7 8 9 10

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Horizontal Orientation
- 6 Base Type
- 7 800 Series
- 8 Color Temperature
- 9 DirectDrive Series
- 10 Packaging Style