



KT-LED62P-HS-8XX-D


2-PIN LED LAMP

DESCRIPTION

6W 2-Pin LED Lamp | 2700–4000K | ≥ 83 CRI
Line Voltage Compatible



LAMP TYPE: Compact
BULB TYPE: 2-Pin LED
BASE TYPE: Gx23
WATTAGE: 6W
COLOR TEMPERATURE: 2700–4000K
COLOR RENDERING INDEX (CRI): ≥ 83
WARRANTY: 5 Years

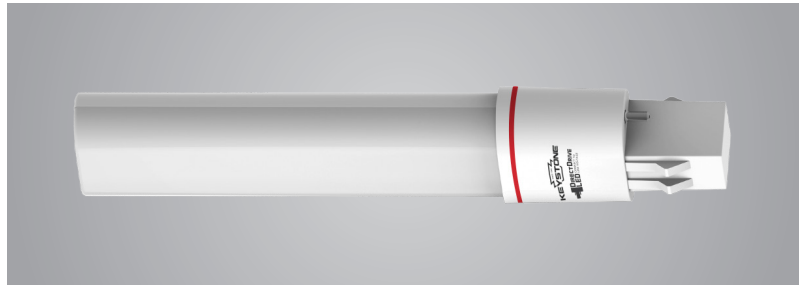

PRODUCT FEATURES

- Replaces 13W Gx23 CFL Lamps
- 50,000+ Hour Lifetime
- Approximately 50% More Energy Efficient than Traditional CFL Lamps
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Frosted Lens Eliminates Pixelation
- Suitable for dry and damp locations
- UL Classified
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- Up to 5x Longer Life than Traditional CFL Lamps
- Non-Dimmable
- Compliant with FCC Part 15 Class B
- Suitable for open fixtures

OPERATING SPECIFICATIONS


ELECTRICAL CHARACTERISTICS

Input Voltage	Lamp Wattage	Power Factor
120-277V	6W	>0.9

PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	2700K	4000K
Luminous Flux	500 lm	550 lm
Color Rendering Index (CRI)	≥ 82	≥ 82
Bare Lamp Efficacy	83 lm/W	92 lm/W
Beam Angle	>120°	>120°

SPECTRAL DISTRIBUTION

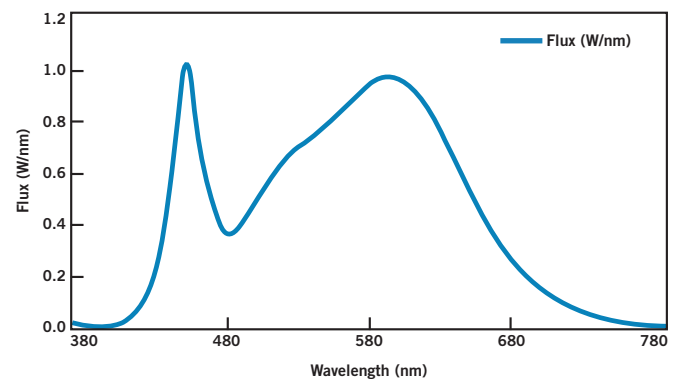

RATED LIFE

L70 (Hours)	50,000
-------------	--------


KT-LED62P-HS-8XX-D

2-PIN LED LAMP


WIRING

BYPASS MAGNETIC BALLAST WITH 1 LAMP (Gx23 SOCKET)

BEFORE




AFTER




BYPASS MAGNETIC BALLAST WITH 2 LAMPS (Gx23 SOCKET)


BEFORE



AFTER



PHYSICAL CHARACTERISTICS

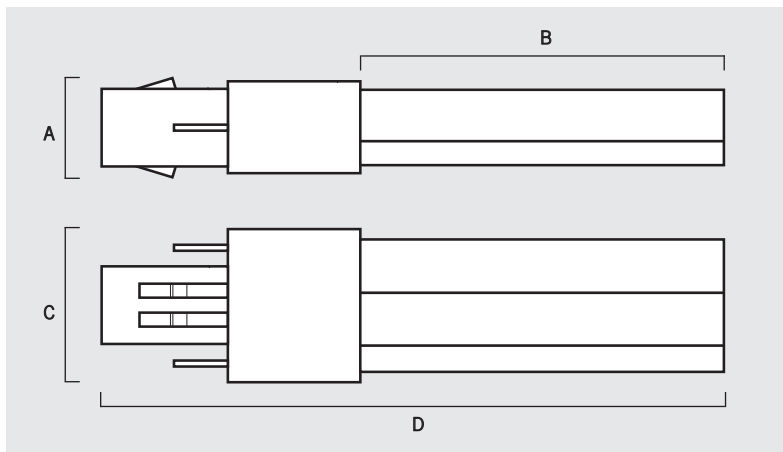

LAMP DIMENSIONS

A (Depth)	0.83"
B (Illuminated Length)	5.15"
C (Width)	1.34"
D (Length)	6.06"

ORDERING INFORMATION

CATALOG NUMBER	PACK QTY.	EASY CODE	UPC
KT-LED62P-HS-827-D	10	TBB-07	843654127019
KT-LED62P-HS-840-D	10	TBI-11	843654127026

CATALOG NUMBER BREAKDOWN

KT-LED62P-HS-8XX-D

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Orientation
- 6 Slim Profile
- 6 800 Series
- 7 Color Temperature
- 8 Combo Drive Series