



KT-RKIT28AC-7C-9XX-FDIM

DESCRIPTION

90 CRI AC LED Light Engine



PRODUCT FEATURES

- L70 > 50,000 Hours
- Operating Temperature: 0°F-104°F, -18°C-40°C
- UL Classified
- High Factor >.90
- T24 JA8 Compliant (2700K and 3000K Only)
- Seoul LEDs
- Suitable for Fully Enclosed Fixtures
- THD <20%
- 5% Minimum Dimming, Low Flicker
- Comes with mounting accessories
- Pre-assembled with Metal Heatsink 5VA Cover

PERFORMANCE SPECIFICATIONS

Size	Catalog Number	Color Temp	CRI	Wattage	Lumens	Efficacy	Input Voltage	Dimming Method
7" Round	KT-RKIT28AC-7C-927-FDIM	2700K	>90	28W	2046	74 lm/W	120V	Phase Control
	KT-RKIT28AC-7C-930-FDIM	3000K	>90	28W	2160	80 lm/W	120V	Phase Control
	KT-RKIT28AC-7C-940-FDIM	4000K	>90	28W	2220	82 lm/W	120V	Phase Control
	KT-RKIT28AC-7C-950-FDIM	5000K	>90	28W	2280	83 lm/W	120V	Phase Control

COMPATIBLE DIMMERS

Manufacturer	Model Number
Lutron	S-600PR-WH
Lutron	TGCL-153PH-WH
Lutron	MACL-153MH-LA
LEVITON	WA-RXX-06674-12A

EQUIVALENCES


- 2 x 75W Incandescent
 - 2 x 18W CFL
 - 32W T9 Circline
- Designed for 13" Ceiling Mount**

For questions on additional dimmer compatibility, please contact Keystone.



KT-RKIT28AC-7C-9XX-FDIM

DIMENSIONS

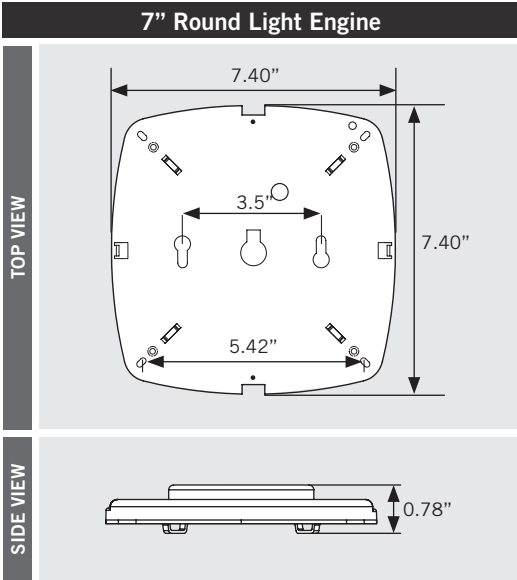

CATALOG NUMBER BREAKDOWN

KT-RKIT28AC-7C-9XX-FDIM

1

2

3

4

5

6

7

8

1. Keystone Technologies
2. Future Fit Kit
3. Wattage
4. Alternating Current
5. 3" Circular
6. 900 Series
7. Color Temperature
8. Phase Control Dimming