

Constant current LED driver
Total power: 25W
Input voltage: 120Vac $\pm$ 10%
Number of outputs: One
UL 8750
IP20 design for dry and damp location
Dimmable with leading / trailing edge dimmer
5 year warranty

ELECTRICAL SPECIFICATIONS

Input voltage range:	120Vac $\pm$ 10%
Frequency:	60Hz
Power factor:	> 0.9 under 120Vac input with 80~100% load condition (for all output currents)
Inrush current:	10A @120V
Max input current:	0.27A @120V
THD:	< 20% under 120Vac input with 80~100% load condition (for all output currents)
Load Regulation:	$\pm$ 2%
Line Regulation:	$\pm$ 1%
Voltage Tolerance:	$\pm$ 5% at full load condition
Turn-on Delay Time:	< 0.75s at full load condition
Overshoot:	< 10% at full load condition
No Load Power Consumption:	< 2W
Ripple & Noise (pk-pk):	< 10%
Withstand voltage:	Input to output, 2,800Vdc, 2mA
Leakage current:	Maximum 0.5mA at 120Vac, 60Hz input
Protection:	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceed specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceed specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-40 to 60°C
Storage temperature:	-40 to 85°C
Humidity:	5% to 95%
MTBF:	440,000 hours at 40°C ambient (~70°C Case temp)
Life rating:	82,500 hours at 120Vac input, 100% load and 60°C case temperature
Maximum case Temperature :	90°C

SAFETY AND EMC COMPLIANCE

UL/cUL	UL 8750
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C

PRODUCT SPECIFICATIONS

Model Number	Max output power	Output Current	Output Voltage	OCV	Efficiency at 120V (Typ.)	Remote mounting distance (#18 AWG)	Class 2	
							US	Canada
KTLD-25-1-XXX-FDIM-600-AF4	25W	600mA	21-42V	48V	82%	64 ft	✓	✓
KTLD-25-1-XXX-FDIM-700-AF4	25W	700mA	18-36V	42V	82%	54 ft	✓	✓
KTLD-25-1-XXX-FDIM-800-AF4	25W	800mA	16-32V	37V	82%	48 ft	✓	✓
KTLD-25-1-XXX-FDIM-900-AF4	25W	900mA	14-28V	35V	82%	42 ft	✓	✓
KTLD-25-1-XXX-FDIM-1000-AF4	25W	1000mA	13-25V	32V	82%	38 ft	✓	✓
KTLD-25-1-XXX-FDIM-1100-AF4	25W	1100mA	12-23V	30V	81%	34 ft	✓	✓
KTLD-25-1-XXX-FDIM-1200-AF4	25W	1200mA	11-21V	27V	81%	32 ft	✓	✓
KTLD-25-1-XXX-FDIM-1300-AF4	25W	1300mA	10-19V	25V	81%	29 ft	✓	✓
KTLD-25-1-XXX-FDIM-1380-AF4	25W	1380mA	9-18V	24V	81%	27 ft	✓	✓

PHYSICAL DIMENSIONS


Length (L):	5.49" (139.5mm)
Width (W):	1.30" (33mm)
Height (H):	0.79" (20mm)
Mounting (M):	5.20" (132mm)

PACKAGING


0.14kg / unit ; 40pcs / carton ; 3,120pcs / pallet	
Carton size:	330 x 200 x 135 mm
Carton weight:	6 kg
Case Material:	Plastic

WIRE SPECIFICATIONS


Input:	12", UL 1569 #18AWG (Black and White)
Output:	12", UL 1569 #18AWG (Red and Blue)

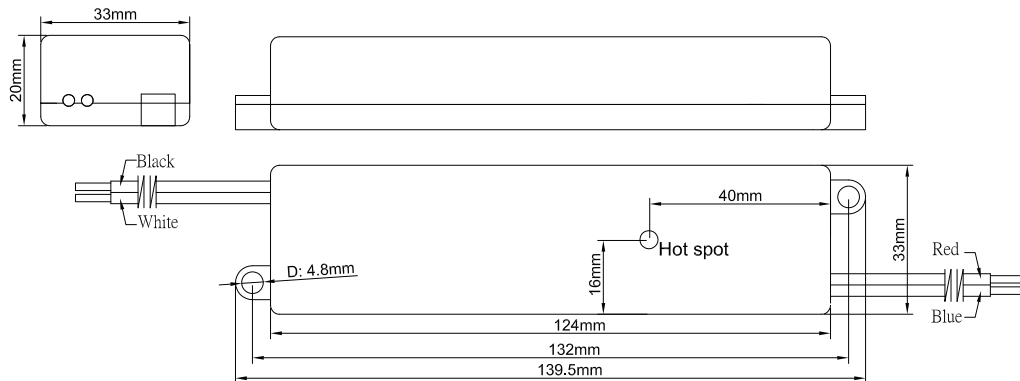


WIRING DIAGRAM

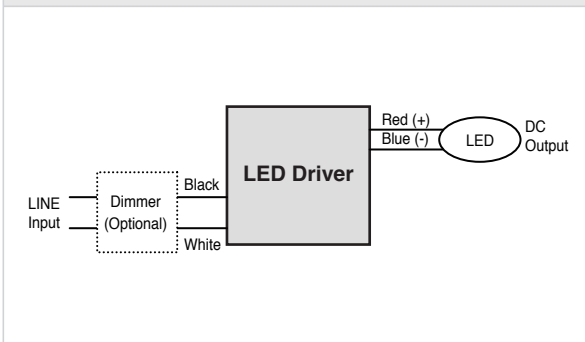


LIFETIME vs CASE TEMPERATURE

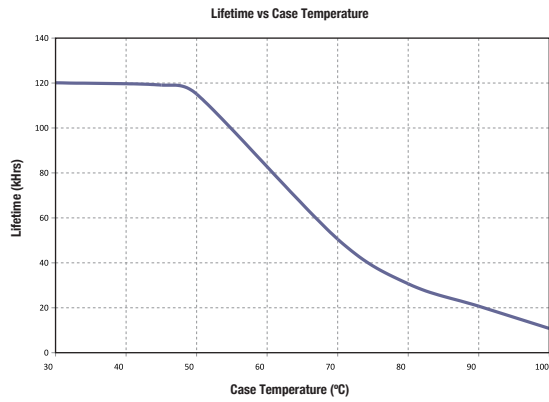

POWER DERATING vs CASE TEMPERATURE

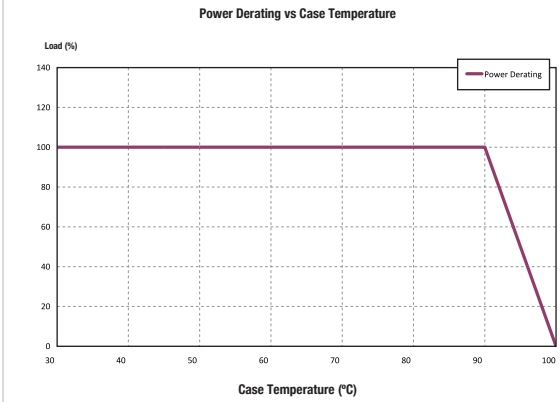

POWER FACTOR vs LOAD

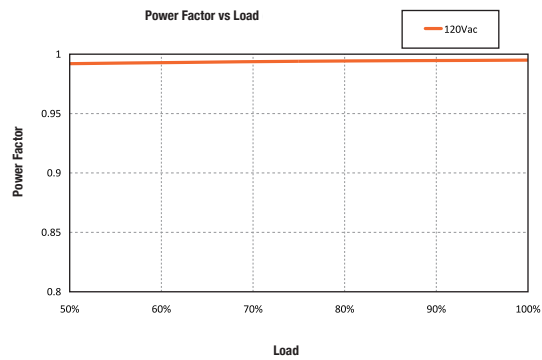

EFFICIENCY vs LOAD

